


CODE NO.	ITEM
1-30831-31	Canonet G-III 17 w/lens 40mm f/1.7 in case
1-30831-33	Canonet G-III 17 Kit (w/Canolite D)

Canon Canonet G-III 17

The Simple Camera with Sophisticated Performance

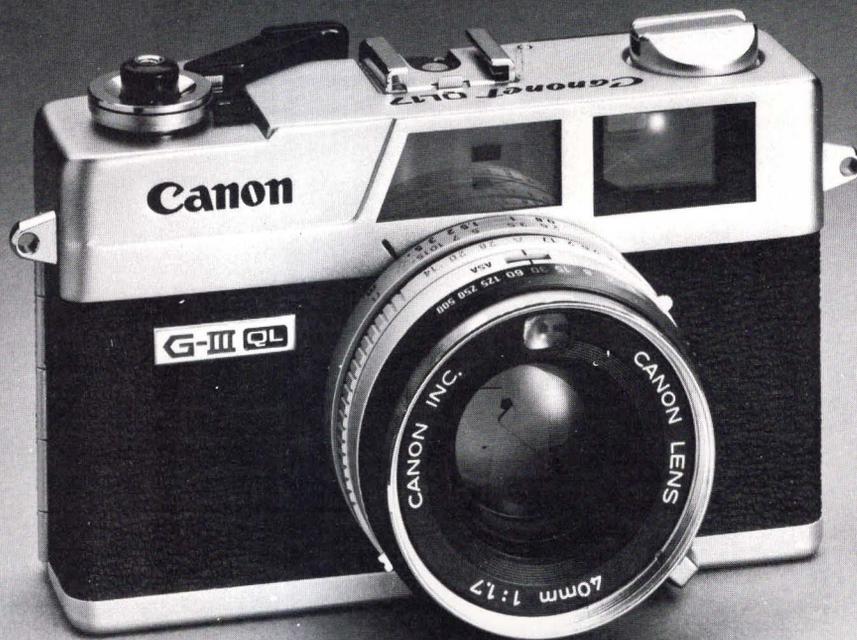

SPECIFICATIONS

- **Type:** 35mm lens shutter type rangefinder camera with Electric Eye
- **Picture Size:** 24x36mm
- **Lens:** Canon lens 40mm f/1.7; 6 element, 4 group construction with four newly developed glasses; Spectra Coated
- **Viewfinder:** viewfinder combined with rangefinder, bright frame with automatic parallax correction system, aperture scale, exposure indicator, over/under exposure warning marks
- **EE Mechanism:** built-in exposure meter with CdS photocell for fully automatic exposure control; shutter speed priority system
- **Exposure Meter Coupling Range:** EV3.5 (f/1.7, 1/4 sec.) to EV17 (f/16, 1/500 sec.) with ASA 100 film
- **Film Speed Scale:** ASA 25-800
- **Power Source:** one 1.3V M20 (#625) mercury battery, battery checker built-in.
- **Manual control of aperture:** possible at any f/stop by releasing EE mechanism
- **Shutter:** between-the-lens leaf type shutter; speeds from 1/4 to 1/500 sec. plus B; X synchronization; built-in self timer
- **Flash Contacts:** accessory shoe with direct contact, exclusive for Canolite D; conventional flash socket
- **Canolite D:** exclusive Canolite D for use with Canonet G-III 17; cordless operation with direct contact in accessory shoe; EE circuit is coupled to shooting distance for automatic flash photography; powered by two 1.5V alkaline AA (penlight) batteries
- **Flash-Auto Mechanism for Other Flash Units:** f/stop is coupled to shooting distance at guide numbers 14, 20, 28 (m) with ASA 100 film; shutter release button is locked when outside coupling range
- **Film Loading:** exclusive QL (Quick Loading) mechanism accepts any standard 35mm film cassette
- **Winding Lever:** single-stroke, 127°; film transport indicator and shutter cocked indicator built-in
- **Frame Counter:** Resets automatically when camera back is opened.
- **Filter Size:** 48mm
- **Size:** 120x75x60mm (4¾"x3"x2¾")
- **Weight:** 620g (1 lb. 5⅞ oz.)

SELLING POINTS




AUTOMATIC EXPOSURE, DAY OR NIGHT

- With the G-III 17, *any* photographer, professional or newcomer can get perfect exposures in *any* lighting, thanks to the camera's fail-safe automatic exposure system.
- At the beach or in the snow, the contrast may be high. By switching the G-III 17 to manual operation, difficult exposure situations like these pose no problem.
- At *night*, the G-III 17's automatic too, with the optional and exclusive Canolite D electronic flash unit. The user will never have to worry again about calculating proper exposures for flash - the Canolite D will do it for him.


TRADITIONAL CANON OPTICAL QUALITY

- The compact, fast Canon 40mm f/1.7 lens is superbly sharp and perfectly color corrected. It will give the user years of sharp, top-quality photographs.
- Canon's experience in the production of fine optics for every application makes the G-III 17's lens equivalent to lenses costing many times more.




BUILT-IN BATTERY CHECKER

- The G-III 17 owner need never worry about ruined rolls of film due to battery failure: the strength of the battery is checked by simply pressing a red button. A blue lamp will light when the battery is good.




TOTAL INFORMATION VIEWFINDER

- The user never has to guess when his subject is in sharpest focus with the G-III 17, thanks to its built-in coupled rangefinder and its simple coincidence-type operation.
- There's no danger of image cutoff in the final prints and slides taken with the G-III 17, because of its built-in automatic parallax correction that tells the user just what's in the picture, at every focusing distance.
- Full viewfinder information includes: aperture scale, exposure indicator and over/under exposure warning marks which indicate that either flash or a Canon ND filter must be used. The eye need never be taken from the finder even when the action is at its peak.
- The G-III 17 has a built-in safety lock feature: the shutter will only operate when light is sufficient for proper exposure. This means no more lost frames or ruined rolls of film.

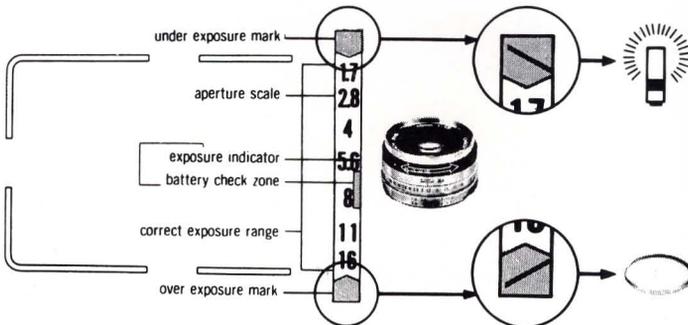


BUILT-IN SAFETY FEATURES

- QL quick film loading system permits simple, fast and secure film loading with any standard 35mm film.
- The film transport indicator shows if film is being wound through the camera. This will prevent the possibility of unexposed rolls.
- After closing the G-III 17's back, the user simply winds the film advance lever until it stops. It will come to rest automatically at the first frame, ready for exposure.

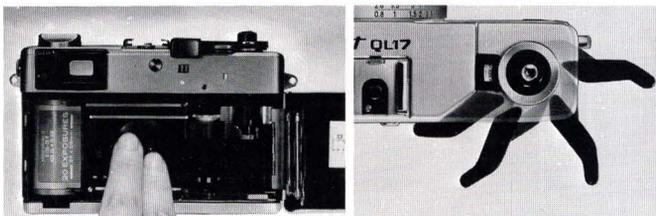

NOMENCLATURE

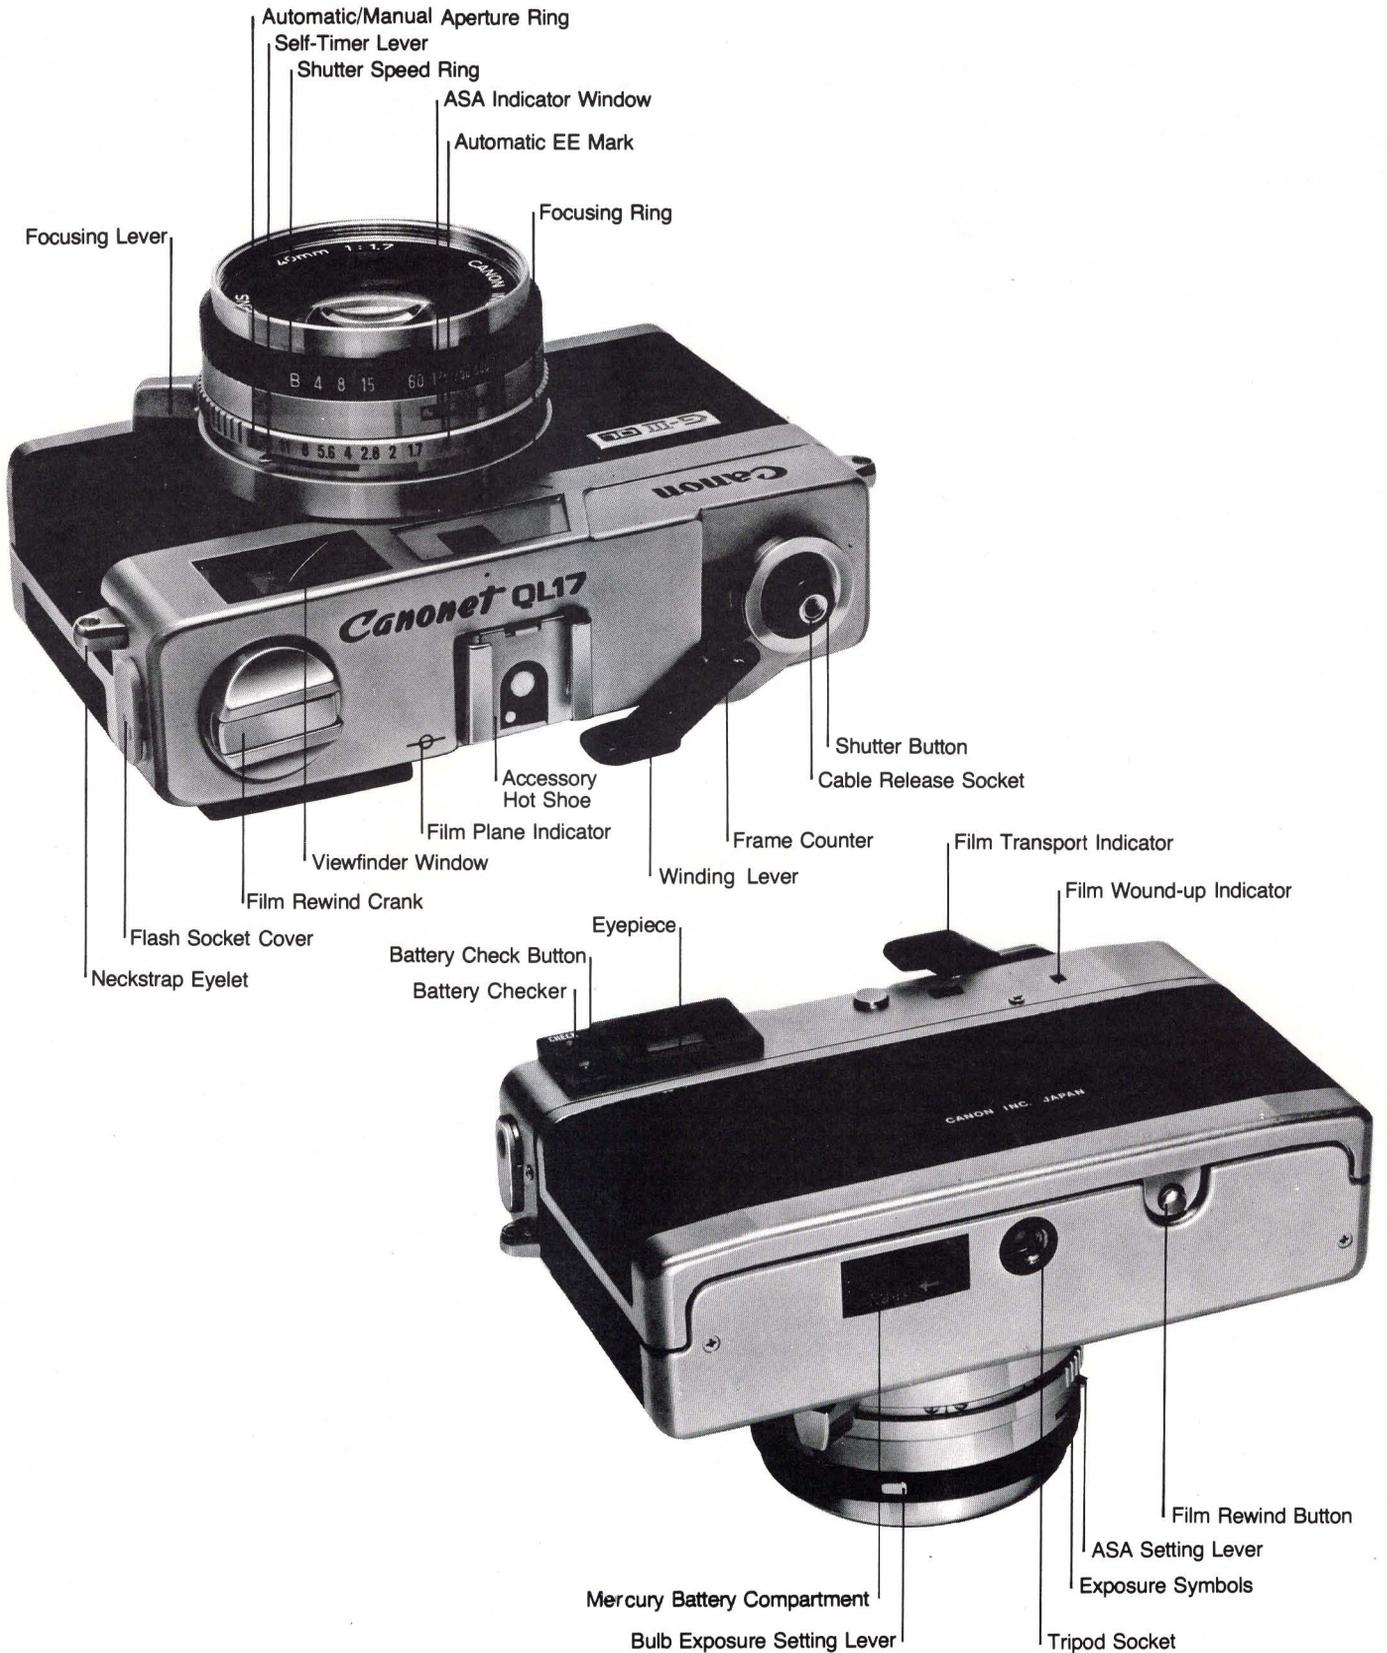

ACCESSORIES

CODE NO.	DESCRIPTION
5-00242-20	Canolite D
5-63061-00	Release 30
5-63062-00	Release 50
4-45015-00	Canonet Hood 4
4-60783-01	Eveready Case for Canonet
5-61111-00	Neck Strap 4 with pad

PLEASE NOTE: For further information on Canon Rangefinder accessories, please refer to the last page in this section.