Canon

EOS 5Ds EOS 5Ds R





Introduction

The EOS 5DS/EOS 5DS R is a digital single-lens reflex camera featuring a full-frame CMOS sensor (approx. 36.0 mm x 24.0 mm) with approx. 50.6 effective megapixels, Dual DIGIC 6, approx. 100% viewfinder coverage, high-precision and high-speed 61-point AF, approx. 5.0 fps continuous shooting, 3.2-inch LCD monitor, Live View shooting, and Full High-Definition (Full HD) movie shooting.

Before Starting to Shoot, Be Sure to Read the Following

To avoid botched pictures and accidents, first read the "Safety Precautions" (p.20-22) and "Handling Precautions" (p.23-25).

Refer to This Manual While Using the Camera to Further Familiarize Yourself with the Camera

While reading this manual, take a few test shots and see how they come out. You can then better understand the camera.

Testing the Camera Before Use and Liability

After shooting, play images back and check whether they have been properly recorded. If the camera or memory card is faulty and the images cannot be recorded or downloaded to a computer, Canon cannot be held liable for any loss or inconvenience caused.

Copyrights

Copyright laws in your country may prohibit the use of your recorded images of people and certain subjects for anything but private enjoyment. Also be aware that certain public performances, exhibitions, etc., may prohibit photography even for private enjoyment.


About the EOS 5DS R

The EOS 5DS R's optical low-pass filter is disabled, and the effect is eliminated to obtain a higher-looking resolution.

Since the optical low-pass filter is for reducing moire and false colors, images taken with the EOS 5DS R may show more moire and false colors than with the EOS 5DS depending on the subject and shooting conditions.

Item Check List

Before starting, check that all the following items are included with your camera. If anything is missing, contact your dealer.



- * Battery Charger LC-E6 or LC-E6E is provided. (The LC-E6E comes with a power cord.)
- The Instruction Manual and CD-ROMs provided are listed on the next page.
- Be careful not to lose any of the above items.

When connecting the camera to a computer or printer, use the provided interface cable or one from Canon. When connecting an interface cable, also use the provided cable protector (p.36).

Instruction Manual and CD-ROMs

The instruction manual consists of a booklet, a leaflet, and electronic manuals (PDF files on the CD-ROM).



Instruction Manual



Quick Reference Guide



Camera Instruction Manual CD-ROM

Contains the following manuals (PDF files):

- Camera Instruction Manual (Detailed version)
- · Quick Reference Guide

Instructions for viewing the Camera Instruction Manual CD-ROM are on pages 516-517.



EOS DIGITAL Solution Disk (Software CD-ROM)

Contains software such as image-editing software and Software Instruction Manuals (PDF files).

For more information and installation procedures of the software, see pages 520-521.

Instructions for viewing the Software Instruction Manual are on page 522.

Compatible Cards

The camera can use the following cards regardless of capacity: If the card is new or was previously formatted (initialized) by another camera or computer, format the card with this camera (p.67).

- CF (CompactFlash) cards
 - * Type I, UDMA mode 7-compatible.
- SD/SDHC*/SDXC* memory cards
 - * UHS-I cards supported.

Cards that Can Record Movies

When shooting movies, use a large-capacity card with a fast reading/writing speed as shown in the table.

Movie Recording Size (p.297)	CF card	SD card	
ALL-I (I-only)	30 MB/sec. or faster	20 MB/sec. or faster	
IPB	10 MB/sec. or faster	6 MB/sec. or faster	

- If you use a slow-writing card when shooting movies, the movie may not be recorded properly. Also, if you play back a movie on a card with a slow reading speed, the movie may not play back properly.
- If you want to shoot still photos while shooting a movie, you will need an even faster card.
- To check the card's reading/writing speed, refer to the card manufacturer's Web site.



In this manual, "CF card" refers to CompactFlash cards and "SD card" refers to SD/SDHC/SDXC cards. "Card" refers to all memory cards used to record images or movies.

* The camera does not come with a card for recording images/ movies. Please purchase it separately.

Quick Start Guide

1





Insert the battery (p.42).

To charge the battery, see page 40.

2





Insert the card (p.43).

- The camera-front side slot is for a CF card, and the camera-back side slot is for an SD card.
- * Shooting is possible with either a CF card or an SD card in the camera.

3



Attach the lens (p.52).

Align it with the red dot.

4



Set the lens's focus mode switch to <AF> (p.52).

5



Set the power switch to $\langle ON \rangle$ (p.47).





While holding down the center of the Mode Dial, set it to $\langle \triangle^{\dagger} \rangle$ (Scene Intelligent Auto) (p.33).

 All the necessary camera settings will be set automatically.





Focus on the subject (p.55).

- Look through the viewfinder and aim the viewfinder center over the subject.
- Press the shutter button halfway, and the camera will focus on the subject.





Take the picture (p.55).

 Press the shutter button completely to take the picture.





Review the picture.

- The image just captured will be displayed for 2 sec. on the LCD monitor
- To display the image again, press the <►> button (p.320).
- To shoot while looking at the LCD monitor, see "Live View Shooting" (p.255).
- To view the images captured so far, see "Image Playback" (p.320).
- To delete an image, see "Erasing Images" (p.358).

Conventions Used in this Manual

Icons in this Manual

<>> : Indicates the Main Dial.

< ○> : Indicates the Quick Control Dial. < ├> : Indicates the Multi-controller. < ⓒ> : Indicates the Setting button.

⊕4/⊕6/⊕8/⊕10/⊕16: Indicates that each function remains active for

4 sec., 6 sec., 8 sec., 10 sec., or 16 sec. after

you let go of the button.

* In this manual, the icons and markings indicating the camera's buttons, dials, and settings correspond to the icons and markings on the camera and on the LCD monitor.

MENU: Indicates a function that can be changed by pressing the

<MENU> button to change its settings.

★ : When shown on the upper right of a page, it indicates that
the function is available only in the <P>, <Ty>, <Ay>.

<**M**>, or <**B**> mode.

(p.**) : Reference page numbers for more information.

: Warning to prevent shooting problems.

: Supplemental information.

: Tips or advice for better shooting.

? : Troubleshooting advice.

Basic Assumptions

- All operations explained in this manual assume that the power switch is set to <ON> and the <LOCK►> switch is set to the left (Multi function lock released) (p.47, 59).
- It is assumed that all the menu settings, Custom Functions, etc. are set to their defaults.
- The illustrations in this manual show the EOS 5DS attached with the EF50mm f/1.4 USM lens as an example.

Chapters

For first-time DSLR users, Chapters 1 and 2 explain the camera's basic operations and shooting procedures.

	Introduction	2
1	Getting Started	39
2	Basic Shooting	79
3	Setting the AF and Drive Modes	85
4	Image Settings	145
5	Advanced Operations	203
6	Flash Photography	243
7	Shooting with the LCD Monitor (Live View Shooting)	255
8	Shooting Movies	279
9	Image Playback	319
10	Post-Processing Images	363
11	Sensor Cleaning	373
12	Printing Images and Transferring Images to a Computer	379
13	Customizing the Camera	399
14	Reference	441
15	Viewing the CD-ROM Instruction Manuals /	515

Contents

	Introduction	2
	Item Check List	3
	Instruction Manual and CD-ROMs	4
	Compatible Cards	5
	Quick Start Guide	6
	Conventions Used in this Manual	8
	Chapters	9
	Index to Features	. 17
	Safety Precautions	. 20
	Handling Precautions	. 23
	Nomenclature	. 26
1	Getting Started	39
	Charging the Battery	. 40
	Installing and Removing the Battery	. 42
	Installing and Removing the Card	. 43
	Turning on the Power	. 47
	Setting the Date, Time, and Zone	. 49
	Selecting the Interface Language	. 51
	Attaching and Detaching a Lens	. 52
	Basic Operation	. 54
	Q Quick Control for Shooting Functions	. 61
	MENU Operations	. 64
	Before You Start	. 67
	Formatting the Card	. 67
	Disabling the Beeper	. 69
	Setting the Power-off Time/Auto Power Off	. 69
	Setting the Image Review Time	
	Reverting the Camera to the Default Settings	. 70

	## Displaying the Grid	/4
	- Displaying the Electronic Level	75
	Setting the Viewfinder Information Display	77
	? Help	78
2	Basic Shooting	79
	Fully Automatic Shooting (Scene Intelligent Auto)	80
	A Full Auto Techniques (Scene Intelligent Auto)	83
3	Setting the AF and Drive Modes	85
	AF: Selecting the AF Operation	86
	⊞ Selecting the AF Area and AF Point	90
	AF Area Selection Modes	95
	AF Sensor	99
	Lenses and Usable AF Points	100
	Selecting AI Servo AF Characteristics	109
	Customizing AF Functions	118
	Fine Adjustment of AF's Point of Focus	134
	When Autofocus Fails	140
	MF: Manual Focus	141
	□н Selecting the Drive Mode	142
	᠔ Using the Self-timer	144
4	Image Settings	145
	Selecting the Card for Recording and Playback	146
	Setting the Image-Recording Quality	149
	Setting Crop/aspect ratio	154
	ISO: Setting the ISO Speed	158
	Selecting a Picture Style	164
	Customizing a Picture Style	168

	Registering a Picture Style	1/2
	WB: Setting the White Balance	174
	Custom White Balance	176
	K Setting the Color Temperature	178
	₩ White Balance Correction	179
	Auto Correction of Brightness and Contrast	182
	Setting Noise Reduction	183
	Highlight Tone Priority	187
	Correction of Lens Peripheral Illumination and Aberrations	188
	Reducing Flicker	191
	Setting the Color Space	193
	Creating and Selecting a Folder	194
	Changing the File Name	196
	File Numbering Methods	199
	Setting Copyright Information	201
	Setting Copyright information	201
5	,,,,	203
5	Advanced Operations	203
5	Advanced Operations P: Program AE	203
5	Advanced Operations P: Program AE Tv: Shutter-Priority AE	203 204 206
5	Advanced Operations P: Program AE Tv: Shutter-Priority AE Av: Aperture-Priority AE	203 204 206 208
5	Advanced Operations P: Program AE Tv: Shutter-Priority AE	203 204 206 208 209
5	Advanced Operations P: Program AE Tv: Shutter-Priority AE Av: Aperture-Priority AE Depth-of-Field Preview M: Manual Exposure	203 204 206 208 209 210
5	Advanced Operations P: Program AE	203 204 206 208 209 210
5	Advanced Operations P: Program AE	203 204 206 208 209 210 212
5	Advanced Operations P: Program AE	203 204 206 208 209 210 212 214
5	Advanced Operations P: Program AE	203 204 206 208 219 212 214 215
5	Advanced Operations P: Program AE	203 204 206 208 219 212 214 215 217
5	Advanced Operations P: Program AE	203 204 206 208 210 212 214 215 217 218

	Using the Eyepiece Cover	236
		237
	Remote Control Shooting	237
	□■□■ Interval Timer Shooting	239
6	Flash Photography	243
	Flash Photography	244
	Setting the Flash	247
7	Shooting with the LCD Monitor (Live View Shooting)	255
	☐ Shooting with the LCD Monitor	256
	Shooting Function Settings	262
	Menu Function Settings	264
	Using AF to Focus (AF Method)	268
	MF: Focusing Manually	275
8	Shooting Movies	279
	₹ Shooting Movies	280
	Autoexposure Shooting	280
	Shutter-priority AE	281
	Aperture-priority AE	282
	Manual Exposure Shooting	286
	Shooting Still Photos	293
	Shooting Function Settings	295
	Setting the Movie Recording Size	297
	Octuing the Movie Necolating Size	
	Setting the Sound Recording	
		300
	Setting the Sound Recording	300 302
	Setting the Sound Recording	300 302 303

9	Image Playback	319
	▶ Image Playback	320
	INFO.: Shooting Information Display	322
	► Searching for Images Quickly	327
	Display Multiple Images on One Screen (Index Display)	327
	☐ Jump through Images (Jump Display)	328
	Q Magnifying Images	330
	☐ Comparing Images (Two-Image Display)	332
	Rotating the Image	333
		334
	Setting Ratings	337
	Q Quick Control for Playback	340
	😾 Enjoying Movies	342
	► Playing Back Movies	344
	★ Editing a Movie's First and Last Scenes	346
	Slide Show (Auto Playback)	348
	Viewing Images on a TV Set	351
	Copying Images	354
		358
	Changing Image Playback Settings	361
	Adjusting the LCD Monitor Brightness	361
	Auto Rotation of Vertical Images	362
10	Post-Processing Images	363
	RAW Processing RAW Images with the Camera	364
	☐ Resizing JPEG Images	369
	4 Cropping JPEG Images	371

11	Sensor Cleaning	373
	.the Automatic Sensor Cleaning	374
	Appending Dust Delete Data	375
	Manual Sensor Cleaning	377
12	Printing Images and Transferring Images to a Computer	379
	Preparing to Print	380
	Printing	382
	Digital Print Order Format (DPOF)	389
	▶ Direct Printing of Print-Ordered Images	392
	□ Transferring Images to a Computer	393
	Specifying Images for a Photobook	397
	= -p/33	001
13	Customizing the Camera	399
13		399
13	Customizing the Camera	399 400
13	Customizing the Camera Custom Functions	399 400 402
13	Customizing the Camera Custom Functions Setting Custom Functions	399 400 402
13	Customizing the Camera Custom Functions	399 400 402 402 408
13	Customizing the Camera Custom Functions Setting Custom Functions C.Fn1: Exposure C.Fn2: Exposure	399 400 402 402 408 409
13	Customizing the Camera Custom Functions Setting Custom Functions C.Fn1: Exposure C.Fn2: Exposure C.Fn3: Others	399 400 402 402 408 409
13	Customizing the Camera Custom Functions Setting Custom Functions C.Fn1: Exposure C.Fn2: Exposure C.Fn3: Others	399 400 402 402 408 409 413

14	Reference	441
	INFO. Button Functions	442
	Checking the Battery Information	446
	Using a Household Power Outlet	450
		451
	System Map	454
	Function Availability Table According to Shooting Mode	456
	Menu Settings	460
	Troubleshooting Guide	471
	Error Codes	487
	Specifications	488
15	Viewing the CD-ROM Instruction Manuals /	
	Downloading Images to Your Computer	515
	Viewing the Camera Instruction Manual CD-ROM	516
	Downloading Images to a Computer	518
	Software Overview	520
	Installing the Software	521
	Software Instruction Manual	522
	Index	523

Index to Features

Power		LCD Monitor	
Charging the battery	→ p.40	Brightness adjustment	→ p.361
Battery level	→ p.48	Electronic level	→ p.75
Battery information		Help	→ p.78
check	→ p.446	AF	
Household power outlet	•	AF operation	→ p.86
Auto power off	→ p.69	 AF area selection mode 	→ p.90
Card		 AF point selection 	→ p.93
Formatting	→ p.67	 AF point registration 	→ p.418
Recording function	→ p.146	Lens group	→ p.100
Selecting card	→ p.148	AF points lighting up	
Release shutter without		in red	→ p.132
card	→ p.44	Al Servo AF	
Lens		characteristics	→ p.109
Attaching	→ p.52	 AF Custom Functions 	→ p.118
Basic Settings		AF Microadjustment	→ p.134
Language	→ p.51	 Focusing manually 	→ p.141
Date/Time/Zone	→ p.49	Metering	
• Beeper	→ p.69	Metering mode	→ p.212
 Copyright information 	→ p.201	Drive	
Clear all camera settings	→ p.70	Drive mode	→ p.142
Viewfinder		Self-timer	→ p.144
Dioptric adjustment	→ p.54	Maximum burst	→ p.153
Eyepiece cover	→ p.236	Recording Images	
• Grid display	→ p.74	 Recording function 	→ p.146
Electronic level	→ p.76	 Creating/Selecting 	
Show/hide in viewfinder	•	a folder	→ p.194
	- h	File name	→ p.196
		File numbering	→ p.199

Image Quality		Exposure	
Image-recording quality	→ p.149	Exposure compensation	→ p.214
Crop/aspect ratio	→ p.154	• Exposure compensation	
ISO speed	→ p.158	with M+Auto ISO	→ p.211
Picture Style	→ p.164	• AEB	→ p.215
White balance	→ p.174	AE lock	→ p.217
Auto Lighting Optimizer	→ p.182	Safety shift	→ p.405
Noise reduction for		Flash	
high ISO speeds	→ p.183	External Speedlite	→ p.244
 Noise reduction for long exposures 	→ p.185	• Flash exposure compensation	→ p.244
 Highlight tone priority 	→ p.187	• FE lock	→ p.244
Lens aberration correctionAnti-flicker	⇒ p.188⇒ p.191	 Flash function settings Flash Custom Function settings 	→ p.247 → p.253
Color space	→ p.193	Live View Shooting	
Shooting		Live View shooting	→ p.255
Shooting mode	→ p.33	AF method	→ p.268
• HDR	→ p.221	Continuous AF	→ p.264
 Multiple exposures 	→ p.226	• Focusing manually	→ p.275
Mirror lockup	→ p.234	Crop/aspect ratio	→ p.262
Bulb timer	→ p.219	Silent LV shooting	→ p.266
Interval timer	→ p.239	- Cheffic Lt Shooting	ν p.200
 Depth-of-field preview 	→ p.209		

→ p.237

→ p.61

Remote control

Quick Control

Movie Shooting		Image Editing	
Movie shooting	→ p.279	RAW image processing	→ p.364
AF method	→ p.268	Resizing JPEGs	→ p.369
Movie Servo AF	→ p.313	Cropping JPEGs	→ p.371
Movie recording quality	→ p.297	Printing and Transferri	ng
Sound recording	→ p.300	Images	
Time code	→ p.303	PictBridge	→ p.379
Time-lapse movie	→ p.306	Print Order (DPOF)	→ p.389
Still photo shooting	→ p.293	Image transfer	→ p.393
Playback		Photobook Set-up	→ p.397
Image review time	→ p.70	Customization	
Single-image display	→ p.320	• Custom Functions (C.Fn)	→ p.400
Shooting information	→ p.322	Custom Controls	→ p.413
Index display	→ p.327	Custom Quick Control	→ p.427
Image browsing		My Menu	→ p.432
(Jump display)	→ p.328	 Custom shooting mode 	→ p.437
Magnified view	→ p.330	Sensor Cleaning and D	ust
Two-image display	→ p.332	Reduction	
Image rotation	→ p.333	 Sensor cleaning 	→ p.374
Protect	→ p.334	Append Dust Delete Data	•
Rating	→ p.337	Interface	•
Movie playback	→ p.344		> = 26
Slide show	→ p.348	Cable protector	→ p.36
Viewing images on a		Software	
TV set	→ p.351	Overview	→ p.520
Copying	→ p.354	Installation	→ p.521
Erasing	→ p.358		
Quick Control	→ p.340		

Safety Precautions

The following precautions are provided to prevent harm or injury to yourself and others. Make sure to thoroughly understand and follow these precautions before using the product.

If you experience any malfunctions, problems, or damage to the product, contact the nearest Canon Service Center or the dealer from whom you purchased the product.



Warnings: Follow the warnings below. Otherwise, death or serious injuries may result.

- To prevent fire, excessive heat, chemical leakage, explosions, and electrical shock, follow the safeguards below:
 - Do not use any batteries, power sources, or accessories not specified in the Instruction Manual. Do not use any home-made or modified batteries.
 - Do not short-circuit, disassemble, or modify the battery. Do not apply heat or solder to the battery. Do not expose the battery to fire or water. Do not subject the battery to strong physical shock.
 - · Do not insert the battery's plus and minus ends incorrectly.
 - Do not recharge the battery in temperatures outside the allowable charging (working) temperature range. Also, do not exceed the recharging time indicated in the Instruction Manual.
 - Do not insert any foreign metallic objects into the electrical contacts of the camera, accessories, connecting cables, etc.
- When disposing of a battery, insulate the electrical contacts with tape to prevent contact with other metallic objects or batteries. This is to prevent a fire or an explosion.
- If excessive heat, smoke, or fumes are emitted when recharging the battery, immediately unplug the battery charger from the power outlet to stop recharging.
 Otherwise, it may cause a fire, heat damage, or electrical shock.
- If the battery leaks, changes color, deforms, or emits smoke or fumes, remove it immediately. Be careful not to get burned in the process. It may cause a fire, electrical shock or skin burn if you keep using it.
- Prevent any battery leakage from contacting your eyes, skin, and clothing. It can cause blindness or skin problems. If the battery leakage contacts your eyes, skin, or clothing, flush the affected area with lots of clean water without rubbing it. See a physician immediately.
- Do not leave any cords near a heat source. It can deform the cord or melt the insulation and cause a fire or electrical shock.
- Do not hold the camera in the same position for long periods of time. Even if the
 camera does not feel too hot, prolonged contact with the same body part may cause
 skin redness, blistering or low-temperature contact burns. Using a tripod is
 recommended for people with circulation problems or very sensitive skin, or when
 using the camera in very hot places.
- Do not fire the flash at anyone driving a car or other vehicle. It may cause an accident.
- Do not fire the flash near a person's eyes. It may impair the person's vision. When using flash to photograph an infant, keep at least 1 meter/3.3 feet away.

- When the camera or accessories are not in use, make sure to remove the battery and disconnect the power plug from the equipment before storing. This is to prevent electrical shock, excessive heat, fire, or corrosion.
- Do not use the equipment where there is flammable gas. This is to prevent an
 explosion or a fire.
- If you drop the equipment and the casing breaks open to expose the internal parts, do not touch the internal parts. There is a possibility of an electrical shock.
- Do not disassemble or modify the equipment. High-voltage internal parts can cause electrical shock.
- Do not look at the sun or an extremely bright light source through the camera or lens. Doing so may damage your vision.
- Keep equipment out of the reach of children and infants, including when in use. Straps
 or cords may accidentally cause choking, electrical shock, or injury. Choking or injury
 may also occur if a child or infant accidentally swallows a camera part or accessory. If
 a child or infant swallows a part or accessory, consult a physician immediately.
- Do not use or store the equipment in dusty or humid places. Likewise, store the battery with its protective cover attached to prevent short-circuit. This is to prevent a fire, excessive heat, electrical shock, or burn.
- Before using the camera inside an airplane or hospital, check if it is allowed.
 Electromagnetic waves emitted by the camera may interfere with the plane's instruments or the hospital's medical equipment.
- To prevent a fire and electrical shock, follow the safeguards below:
 - · Always insert the power plug all the way in.
 - Do not handle a power plug with wet hands.
 - When unplugging a power plug, grasp and pull the plug instead of the cord.
 - Do not scratch, cut, or excessively bend the cord or put a heavy object on the cord. Also do not twist or tie the cords.
- · Do not connect too many power plugs to the same power outlet.
- Do not use a cord whose wire is broken or insulation is damaged.
- Unplug the power plug periodically and clean off the dust around the power outlet with a dry cloth. If the surrounding is dusty, humid, or oily, the dust on the power outlet may become moist and short-circuit the outlet, causing a fire.
- Do not connect the battery directly to an electrical outlet or a car's cigarette lighter outlet. The battery may leak, generate excessive heat or explode, causing a fire, burns or injuries.
- A thorough explanation of how to use the product by an adult is required when the product is used by children. Supervise children while they are using the product. Incorrect usage may result in electrical shock or injury.
- Do not leave a lens or lens-attached camera in the sun without the lens cap attached. Otherwise, the lens may concentrate the sun's rays and cause a fire.
- Do not cover or wrap the product with a cloth. Doing so may trap heat within and cause the casing to deform or catch fire.
- Be careful not to get the camera wet. If you drop the product in the water or if water or metal get inside the product, promptly remove the battery. This is to prevent a fire and an electrical shock.
- Do not use paint thinner, benzene, or other organic solvents to clean the product.
 Doing so may cause fire or a health hazard.



Cautions:

Follow the cautions below. Otherwise, physical injury or property damage may result.

- Do not use or store the product inside a car under the hot sun or near a heat source.
 The product may become hot and cause skin burns. Doing so may also cause battery leakage or explosion, which will degrade the performance or shorten the life of the product.
- Do not carry the camera around when it is attached to a tripod. Doing so may cause injury. Also make sure the tripod is sturdy enough to support the camera and lens.
- Do not leave the product in a low-temperature environment for an extended period of time. The product will become cold and may cause injury when touched.
- Never play the provided CD-ROM in a drive that is not compatible with the CD-ROM.
 If you use it in a music CD player, you may damage the speakers and other components. When using headphones, there is also a risk of injury to your ears from excessively loud volume.

Handling Precautions

Camera Care

- This camera is a precision instrument. Do not drop it or subject it to physical shock.
- The camera is not waterproof and cannot be used underwater. If you accidentally drop the camera into water, promptly consult the nearest Canon Service Center. Wipe off any water droplets with a dry and clean cloth. If the camera has been exposed to salty air, wipe it with a well-wrung wet cloth.
- Never leave the camera near anything having a strong magnetic field such as a magnet or electric motor. Also avoid using or leaving the camera near anything emitting strong radio waves, such as a large antenna. Strong magnetic fields can cause camera misoperation or destroy image data.
- Do not leave the camera in excessive heat, such as in a car in direct sunlight. High temperatures can cause the camera to malfunction.
- The camera contains precision electronic circuitry. Never attempt to disassemble the camera yourself.
- Do not block the mirror operation with your finger, etc. Doing so may cause a malfunction.
- Use a blower to blow away dust on the lens, viewfinder, reflex mirror, and focusing screen. Do not use cleaners that contain organic solvents to clean the camera body or lens. For stubborn dirt, take the camera to the nearest Canon Service Center.
- Do not touch the camera's electrical contacts with your fingers. This is to prevent the contacts from corroding. Corroded contacts can cause camera misoperation.
- If the camera is suddenly brought in from the cold into a warm room, condensation may form on the camera and internal parts. To prevent condensation, first put the camera in a sealed plastic bag and let it adjust to the warmer temperature before taking it out of the bag.

- If condensation forms on the camera, do not use the camera. This is to avoid damaging the camera. If there is condensation, remove the lens, card and battery from the camera, and wait until condensation has evaporated before using the camera.
- If the camera will not be used for an extended period, remove the battery and store the camera in a cool, dry, well-ventilated location. Even while the camera is in storage, press the shutter button a few times once in a while to check that the camera is still working.
- Avoid storing the camera where there are chemicals that result in rust and corrosion such as in a chemical lab.
- If the camera has not been used for an extended period, test all its functions before using it. If you have not used the camera for some time or if there is an important shoot such as a foreign trip coming up, have the camera checked by your nearest Canon Service Center or check the camera yourself and make sure it is working properly.
- If you use continuous shooting, Live View shooting, or movie shooting for a prolonged period, the camera may become hot. This is not a malfunction.
- If there is a bright light source inside or outside the image area, ghosting may occur.

LCD Panel and LCD Monitor

- Although the LCD monitor is manufactured with very high precision technology with over 99.99% effective pixels, there may be a few dead pixels displaying only black or red, etc. among the remaining 0.01% or less pixels.
 Dead pixels are not a malfunction. They do not affect the images recorded.
- If the LCD monitor is left on for a prolonged period, screen burn-in may occur where you see remnants of what was displayed. However, this is only temporary and will disappear when the camera is left unused for a few days.
- The LCD monitor display may seem slow in low temperatures, or look black in high temperatures. It will return to normal at room temperature.

Cards

To protect the card and its recorded data, note the following:


- Do not drop, bend, or wet the card. Do not subject it to excessive force, physical shock, or vibration.
- Do not touch the card's electronic contacts with your fingers or anything metallic
- Do not affix any stickers, etc., on the card.
- Do not store or use the card near anything that has a strong magnetic field, such as a TV set, speakers, or magnet. Also avoid places prone to having static electricity.
- Do not leave the card in direct sunlight or near a heat source.
- Store the card in a case.
- Do not store the card in hot, dusty, or humid locations.


Lens

After detaching the lens from the camera, put down the lens with the rear end up and attach the rear lens cap to avoid scratching the lens surface and electrical contacts.




Nomenclature

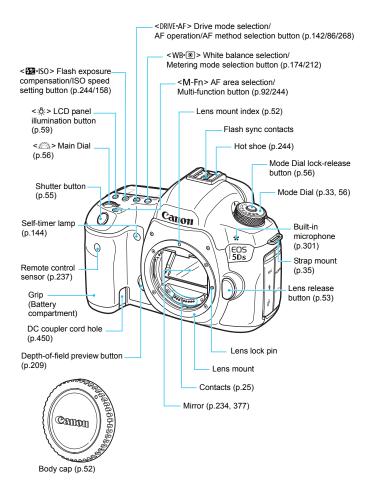


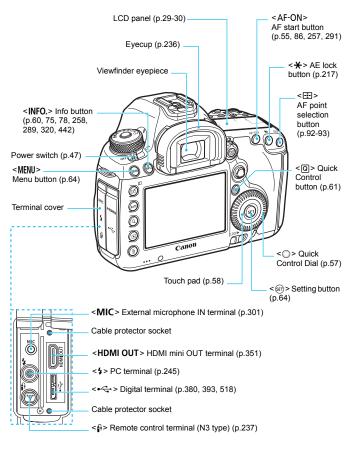


When connecting the interface cable to a digital terminal, you must use the provided cable protector (p.36).

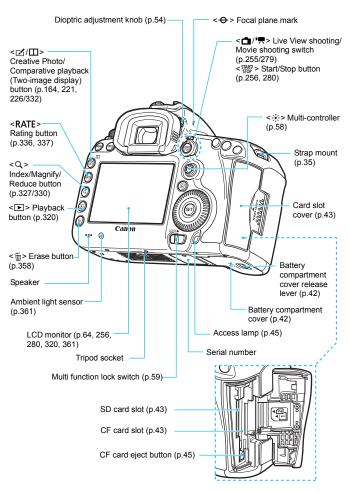


LCD Panel

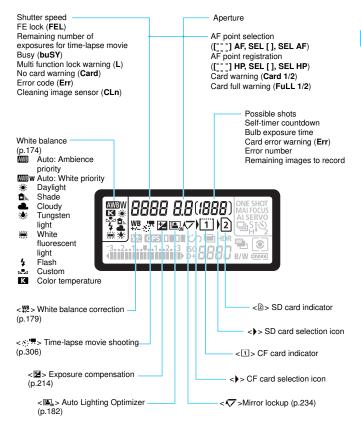


^{*} The display will show only the settings currently applied.

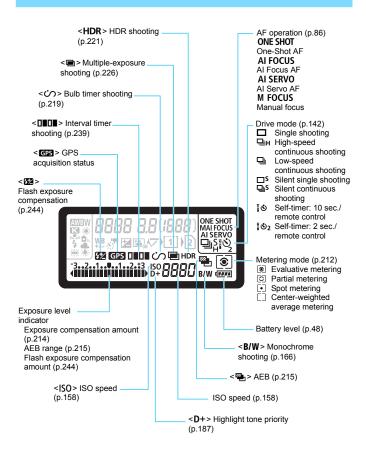

Viewfinder Information




^{*} The display will show only the settings currently applied.

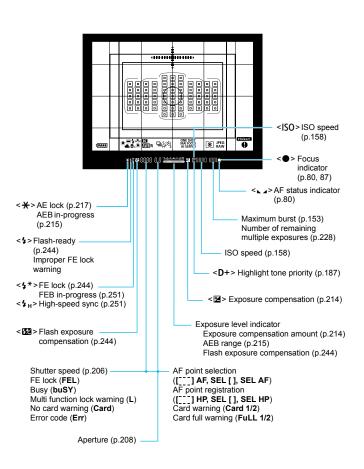

Mode Dial

You can set the shooting mode. Turn the Mode Dial while holding down the Mode Dial center (Mode Dial lock release button).




Custom shooting mode

You can register the shooting mode (**P/Tv/Av/M/B**), AF operation, menu settings, etc., to **(1)**, **(2)**, **(3)** Mode Dial positions (p.437).

Battery Charger LC-E6

Charger for Battery Pack LP-E6N/LP-E6 (p.40).




IMPORTANT SAFETY INSTRUCTIONS-SAVE THESE INSTRUCTIONS. DANGER-TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, CAREFULLY FOLLOW THESE INSTRUCTIONS.

For connection to a supply not in the U.S.A., use an attachment plug adapter of the proper configuration for the power outlet, if needed.

Battery Charger LC-E6E

Charger for Battery Pack LP-E6N/LP-E6 (p.40).




Attaching the Strap



Pass the end of the strap through the camera's strap mount eyelet from the bottom. Then pass it through the strap's buckle as shown in the illustration. Pull the strap to take up any slack and make sure the strap will not loosen from the buckle.

The eyepiece cover is also attached to the strap (p.236).





Using the Cable Protector

When connecting the camera to a computer, printer, Wireless File Transmitter or GPS Receiver, use the provided interface cable or one from Canon (shown in the System Map on page 454).


When connecting the interface cable, also <u>use the provided cable protector</u>. Using the cable protector prevents the cable from accidental disconnection and the terminal from getting damaged.


Using the Provided Interface Cable and a Genuine HDMI Cable (sold separately)






Cable protector





Provided interface cable



HDMI cable (sold separately)

Using a Genuine Interface Cable (sold separately)



If you use a genuine interface cable (sold separately, p.454), run the cable through the clamp before attaching the clamp to the cable protector.



- Connecting interface cable without using the cable protector may damage the digital terminal.
- Do not use a USB 2.0 cable equipped with a Micro-B plug. It may damage the camera's digital terminal.
- As shown in the lower-right illustration for step 4, check that the interface cable is securely attached to the digital terminal.



To connect the camera to a TV set, using HDMI Cable HTC-100 (sold separately) is recommended. Using the cable protector is recommended even when connecting an HDMI cable.

MEMO		

1

Getting Started

This chapter explains preparatory steps before you start shooting and basic camera operations.

Charging the Battery



Remove the protective cover.


 Detach the protective cover provided with the battery.



Attach the battery.

- As shown in the illustration, attach the battery securely to the charger.
- To detach the battery, follow the above procedure in reverse.






Recharge the battery. For I C-F6

 As shown by the arrow, flip out the battery charger's prongs and insert the prongs into a power outlet.

LC-E6E



For LC-E6E

- Connect the power cord to the charger and insert the plug into a power outlet.
- Recharging starts automatically and the charge lamp blinks in orange.

Charge Level	Charge Lamp	
Ollarge Level	Color	Display
0-49%		Blinks once per second
50-74%	Orange	Blinks twice per second
75% or higher		Blinks three times per second
Fully charged	Green	Lights up

- It takes approx. 2 hr. and 30 min. to fully recharge a completely exhausted battery at room temperature (23°C / 73°F). The time required to recharge the battery will vary greatly depending on the ambient temperature and the battery's remaining capacity.
- For safety reasons, recharging in low temperatures (5°C 10°C / 41°F - 50°F) will take longer (up to approx. 4 hr.).

Tips for Using the Battery and Charger

- Upon purchase, the battery is not fully charged. Charge the battery before use.
- Recharge the battery on the day before or on the day it is to be used. Even during storage, a charged battery will gradually drain and lose its capacity.
- After recharging the battery, detach it and disconnect the charger from the power outlet.
- You can attach the cover in a different orientation to indicate whether the battery has been recharged or not. If the battery has been recharged, attach the cover so that the battery-shaped hole < -> is aligned over the blue sticker on the battery. If the battery is exhausted, attach the cover in the opposite orientation.




- When not using the camera, remove the battery. If the battery is left in the camera for a prolonged period, a small amount of power current is released, resulting in excess discharge and shorter battery life. Store the battery with the protective cover attached. Storing the battery when it is fully charged may lower the battery's performance.
- The battery charger can also be used in foreign countries. The battery charger is compatible with a 100 V AC to 240 V AC 50/60 Hz power source. If necessary, attach a commercially-available plug adapter for the respective country or region. Do not attach any portable voltage transformer to the battery charger. Doing so can damage the battery charger.
- If the battery becomes exhausted quickly even after being fully charged, the battery has reached the end of its service life. Check the battery's recharge performance (p.446) and purchase a new battery.
- After disconnecting the charger's power plug, do not touch the prongs for approx. 10 sec.
- If the battery's remaining capacity (p.446) is 94% or higher, the battery will not be recharged.
- The charger cannot charge any battery other than Battery Pack LP-E6N/LP-E6.

Installing and Removing the Battery


Load a fully-charged Battery Pack LP-E6N (or LP-E6) into the camera. The camera's viewfinder becomes bright when a battery is installed, and darkens when the battery is removed.

Installing the Battery





 Slide the lever as shown by the arrows and open the cover.



) Insert the battery.

- Insert the end with the battery contacts.
- Insert the battery until it locks in place.



Close the cover.

Press the cover until it snaps shut.



Only Battery Pack LP-E6N/LP-E6 can be used.

Removing the Battery



Open the cover and remove the battery.

- Press the battery lock lever as shown by the arrow and remove the battery.
- To prevent short circuiting of the battery contacts, be sure to attach the provided protective cover (p.40) to the battery.

Installing and Removing the Card

The camera can use a CF card and an SD card. Images can be recorded when at least one card is installed in the camera.


If both types of card are inserted, you can select which card to record images to, or simultaneously record images on both cards (p.146-148).



Cautions for Using an SD Card

If you use an SD card, be sure the card's write-protect switch is set upward to enable writing/erasing.

Installing the Card




Open the cover.

Slide the cover as shown by the arrows to open it.

CF card




SD card



Write-protect switch

Insert the card.

- The camera-front side slot is for a CF card. and the camera-back side slot is for an SD card.
- Face the CF card's label toward you and insert the end with the small holes into the camera. If the card is inserted in the wrong way, it may damage the camera.
- The CF card eject button will stick out.
- With the SD card's label facing you, push in the card until it clicks in place.



Card Possible selection icon shots



CF card indicator

SD card indicator

Close the cover.

- Close the cover and slide it in the direction shown by the arrows until it snaps shut.
- When you set the power switch to <**ON**> (p.47), the number of possible shots and the loaded card(s) will be displayed on the LCD panel.

The images will be recorded to the card indicated by the arrow <) > icon.




- The camera cannot use Type II CF cards, hard disk-type cards, or CFast cards.
- Multimedia cards (MMC) cannot be used (card error will be displayed).




- Ultra DMA (UDMA) CF cards can also be used with the camera. UDMA cards enable faster data writing.
- SD/SDHC/SDXC memory cards are supported. UHS-I SDHC or SDXC memory cards can also be used.
- The number of possible shots depends on the remaining capacity of the card, image-recording quality, ISO speed, etc.
- "Possible Shots" displays the number of shots based on the [4: Crop/aspect ratio] setting (p.154).
- Even if shooting 2,000 or more shots is possible, the indicator will display only up to 1999.
- Setting [n: Release shutter without card] to [Disable] will prevent you from forgetting to insert a card (p.460).

Removing the Card



Access lamp



CF card eject button

Open the cover.

- Set the power switch to < OFF >.
- Make sure the access lamp is off, then open the cover.
- If [Recording...] is displayed on the LCD monitor, close the cover.

Remove the card.

- To remove the CF card, push the eject button.
- To remove the SD card, push it in gently and release it. Then pull it out.
- Pull the card straight out, then close the cover.



- When the access lamp is lit or blinking, it indicates that images are being written to, read from, or erased from the card, or data is being transferred. Do not open the card slot cover during this time. Also, never do any of the following while the access lamp is lit or blinking. Otherwise, it can damage the image data, card, or camera.
 - Removing the card.Removing the battery.
 - Shaking or banging the camera around.
 - Unplugging and connecting a power cord (when an AC adapter kit is used).
- If the card already contains recorded images, the image number may not start from 0001 (p.199).
- If a card-related error message is displayed on the LCD monitor, remove and reinsert the card. If the error persists, use a different card. If you can transfer all the images on the card to a computer, transfer all the images and then format the card with the camera (p.67). The card may then return to normal.
- Do not touch the SD card's contacts with your fingers or metal objects.
 Do not expose the contacts to dust or water. If smudges adhere to the contacts, contact failure may result.

Turning on the Power

If you turn on the power switch and the date/time/zone setting screen appears, see page 49 to set the date/time/zone.



<NN> : The camera turns on.

<OFF>: The camera is turned off and does not operate. Set to this position when not using the camera

Automatic Sensor Cleaning



- Whenever you set the power switch to <ON> or <OFF>. sensor cleaning will be executed automatically. (A small sound may be heard.) During the sensor cleaning, the LCD monitor will display < \times.
- You can still shoot during sensor cleaning by pressing the shutter button halfway (p.55) to stop cleaning and take a picture.
- If you repeatedly turn the power switch <ON>/<OFF> at a short interval, the < to> icon may not be displayed. This is normal and not a malfunction

MENU Auto Power Off

- To save battery power, the camera turns off automatically after 1 minute of non-operation. To turn on the camera again, just press the shutter button halfway.
- You can change the auto power off time with [\$\psi_2\$: Auto power off] (p.69).



If you set the power switch to **OFF**> while an image is being recorded to the card, [Recording...] will be displayed and the power will turn off after the recording finishes.

Battery Level Indicator

When the power switch is set to **ON**>, the battery level will be indicated in one of six levels. A blinking battery icon **< \(\subseteq \)** indicates that the battery will be exhausted soon.

(#))[399) 1] 2	ONE SHOT
ISO	Я	(IIII)

Display	(T#FA				-	
Level (%)	100 - 70	69 - 50	49 - 20	19 - 10	9 - 1	0

Number of Possible Shots

(Approx. number of shots)

Temperature	Room Temperature (23°C / 73°F)	Low Temperatures (0°C / 32°F)
Possible shots	700	660

- The figures above are based on a fully-charged Battery Pack LP-E6N, no Live View shooting, and CIPA (Camera & Imaging Products Association) testing standards.
- Possible shots with Battery Grip BG-E11 (sold separately)
 - With LP-E6N x 2: approx. twice the shots without the battery grip.
 - With AA/LR6 alkaline batteries at room temperature (23°C / 73°F): approx.
 140 shots.



- Doing any of the following will exhaust the battery sooner:
 - · Pressing the shutter button halfway for a prolonged period.
 - Activating the AF frequently without taking a picture.
 - · Using the lens Image Stabilizer.
 - · Using the LCD monitor frequently.
- The number of possible shots may decrease depending on the actual shooting conditions.
- The lens operation is powered by the camera's battery. Depending on the lens used, the battery may exhaust faster.
- For the number of possible shots with Live View shooting, see page 257.
- See [¥3: Battery info.] to check the battery's condition (p.446).
- With Battery Grip BG-E11 (sold separately) loaded with AA/R6 batteries, a four-level indicator will be displayed. (will not be displayed.)

MENU Setting the Date, Time, and Zone

When you turn on the power for the first time or if the date/time/zone are reset, the date/time/zone setting screen will appear. Follow the steps below, making sure to set the time zone first. Set the camera to the time zone in which you currently live so that, when you travel, you can simply change the setting to the correct time zone for your destination and the camera will automatically adjust the date/time.

Note that the date/time appended to recorded images will be based on this date/time setting. Be sure to set the correct date/time.



Display the menu screen.

 Press the < MENU> button to display the menu screen.



Under the [2] tab, select [Date/ Time/Zone].

- Press the <Q> button and select the [♠] tab.
- Turn the < ☆ > dial to select the [¥2] tab.
- Turn the < >> dial to select [Date/ Time/Zone], then press < (si) >.



Set the time zone.

- [London] is set by default.
 - Turn the <>> dial to select [Time zone].
 - Press <(sī) > so < □, > is displayed.
 - Turn the < >> dial to select the time zone, then press < (\$\varepsilon 1)>.









Set the date and time.

- Turn the <>> dial to select the number.
- Press <(€) > so < □ > is displayed.
- Turn the <
 > dial to select the desired setting, then press <
 (Returns to <□>).

Set the daylight saving time.

- Set it if necessarv.
- Turn the <⊕> dial to select [※].
- Press <
 □
 < >
 □

 so <
 □

 is displayed.
- Turn the <<p>> dial to select [★], then press <<p>(€F)>.
- When the daylight saving time is set to [※], the time set in step 4 will advance by 1 hr. If [※] is set, the daylight saving time will be canceled and the time will go back by 1 hr.

Exit the setting.

- Turn the <>> dial to select [OK], then press <
- The date/time/zone and daylight saving time will be set and the menu will reappear.



- The date/time/zone settings may be reset when the camera is stored without the battery, when its battery becomes exhausted, or when it is exposed to below freezing temperatures for a prolonged period. If this happens, set the date/time/zone again.
- After changing the time zone, check that the correct date/time are set.
- When performing [Sync time between cameras] via Wireless File Transmitter, using another EOS 5DS/EOS 5DS R is recommended. If you perform [Sync time between cameras] using different models, the time zone or time may not be set correctly.



- The date/time that were set will start from when you select [OK] in step 6.
- In step 3, the time displayed on the upper right of the screen is the time difference compared with Coordinated Universal Time (UTC). If you do not see your time zone, set the time zone while referring to the difference with UTC.

MENU Selecting the Interface Language



Display the menu screen.

 Press the < MENU> button to display the menu screen.



Dunder the [¥2] tab, select [Language 湯].

- Press the <Q> button and select the [♥] tab.
- Turn the < ☆ > dial to select the [¥2] tab.
- Turn the <○> dial to select
 [Language ②], then press <⑤□>.



English	Norsk	Română
Deutsch	Svenska	Türkçe
Français	Español	العربية
Nederlands	Ελληνικά	กราชาวิโคก
Dansk	Русский	简体中文
Português	Polski	复體中文
Suomi	Cestina	한국어
Italiano	Magyar	日本語
Українська:		


Set the desired language.


- Turn the < > dial to select the language, then press < (FT) >.
- The interface language will change.

Attaching and Detaching a Lens

The camera is compatible with all Canon EF lenses. The camera cannot be used with EF-S or EF-M lenses.

Attaching a Lens









Remove the rear lens cap and the body cap by turning them as shown by the arrows.

Attach the lens.

Align the red dots on the lens and camera and turn the lens as shown by the arrow until it clicks in place.

Set the lens's focus mode switch to <AF>.

- <AF> stands for autofocus.
- <MF> stands for manual focus. Autofocus will not operate.
- Remove the front lens cap.

Detaching the Lens



While pressing the lens release button, turn the lens as shown by the arrow.

- Turn the lens until it stops, then detach it.
- Attach the rear lens cap to the detached lens.



- Do not look at the sun directly through any lens. Doing so may cause loss of vision
 - When attaching or detaching a lens, set the camera's power switch to <OFF>.
 - If the front part (focusing ring) of the lens rotates during autofocusing, do not touch the rotating part.

Minimizing Dust

- When changing lenses, do it quickly in a place with minimal dust.
- When storing the camera without a lens attached, be sure to attach the body cap to the camera.
- Remove dust on the body cap before attaching it.

Basic Operation

Adjusting the Viewfinder Clarity



Turn the dioptric adjustment knob.

- Turn the knob left or right so that the AF points in the viewfinder look sharp.
- If the knob is difficult to turn, remove the eyecup (p.236).



If the camera's dioptric adjustment still cannot provide a sharp viewfinder image, using Dioptric Adjustment Lens Eg (sold separately) is recommended.

Holding the Camera

To obtain sharp images, hold the camera still to minimize camera shake



Horizontal shooting

Vertical shooting

- 1. Wrap your right hand around the camera grip firmly.
- 2. Hold the lens bottom with your left hand.
- 3. Rest your hand's right index finger lightly on the shutter button.
- 4. Press your arms and elbows lightly against the front of your body.
- 5. To maintain a stable stance, place one foot slightly ahead of the other.
- 6. Press the camera against your face and look through the viewfinder.



To shoot while looking at the LCD monitor, see page 255.

Shutter Button

The shutter button has two steps. You can press the shutter button halfway. Then you can further press the shutter button completely.



Pressing Halfway

This activates autofocusing and the automatic exposure system that sets the shutter speed and aperture.

The exposure setting (shutter speed and aperture) is displayed in the viewfinder and on the LCD panel for 4 sec. (metering timer/ $\frac{1}{2}$ 4).



Pressing Completely

This releases the shutter and takes the picture.

Preventing Camera Shake

Hand-held camera movement during the moment of exposure is called camera shake. It can cause blurred pictures. To prevent camera shake, note the following:

- · Hold and steady the camera as shown on the preceding page.
- Press the shutter button halfway to autofocus, then slowly press the shutter button completely.



- In the <P> <Tv> <Av> <M> shooting modes, pressing the <AF-ON> button will execute the same operation as pressing the shutter button halfway.
- If you press the shutter button completely without pressing it halfway first
 or if you press the shutter button halfway and then press it completely
 immediately, the camera will take a moment before it takes the picture.
- Even during menu display or image playback, you can go back to shooting-ready by pressing the shutter button halfway.

Mode Dial



Turn the dial while holding down the lock release button at the center of the dial.

Use it to set the shooting mode.

Main Dial



(1) After pressing a button, turn the <5[™]> dial.

When you press a button such as <WB• (> < DRIVE•AF > < (> - ISO > . the respective function remains selected for 6 sec. (♂6). During this time, you can turn the < >> dial to change the setting. When the function selection ends or if you press the shutter button halfway, the camera will be ready to shoot.

Use this dial to select the metering mode, AF operation, ISO speed, AF point, etc.



(2) Turn the < > dial only.

While looking at the viewfinder or LCD panel, turn the < 2 > dial to change the settina.

Use this dial to set the shutter speed, aperture, etc.



The operations in (1) are possible even when the <LOCK▶> switch is set to the right (Multi function lock, p.59).

Quick Control Dial



(1) After pressing a button, turn the < (> dial.

When you press a button such as <WB \cdot ©><DRIVE \cdot AF><522 \cdot ISO>. the respective function remains selected for 6 sec. (♂6). During this time, you can turn the <>> dial to change the setting. When the function selection ends or if you press the shutter button halfway, the camera will be ready to shoot.

 Use this dial to select the white balance, drive mode, flash exposure compensation, AF point, etc.



(2) Turn the < >> dial only.

While looking at the viewfinder or LCD panel, turn the < () > dial to change the setting.

Use this dial to set the exposure compensation amount, the aperture setting for manual exposures, etc.

Multi-controller

The < \Leftrightarrow > consists of an eight-direction key and a button at the center. Use your thumb to tilt the < \Leftrightarrow > in the desired direction.



- Use it to select the AF point, correct the white balance, move the AF point or magnifying frame during Live View shooting, scroll around magnified images during playback, operate the Quick Control screen, etc.
- You can also use it to select and set menu items.
- For menus and Quick Control, the Multi-controller works only in the vertical and horizontal directions. It does not work in diagonal directions.

Touch Pad

During movie shooting, the touch pad provides a quiet way to adjust the shutter speed, aperture, exposure compensation, ISO speed, and sound recording level (p.302).


This function works when [5: Silent Control] is set to [Enable 5].



After pressing the <Q> button, tap the <>> dial's inner ring at the top, bottom, left, or right.

IOCK▶ Multi Function Lock

By setting [. . 3: Multi function lock] (p.410) and moving the < LOCK ▶> switch to the right, you can prevent the Main Dial, Quick Control Dial, and Multi-controller from moving and changing a setting inadvertently.



<LOCK▶> switch set to the left: Lock released

<LOCK▶> switch set to the right: Lock engaged



If the <LOCK>> switch is set to the right and you try to operate any of the locked camera controls, <L> will appear in the viewfinder and on the LCD panel. Also, [LOCK] will appear on the Quick Control screen (p.60).

LCD Panel Illumination



You can illuminate the LCD panel by pressing the < 3 > button. Turn on (6) or off the LCD panel illumination by pressing the < 3 > button.



During a bulb exposure, pressing the shutter button completely will turn off the LCD panel illumination.

Displaying Quick Control Screen

After you press the <**INFO.**> button a number of times (p.442), the Quick Control screen (p.62) or Custom Quick Control screen (p.427) will appear. You can then check the current shooting function settings. Pressing the <**(**\alpha\)> button enables Quick Control of the shooting function settings (p.61).

Then you can press the <**INFO.**> button to turn off the screen.





Q Quick Control for Shooting Functions

You can directly select and set the shooting functions displayed on the LCD monitor. This is called Quick Control.

The basic operating procedures are the same for the Quick Control screen (p.60) and the Custom Quick Control screen (p.427).



Press the <Q> button (\$10).

The Quick Control screen will appear.



Set the desired functions.

- Use < € > to select a function.
- The setting of the selected function is displayed.
- Turn the <∅> or <਼ਨੋ\ > dial to change the setting.







<P/Tv/Av/M/B> modes






Take the picture.

- Press the shutter button completely to take the picture.
- The captured image will be displayed.



In the < T > mode with the Quick Control screen displayed, you can only set recording function, card selection, image-recording quality, and drive mode.

Settable Functions on Quick Control Screen





Functions marked with an asterisk cannot be set with the Quick Control screen.

Custom Quick Control Screen

You can customize the layout of the Custom Quick Control screen. This feature lets you display and position the shooting functions on the Custom Quick Control screen as desired. For details, see page 427.



On the Custom Quick Control screen, if you press the <Q> button and there are no functions you can set with Quick Control, the Quick Control icon on the lower left of the screen will be displayed in orange.

Quick Control Screen








- Select a function and press <
 <i>>.

 The function setting screen will appear.
- Turn the < > or < > dial to change some of the settings. There are also functions that are set by pressing the button.
- Press < (st) > to finalize the setting and return to the previous screen.
- When you select <a>(p.413) and press the <a>MENU> button, the previous screen will reappear.


MENU Menu Operations

You can set various settings with the menus such as the image-recording quality, date/time, etc.




A Mode Menu Screen






* Certain menu tabs and menu items are not displayed in the $<\mathbb{A}^+>$ mode.

P/Tv/Av/M/B Mode Menu Screen

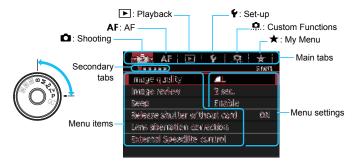

Menu Setting Procedure




Display the menu screen.

 Press the < MENU> button to display the menu screen.


Select a tab.

- Each time you press the <Q> button, the main tab will switch.
- Turn the < > dial to select a secondary tab.




Select the desired item.

 Turn the < >> dial to select the item, then press < (ET) >.



Select the setting.

- Turn the < >> dial to select the desired setting.
- The current setting is indicated in blue.



Adjust the setting.

Press <(sET) > to set it.

Exit the setting.


 Press the <MENU> button to exit the menu and return to shooting-ready.



- The explanation of menu functions hereinafter assumes that you have pressed the < MENU > button to display the menu screen.
- You can also use <♣> to operate and set menu functions. (Except for [1: Erase images] and [1: Format card].)
- To cancel the operation, press the <MENU> button.
- For details about each menu item, see page 460.

Dimmed Menu Items

Example: When Multi Shot Noise Reduction is set





Dimmed menu items cannot be set. The menu item is dimmed if another function setting is overriding it.

You can see the overriding function by selecting the dimmed menu item and pressing < (SET) >.

If you cancel the overriding function's setting, the dimmed menu item will become settable.



Some dimmed menu items will not show the overriding function.



With [4: Clear all camera settings], you can reset the menu functions to the default settings (p.70).

Before You Start

MINU Formatting the Card

If the card is new or was previously formatted by another camera or computer, format the card with this camera.



Cautions for Formatting the Card

When the card is formatted, all images and data on the card will be erased. Even protected images will be erased, so make sure there is nothing you need to keep. If necessary, transfer the images and data to a computer, etc., before formatting the card.



Select [Format card].

Under the [1] tab. select [Format card], then press < (set) >.



Select the card.

- [1] is the CF card, and [2] is the SD card
- Select the card, then press < (set) >.



OK

Cancel

Select [OK].

The card will be formatted

 When [2] is selected, low-level formatting is possible (p.68). For low-level formatting, press the <前> button to append [Low level format with a checkmark <√>. then select [OK].



- The card is new.
- The card was formatted by a different camera or a computer.
- The card is full with images or data.
- A card-related error is displayed (p.487).

Low-level Formatting

- Perform low-level formatting if the SD card's reading or writing speed seems slow or if you want to totally erase all data on the card.
- Since low-level formatting will erase all recordable sectors on the SD card, the formatting will take longer than normal formatting.
- You can stop the low-level formatting by selecting [Cancel]. Even in this
 case, normal formatting will be completed and you can use the SD card as
 usual.




- When the card is formatted or data is erased, only the file management information is changed. The actual data is not completely erased. Be aware of this when selling or discarding the card. When discarding the card, execute low-level formatting or destroy the card physically to prevent the personal data from being leaked.
- Before using a new Eye-Fi card (p.451), the software on the card must be installed on your computer. Then format the card with the camera.



- The card capacity displayed on the card format screen may be smaller than the capacity indicated on the card.
- This device incorporates exFAT technology licensed from Microsoft.

MENU Disabling the Beeper

You can prevent the beeper from sounding when focus is achieved or during self-timer operation.



Select [Beep].

- Under the [1] tab, select [Beep], then press < (SET) >.
- Select [Disable].
 - Select [Disable], then press < (SET) >.
 - The beeper will not sound.

MENU Setting the Power-off Time/Auto Power Off

To save battery power, the camera turns off automatically after a set time of idle operation elapses. The default setting is 1 min., but this setting can be changed. If you do not want the camera to turn off automatically, set this to [Disable]. After the power turns off, you can turn on the camera again by pressing the shutter button or other buttons



Select [Auto power off].

Under the [¥2] tab, select [Auto power off], then press < (FT)>.

Set the desired time.


Select the desired setting, then press <(SET) >.



Even if [Disable] is set, the LCD monitor will turn off automatically after 30 min. to save power. (The camera's power does not turn off.)

MENU Setting the Image Review Time

You can set how long the image is displayed on the LCD monitor just after shooting. To keep the image displayed, set [**Hold**]. To not have the image displayed, set [**Off**].



Select [Image review].


- Under the [△1] tab, select [Image review], then press <(x̄)>.
- Set the desired time.
 - Select the desired setting, then press <(ET)>.



If [Hold] is set, the image will be displayed until the auto power off time elapses.

MENU Reverting the Camera to the Default Settings *

The camera's shooting function settings and menu settings can be reverted to their defaults.



Select [Clear all camera settings].

 Under the [¥4] tab, select [Clear all camera settings], then press <(€F)>.



Select [OK].

Clearing all the camera settings will reset the camera to the default settings on pages 71-73.

Shooting Function Settings

AF operation	One-Shot AF	
AF area selection	Single-point AF	
mode	(Manual Selection)	
AF point selection	Center	
Registered AF point	Canceled	
Metering mode	(Evaluative metering)	
ISO speed	Auto	
ISO speed range	Minimum limit: 100	
	Maximum limit: 6400	
Auto ISO range	Minimum limit: 100 Maximum limit: 3200	
Minimum shutter	Auto	
speed	71010	
Drive mode	☐ (Single shooting)	
Exposure	Canceled	
compensation/AEB		
Flash exposure compensation	Canceled	
Multiple exposure	Disable	
HDR Mode	Disable HDR	
Interval timer	Disable	
Bulb timer	Disable	
Anti-flicker shooting	Disable	
Mirror lockup	Disable	
Viewfinder display		
Electronic level	Hide	
Grid display	Hide	
Show/hide in	Only Flicker	
viewfinder	selected	
Custom Functions	Unchanged	
External Speedlite		
Flash firing	Enable	
E-TTL II	Evaluative flash	
flash metering	metering	
Flash sync. speed in Av mode	Auto	
III AV IIIOUE		

AF Settings

Ar Settings				
Case 1 - 6	Case1/Parameter settings of all cases cleared			
Al Servo 1st image priority	Equal priority			
Al Servo 2nd image priority	Equal priority			
Lens electronic MF	Enable after One-Shot AF			
AF-assist beam firing	Enable			
One-Shot AF release priority	Focus priority			
Lens drive when AF impossible	Continue focus search			
Selectable AF point	61 points			
Select AF area selection mode	All items selected			
AF area selection method	M-Fn button			
Orientation linked AF point	Same for both vertical/horizontal			
Initial AF point, (3) Al Servo AF	Auto			
Automatic AF point selection: EOS iTR AF	Enable			
Manual AF point selection pattern	Stops at AF area edges			
AF point display during focus	Selected (constant)			
VF display illumination	Auto			
AF point during Al Servo AF	Non illuminated			
AF Microadjustment	Disable/ Adjustment amount retained			

Image Recording Settings

Image quality	4 L
Crop/aspect ratio	Full-frame
Picture Style	Standard
Auto Lighting Optimizer	Standard
Lens aberration corr	ection
Peripheral illumination correction	Enable/Correction data retained
Chromatic aberration correction	Enable/Correction data retained
White balance	AWE (Ambience priority)
Custom White Balance	Canceled
White balance shift	Canceled
White balance bracketing	Canceled
Color space	sRGB
Long exposure noise reduction	Disable
High ISO speed noise reduction	Standard
Highlight tone priority	Disable
Record function	Standard
File numbering	Continuous
File name	Preset code
Auto cleaning	Enable
Dust Delete Data	Erased

Camera Settings

Camera Settings		
Auto power off	1 min.	
Веер	Enable	
Release shutter without card	Enable	
Image review time	2 sec.	
Highlight alert	Disable	
AF point display	Disable	
Playback grid	Off	
Histogram display	Brightness	
Movie playback count	Unchanged	
Magnification (Approx.)	2x (magnify from center)	
Control over HDMI	Disable	
Image jump wl 🕾	☆ (10 images)	
Auto rotate	On 🗖 🖳	
LCD brightness	Auto	
Date/Time/Zone	Unchanged	
Eye-Fi settings	Disable	
Language	Unchanged	
Video system	Unchanged	
(NEO) button display options	All items selected	
Custom Quick Control	Unchanged	
RATE button function	Rating	
Custom shooting mode	Unchanged	
Copyright information	Unchanged	
Configure: MY MENU	Unchanged	
Menu display	Normal display	

Live View Shooting Settings

Enable
じ+Tracking
Disable
Off
Enable
Mode 1
8 sec.

Movie Shooting Settings

Movie Shooting Settings							
Movie Servo AF	Disable						
AF method	∵+Tracking						
Grid display	Off						
Movie recording size	NTSC: FHD 29,977 IPB PAL: FHD 25,007 IPB						
Sound recording	Auto						
Wind filter	Disable						
Attenuator	Disable						
Silent LV shooting	Mode 1						
Metering timer	8 sec.						
Time code							
Count up	Unchanged						
Start time setting	Unchanged						
Movie recording count	Unchanged						
Movie playback count	Unchanged						
Drop frame	Unchanged						
Silent control	Disable ①						
button function	®AF/ △						
Time-lapse movie	Disable						

Displaying the Grid

You can display a grid in the viewfinder to help you check the camera tilt or compose the shot.



Select [Viewfinder display].

- Under the [2] tab, select [Viewfinder display], then press < (SET) >.
- Select [Grid display].
 - Select [Show].
 - When you exit the menu, the grid will appear in the viewfinder.

You can display a grid on the LCD monitor during Live View shooting and before you start shooting a movie (p.265, 315).


- Displaying the Electronic Level

You can display the electronic level on the LCD monitor and in the viewfinder to help you correct camera tilt.

Displaying the Electronic Level on the LCD Monitor







Vertical level Horizontal level



Press the <INFO.> button.

- Each time you press the <INFO.> button, the screen display will change.
- Display the electronic level.
- If the electronic level does not appear, set [43: INTO button display options so that the electronic level can be displayed (p.442).

Check the camera's tilt.

- The horizontal and vertical tilt are displayed in 1° increments.
- When the red line turns green, it indicates that the tilt is almost corrected



- Even when the tilt is corrected, there may be a margin of error of approx. +1°
- If the camera is very tilted, the electronic level's margin of error will be larger.



During Live View shooting and before movie shooting, you can also display the electronic level as described above (except with £+ Tracking).

MENU Displaying the Electronic Level in the Viewfinder

An electronic level can be displayed on the upper part of the viewfinder. Since this can be displayed while you shoot, you can correct the camera tilt while shooting.



Select [Viewfinder display].

 Under the [¥2] tab, select [Viewfinder display], then press <(€T)>.




Select [Electronic level].



Viewfinder display Electronic level Hide Show

Press the shutter button halfway.

- ➤ The electronic level will be displayed in the viewfinder.
- This also works with vertical shooting.



0

Even when the tilt is corrected, there may be a margin of error of approx. $\pm 1^{\circ}$.

MENU Setting the Viewfinder Information Display ★

The shooting function settings (Battery, White balance, Drive mode, AF operation, Metering mode, Image quality: JPEG/RAW, Flicker detection) can be displayed in the viewfinder. By default, only Flicker detection is checkmarked [√].



Select [Viewfinder display].

 Under the [¥2] tab, select [Viewfinder display], then press <(€)>.

Select [Show/hide in viewfinder].

Checkmark [√] the information to be displayed.

- Select the information to display and press <((a)) > to append a checkmark
 √>.
- Repeat this procedure to append a checkmark [\(\)] to all the information to be displayed. Then select [OK].
- When you exit the menu, the checkmarked information will appear in the viewfinder (p.31).



If no card is inserted in the camera, the image-recording quality will not be displayed.



- When you press the <WB⋅S> or <DRIVE·AF> button, operate the lens's focus mode switch, or when a lens equipped with electronic manual focusing function is used and the AF/MF switches as the lens's focusing ring is turned (p.120), the respective information will appear in the viewfinder regardless of whether it is checkmarked.

Help

When [INTO Help] is displayed at the bottom of the menu screen, the feature's description (Help) can be displayed. The Help screen is displayed only while you hold down the <INFO.> button. If the Help fills more than one screen, a scroll bar will appear on the right edge. To scroll, hold down the <INFO.> button and turn the <()> dial.

Example: [AF1: Case2]



Example: [AF4: Orientation linked AF point]




Example: [.\Omega.3: Multi function lock]



Basic Shooting

(Scene Intelligent Auto) mode for easy picture taking.

In the < (A) > mode, all you do is point and shoot and the camera sets everything automatically (p.456). Also, to prevent botched pictures due to mistaken operations, advanced shooting function settings cannot be changed.



Auto Lighting Optimizer

In the < (> mode, the Auto Lighting Optimizer (p.182) will adjust the image automatically to obtain the optimum brightness and contrast. It is also enabled by default in the <P>, <Tv>, or < **Av** > mode.

Fully Automatic Shooting (Scene Intelligent Auto)

<a hr



Set the Mode Dial to < \triangle $^{+}$ >.

 Turn the Mode Dial while holding down the lock release button at the center.



- All the AF points will be used to focus, and the camera will focus on the closest object.
- Aiming the center of the Area AF frame over the subject will make focusing easier.

Focus on the subject.

- Press the shutter button halfway. The lens's focusing ring will rotate to focus.
- During the autofocus operation, < ▲ ∠ > will be displayed.
- The AF point that achieves focus will be displayed. At the same time, the beeper will sound and the focus indicator < ●> will light up.
- In low light, the AF point(s) will light up briefly in red.









Focus indicator



Take the picture.

- Press the shutter button completely to take the picture.
- The captured image will be displayed for 2 sec. on the LCD monitor.



The < (> mode makes the colors look more impressive in nature, outdoor, and sunset scenes. If you did not obtain the desired color tones, change the mode to <**P**>, <**Tv**>, <**Av**>, or <**M**>, set a Picture Style other than < ... then shoot again (p.164).

FAQ

- The focus indicator <●> blinks and focus is not achieved. Aim the Area AF frame over an area with good contrast, then press the shutter button halfway (p.55). If you are too close to the subject, move away and try again. If focus cannot be achieved, the AF status indicator < ▶ → > will also blink.
- When focus is achieved, the AF points do not light up in red. The AF points light up in red only when focus is achieved in low-light conditions.
- Multiple AF points light up simultaneously. Focus has been achieved at all those points. You can take the picture as long as an AF point covering the target subject is lighting up.
- The beeper continues to beep softly. (The focus indicator <>> does not light up.)
 - It indicates that the camera is focusing continuously on a moving subject. (The AF status indicator < > > lights up, but the focus confirmation light < >> does not light up.) You can take sharp pictures of a moving subject.

Note that focus lock (p.83) will not work in this case.

Pressing the shutter button halfway does not focus on the subject.

If the focus mode switch on the lens is set to **<MF>** (manual focus), set it to **<AF>** (autofocus).

The shutter speed display is blinking.

Since it is too dark, taking the picture may result in a blurred subject due to camera shake. Using a tripod or a Canon EX-series Speedlite (sold separately, p.244) is recommended.

When the external flash was used, the bottom part of the picture came out unnaturally dark.

If a hood is attached to the lens, it can obstruct the flash light. If the subject is close, detach the hood before taking the picture with flash.

Full Auto Techniques (Scene Intelligent Auto)

Recomposing the Shot



Depending on the scene, position the subject toward the left or right to create a balanced background and good perspective.


Shooting a Moving Subject



In the Label Note: The Subject moves (distance to camera changes) while or after you focus, AI Servo AF will take effect to focus on the subject continuously. (The beeper will continue beeping softly.) As long as you keep the Area AF frame positioned over the subject while pressing the shutter button halfway, the focusing will be continuous. When you want to take the picture, press the shutter button completely.

Live View Shooting

You can shoot while viewing the image on the LCD monitor. This is called "Live View shooting". For details, see page 255.



Set the Live View shooting/Movie shooting switch to < ->.



Display the Live View image on the LCD monitor.

- Press the < START/ STOP
 button.
- The Live View image will appear on the LCD monitor.



Focus on the subject.


- Press the shutter button halfway to focus.
- When focus is achieved, the AF point will turn green and the beeper will sound.



Take the picture.

- Press the shutter button completely.
- The picture is taken and the captured image is displayed on the LCD monitor.
- When the playback display ends, the camera will return to Live View shooting automatically.
- Press the < START/ > button to exit the Live View shooting.

Setting the AF and **Drive Modes**



The AF points in the viewfinder are arranged to make AF shooting suitable for a wide variety of subjects and scenes.


You can also select the AF operation and drive mode that best match the shooting conditions and subject.


- A ☆ icon at the upper right of a page title indicates a function that can be used only in the following modes: <P> <Tv><Av><M>.
- In the < A[†] > mode, the AF operation and AF area selection. mode are set automatically.

AF: Selecting the AF Operation [★]

You can select the AF operation characteristics to suit the shooting conditions or subject. In the < (> mode, "AI Focus AF" is set automatically.









Press the <DRIVE•AF> button. (♂6)




Select the AF operation.

 While looking at the LCD panel or in the viewfinder, turn the < △> dial.

ONE SHOT: One-Shot AF AI FOCUS: AI Focus AF AI SERVO: AI Servo AF





One-Shot AF for Still Subjects



AF point Focus indicator

Suited for still subjects. When you press the shutter button halfway, the camera will focus only once.

- When focus is achieved, the AF point that achieved focus will be displayed, and the focus indicator < >> in the viewfinder will also light up.
- With evaluative metering (p.212), the exposure setting will be set at the same time as focus is achieved.
- While you hold down the shutter button halfway, the focus will be locked. You can then recompose the shot if desired.



- If focus cannot be achieved, the focus indicator < ●> in the viewfinder will blink. If this occurs, the picture cannot be taken even if the shutter button is pressed completely. Recompose the shot and try to focus again or see "When Autofocus Fails" (p.140).
- If [1: Beep] is set to [Disable], the beeper will not sound when focus is achieved.
- After achieving focus with One-Shot AF, you can lock the focus on a subject and recompose the shot. This is called "focus lock". This is convenient when you want to focus on a peripheral subject not covered by the Area AF frame.

Al Servo AF for Moving Subjects

This AF operation is suited for moving subjects when the focusing distance keeps changing. While you hold down the shutter button halfway, the camera will keep focusing on the subject continuously.

- The exposure is set at the moment the picture is taken.
- When the AF area selection mode (p.90) is set to 61-point automatic selection AF, focus tracking will continue as long as the Area AF frame covers the subject.

With Al Servo AF, the beeper will not sound even when focus is achieved. Also, the focus indicator < > in the viewfinder will not light up.

Al Focus AF for Switching the AF Operation Automatically

Al Focus AF switches the AF operation from One-Shot AF to Al Servo AF automatically if a still subject starts moving.

 After the subject is focused in One-Shot AF, if the subject starts moving, the camera will detect the movement, change the AF operation automatically to AI Servo AF, and start tracking the moving subject.



When focus is achieved with AI Focus AF with the Servo operation active, the beeper will continue beeping softly. However, the focus indicator < > in the viewfinder will not light up. Note that focus will not be locked in this case.

AF Operation Indicator



While you press the shutter button halfway and the camera focuses with AF, the < ▲ → icon will appear under the focus indicator in the viewfinder.

In One-Shot AF mode, the icon also appears if you press the shutter button halfway after focus is achieved.

AF Points Lighting Up in Red

By default, the AF points light up in red in low-light conditions. In the $<\mathbf{P}>$, $<\mathbf{Tv}>$, $<\mathbf{Av}>$, $<\mathbf{M}>$, or $<\mathbf{B}>$ mode, you can set whether to have the AF points light up in red (p.132).


Selecting the AF Area and AF Point ★

The camera has 61 AF points for autofocusing. You can select the AF area selection mode and AF point(s) suiting the scene or subject.

Depending on the lens attached to the camera, the number of usable AF points and AF point patterns will differ. For details, see "Lenses and Usable AF Points" on page 100.

AF Area Selection Mode

You can select one of six AF area selection modes. For the setting procedure, see page 92.




Single-point Spot AF (Manual selection)

For pinpoint focusing.




□ Single-point AF (Manual selection)

Select one AF point to focus.



AF point expansion (Manual selection :)

The manually-selected AF point < \(> \) and four adjacent AF points < \(> \) (above, below, on the left, and on the right) are used to focus.







AF point expansion (Manual selection, surrounding points)

The manually-selected AF point < > and the surrounding AF points < > are used to focus

Zone AF (Manual selection of zone)

One of nine zones is used to focus.

() 61-point automatic selection AF

The Area AF frame (entire AF area) is used to focus. This mode is set automatically in the (a†) > mode.

Selecting the AF Area Selection Mode



Press the <⊕> button. (७6)



Press the <M-Fn> button.

- Look through the viewfinder and press the <M-Fn> button.
- Each time you press the <M-Fn> button, the AF area selection mode changes.




- With [AF4: Select AF area selec. mode], you can limit the selectable AF area selection modes (p.125).
- If you set [AF4: AF area selection method] to [→ Main Dial], you can select the AF area selection mode by pressing the < > button, then turning the < > dial (p.126).

Selecting the AF Point Manually


You can manually select the AF point or zone.





- The AF points will be displayed in the viewfinder.
- In AF point expansion modes, adjacent AF points will also be displayed.
- In the Zone AF mode, the selected zone will be displayed.





Select an AF point.

- The AF point selection will change in the direction you tilt < ⊕>. If you press < ⊕> straight down, the center AF point (or center zone) will be selected.
- You can also select a horizontal AF point by turning the < △ > dial and select a vertical AF point by turning the < ○ > dial.
- In the Zone AF mode, turning the <>> or <>> dial will change the zone in a looping sequence.



- When [AF4: Initial AF pt, () Al Servo AF] is set to [Initial () AF pt selected] (p.128), you can use this method to manually select the Al Servo's AF starting position.
- When you press the < → button, the LCD panel displays the following:</p>
 - 61-point automatic selection AF and Zone AF: [] AF
 - Single-point Spot AF, Single-point AF, and AF point expansion: SEL []
 (Center)/SEL AF (Off-center)

AF Point Display Indications

Pressing the < > button lights up the AF points that are cross-type AF points for high-precision autofocusing. The blinking AF points are horizontal-line or vertical-line sensitive. For details, see pages 99-104.

Registering the AF point

For details on registering the AF point, see page 418.

AF Area Selection Modes [★]

Single-point	Spot AF (Manual selection)
	For pinpoint focusing over a narrower area than with single-point AF (manual selection). Select one AF point < 🗈 > to focus. Effective for pinpoint focusing or focusing overlapping subjects such as an animal in a cage. Since Single-point Spot AF (manual selection) covers a very small area, focusing may be difficult during hand-held shooting or for a moving subject.

	Single-p	oint AF	(Manual	selection)
--	----------	---------	---------	------------

						Select one AF point < □ > to be used for focusing.
	0	0				
				0	•	
	0	0	0	0	0	
· [
		0	0	0	0	

- AF point expansion (Manual selection -)

The manually-selected AF point < > and adjacent AF points < > (above, below, on the left, and on the right) are used to focus. Effective when it is difficult to track a moving subject with just one AF point. With AI Servo AF, the initial manually-selected AF point < > must focus-track the subject first. However, it is superior to Zone AF in focusing on the target subject.

With One-Shot AF, when focus is achieved with expanded AF points, the expanded AF points < > will also be displayed along with the manually-selected AF point < >.

			0	0	0									•	0							0	0 0						[0	0								0	0 1	0			
0					G	0			0		0	0	0			0			D			D			D					a			D	G									= e	1 0
0		0		D	G	0	0	D	0	0	0	0		0	0	0	0		D			0	0 0	D	D	0	D	G .			0		D	a	D	0	0 -		0		0 1	0 0		- P
	0 0	0		D	O	0	0	D	0	0	0	0	0	0	0	0	0		D			0	0	D	D		D	O.			D	D	D	a	D	0	0		0					
0		0	0	D	0	0	0	D	0	0	D	0	0	0	0	D	D		D	О	D	0	0 0		D	0	D	0	-		D		D	а	D	0	0 -	0	0	0 1	0 1	0 0	0 0	0 0

AF point expansion (Manual selection, surrounding points)

The manually-selected AF point < \square > and surrounding AF points < \square > are used to focus. The AF point expansion is larger than with AF point expansion (manual selection $-\frac{n}{2}$), so the focusing is executed over a wider area. Effective when it is difficult to track a moving subject with just one AF point.

Al Servo AF and One-Shot AF work in the same way as with AF point expansion (manual selection • node (p.95).

Zone AF (Manual selection of zone)

The AF area is divided into nine focusing zones for focusing. All the AF points in the selected zone are used for the automatic AF point selection. It is superior to single-point AF or AF point expansion in achieving focus, and it is effective for moving subjects.

However, since it is inclined to focus on the nearest subject, focusing on a specific target may be more difficult than with single-point AF or AF point expansion.

The AF point(s) achieving focus is displayed as $<\square>$.

(3) 61-point automatic selection AF

The Area AF frame (entire AF area) is used to focus. This mode is set automatically in the $< \Delta^+ >$ mode.

The AF point(s) achieving focus is displayed as $< \square >$.



With One-Shot AF, pressing the shutter button halfway will display the AF point(s) < \[> \] > that achieved focus. If multiple AF points are displayed, it means they all have achieved focus. This mode tends to focus on the nearest subject.



With AI Servo AF, you can set the AI Servo AF's starting position with [Initial AF pt, ③ AI Servo AF] (p.128). As long as the Area AF frame can track the subject during shooting, focusing will continue.



- When AI Servo AF mode is set with 61-point automatic selection AF, or Zone AF (manual selection of zone), the active AF point < > will keep switching to track the subject. However, under certain shooting conditions (such as when the subject is small), it may not be able to track the subject. Also, in low temperatures, the tracking response may become slower.
- With Single-point Spot AF (manual selection), focusing with an EOSdedicated, external Speedlite's AF-assist beam may be difficult.
- If a peripheral AF point or a wide-angle lens is used, achieving focus may be difficult with an EOS-dedicated, external Speedlite's AF-assist beam.
 In such a case, use an AF point closer to the center.
- When the AF point(s) light up, part or all of the viewfinder may light up in red. Also, if [12 4: Crop/aspect ratio] is set, the semi-transparent, masked area may light up in red. This is a characteristic of the AF point display (using liquid crystal).
- In low temperatures, the AF point's display may be difficult to see. This is a characteristic of AF point display (using liquid crystal).




- With [AF4: Orientation linked AF point], you can set the AF area selection mode + AF point (or only the AF point) separately for the horizontal and vertical orientations (p.126).
- With [AF4: Selectable AF point], you can change the number of manually selectable AF points (p.124).

AF Sensor

The camera's AF sensor has 61 AF points. The illustration below shows the AF sensor pattern corresponding to each AF point. With f/2.8 or larger maximum aperture lenses, high-precision AF is possible at the viewfinder center.

Depending on the lens attached to the camera, the number of usable AF points and AF pattern will differ. For details, see pages 100-108.



*	These focusing sensors are geared to obtain higher precision focusing with f/2.8 or larger maximum aperture lenses. A diagonal cross pattern makes it easier to focus subjects that may be difficult to focus. They cover the five AF points vertically aligned at the center.
	These focusing sensors are geared to obtain high-precision focusing with f/4 or larger maximum aperture lenses. Since they have a horizontal pattern, they can detect vertical lines.
	These focusing sensors are geared for f/5.6 or larger maximum aperture lenses. Since they have a horizontal pattern, they can detect vertical lines. They cover the three columns of AF points at the viewfinder's center. The center AF point and the adjacent AF points at the top and bottom are compatible with f/8 or larger maximum-aperture lenses.
	These focusing sensors are geared for f/5.6 or larger maximum aperture lenses. Since they have a vertical pattern, they can detect horizontal lines. They cover all 61 AF points. The center AF point and the adjacent AF points on the left and on the right are compatible with f/8 or larger maximum-aperture lenses.

Lenses and Usable AF Points



- Although the camera has 61 AF points, the number of usable AF points and focusing patterns will differ depending on the lens. The lenses are thereby classified into nine groups from A to I.
- When using a lens in Groups F to H, fewer AF points will be usable.
- See which group each lens belongs to on pages 105-108. Check which group the lens in use belongs to.



- When you press the < : > button, the AF points indicated by the ☐ mark will blink. (The ■/■/■ AF points will stay lit.) Regarding lighting up or blinking of the AF points, see page 94.
- Regarding new lenses marketed after the EOS 5DS/EOS 5DS R Mark III (in the first half of 2015), check the Canon Web site to see which group they belong to.
- Some lenses may not be available in certain countries or regions.

Group A

Autofocusing with 61 points is possible. All the AF area selection modes are selectable.



- : Dual cross-type AF point. Subject tracking is superior and the focusing precision is higher than with other AF points.
- Cross-type AF point. Subject tracking is superior and highprecision focusing is achieved.
- : AF points sensitive to horizontal lines.

Group B

Autofocusing with 61 points is possible. All the AF area selection modes are selectable.



- : Dual cross-type AF point. Subject tracking is superior and the focusing precision is higher than with other AF points.
- Cross-type AF point. Subject tracking is superior and highprecision focusing is achieved.
- ☐: AF points sensitive to horizontal lines

Group C

Autofocusing with 61 points is possible. All the AF area selection modes are selectable.



- : Cross-type AF point. Subject tracking is superior and highprecision focusing is achieved.
- : AF points sensitive to horizontal lines

Group D

Autofocusing with 61 points is possible. All the AF area selection modes are selectable.



- : Dual cross-type AF point. Subject tracking is superior and the focusing precision is higher than with other AF points.
- : Cross-type AF point. Subject tracking is superior and highprecision focusing is achieved.
- : AF points sensitive to horizontal lines

Group E

Autofocusing with 61 points is possible. All the AF area selection modes are selectable



- : Cross-type AF point. Subject tracking is superior and highprecision focusing is achieved.
- : AF points sensitive to horizontal lines

Group F

Autofocusing with only 47 points is possible. (Not possible with all 61 AF points.) All the AF area selection modes are selectable. During automatic AF point selection, the outer frame marking the AF area (Area AF frame) will be different from 61-point automatic selection AF.



- : Cross-type AF point. Subject tracking is superior and highprecision focusing is achieved.
- : AF points sensitive to horizontal lines.
- : Disabled AF points (not displayed).


Group G

Autofocusing with only 33 points is possible. (Not possible with all 61 AF points.) All the AF area selection modes are selectable. During automatic AF point selection, the outer frame marking the AF area (Area AF frame) will be different from 61-point automatic selection AF.



- Cross-type AF point. Subject tracking is superior and high-precision focusing is achieved.
- \square : AF points sensitive to horizontal lines.
- : Disabled AF points (not displayed).

Group H



- : Cross-type AF point. Subject tracking is superior and highprecision focusing is achieved.
- □: AF points sensitive to vertical lines (top and bottom AF points adjacent to the center AF point) or horizontal lines (left and right AF points adjacent to the center AF point).


 Not manually selectable. It works only when "AF point expansion (manual selection "♣")" is selected.
- : Disabled AF points (not displayed).



- If the maximum aperture is smaller than f/5.6 (maximum aperture number is between f/5.6 and f/8), focus may not be achieved with AF when shooting low-contrast or low-light subjects.
- When Extender EF2x is attached to the EF180mm f/3.5L Macro USM lens. AF is not possible.
- If the maximum aperture is smaller than f/8 (maximum aperture number exceeds f/8), AF is not possible during viewfinder shooting.

Group I

Autofocusing with 61 points is possible. All the AF area selection modes are selectable.



- Cross-type AF point. Subject tracking is superior and highprecision focusing is achieved.
- □: AF points sensitive to horizontal lines.

Lens Group Designations (as of March 2015)

EF14mm f/2.8L USM	В
EF14mm f/2.8L II USM	В
EF15mm f/2.8 Fisheye	В
EF20mm f/2.8 USM	В
EF24mm f/1.4L USM	Α
EF24mm f/1.4L II USM	Α
EF24mm f/2.8	В
EF24mm f/2.8 IS USM	В
EF28mm f/1.8 USM	Α
EF28mm f/2.8	D
EF28mm f/2.8 IS USM	В
EF35mm f/1.4L USM	Α
EF35mm f/2	Α
EF35mm f/2 IS USM	Α
EF40mm f/2.8 STM	D
EF50mm f/1.0L USM	Α
EF50mm f/1.2L USM	Α
EF50mm f/1.4 USM	Α
EF50mm f/1.8	Α
EF50mm f/1.8 II	Α
EF50mm f/2.5 Compact Macro	С
EF50mm f/2.5 Compact Macro	_
+ LIFE SIZE Converter	Е
EF85mm f/1.2L USM	Α
EF85mm f/1.2L II USM	Α
EF85mm f/1.8 USM	Α
EF100mm f/2 USM	Α
EF100mm f/2.8 Macro	С
EF100mm f/2.8 Macro USM	Е
EF100mm f/2.8L Macro IS USM	С
EF135mm f/2L USM	Α
EF135mm f/2L USM	
+ Extender EF1.4x	Α
EF135mm f/2L USM + Extender EF2x	С
EF135mm f/2.8 (Softfocus)	Α
EF180mm f/3.5L Macro USM	G
EF180mm f/3.5L Macro USM	_
+ Extender EF1.4x	G
EF200mm f/1.8L USM	Α
EF200mm f/1.8L USM	
+ Extender EF1.4x	A*
EF200mm f/1.8L USM + Extender EF2x	C*
EF200mm f/2L IS USM	Α

EF200mm f/2L IS USM + Extender EF1.4x	Α
EF200mm f/2L IS USM	С
+ Extender EF2x	C
EF200mm f/2.8L USM	Α
EF200mm f/2.8L USM	С
+ Extender EF1.4x	C
EF200mm f/2.8L USM	Е
+ Extender EF2x	_
EF200mm f/2.8L II USM	Α
EF200mm f/2.8L II USM	(
+ Extender EF1.4x	С
EF200mm f/2.8L II USM	L
+ Extender EF2x	Е
EF300mm f/2.8L USM	Α
EF300mm f/2.8L USM	C*
+ Extender EF1.4x	C
EF300mm f/2.8L USM	E*
+ Extender EF2x	_
EF300mm f/2.8L IS USM	Α
EF300mm f/2.8L IS USM	С
+ Extender EF1.4x	C
EF300mm f/2.8L IS USM	Е
+ Extender EF2x	_
EF300mm f/2.8L IS II USM	Α
EF300mm f/2.8L IS II USM	С
+ Extender EF1.4x	C
EF300mm f/2.8L IS II USM	Е
+ Extender EF2x	_
EF300mm f/4L USM	С
EF300mm f/4L USM	Е
+ Extender EF1.4x	
EF300mm f/4L USM + Extender EF2x	H (f/8)
EF300mm f/4L IS USM	С
EF300mm f/4L IS USM	Е
+ Extender EF1.4x	_
EF300mm f/4L IS USM	H (f/8)
+ Extender EF2x	11 (1/0)
EF400mm f/2.8L USM	Α
EF400mm f/2.8L USM	C*
+ Extender EF1.4x	U
EF400mm f/2.8L USM	E*
+ Extender EF2x	1

F==	
EF400mm f/2.8L II USM	Α
EF400mm f/2.8L II USM	C*
+ Extender EF1.4x	Ŭ
EF400mm f/2.8L II USM	E*
+ Extender EF2x	-
EF400mm f/2.8L IS USM	Α
EF400mm f/2.8L IS USM	С
+ Extender EF1.4x	C
EF400mm f/2.8L IS USM	_
+ Extender EF2x	E
EF400mm f/2.8L IS II USM	Α
EF400mm f/2.8L IS II USM	
+ Extender EF1.4x	С
EF400mm f/2.8L IS II USM	
+ Extender EF2x	E
EF400mm f/4 DO IS USM	С
EF400mm f/4 DO IS USM	U
+ Extender EF1.4x	E
EF400mm f/4 DO IS USM	H (f/8)
+ Extender EF2x	` ′
EF400mm f/4 DO IS II USM	С
EF400mm f/4 DO IS II USM	E
+ Extender EF1.4x	_
EF400mm f/4 DO IS II USM	H (f/8)
+ Extender EF2x	` '
EF400mm f/5.6L USM	E
EF400mm f/5.6L USM	H (f/8)
+ Extender EF1.4x	11 (1/0)
EF500mm f/4L IS USM	С
EF500mm f/4L IS USM	Е
+ Extender EF1.4x	
EF500mm f/4L IS USM	11 (((0)
+ Extender EF2x	H (f/8)
EF500mm f/4L IS II USM	С
EF500mm f/4L IS II USM	_
+ Extender EF1.4x	E
EF500mm f/4L IS II USM	
+ Extender EF2x	H (f/8)
EF500mm f/4.5L USM	Е
EF500mm f/4.5L USM	Н
+ Extender EF1.4x	(f/8)*
EF600mm f/4L USM	(I/O)
EF600mm f/4L USM	
+ Extender EF1.4x	E*
+ LAIGHUEL ET 1.4X	Н
EF600mm f/4L USM + Extender EF2x	
	(f/8)*

EF600mm f/4L IS USM	С
EF600mm f/4L IS USM	F
+ Extender EF1.4x	_
EF600mm f/4L IS USM	H (f/8)
+ Extender EF2x	11 (1/0)
EF600mm f/4L IS II USM	C
EF600mm f/4L IS II USM	Е
+ Extender EF1.4x	
EF600mm f/4L IS II USM	H (f/8)
+ Extender EF2x	П (1/0)
EF800mm f/5.6L IS USM	F
EF800mm f/5.6L IS USM	H (f/8)
+ Extender EF1.4x	П (1/0)
EF1200mm f/5.6L USM	G
EF1200mm f/5.6L USM	Н
+ Extender EF1.4x	(f/8)*
EF8-15mm f/4L Fisheye USM	С
EF11-24mm f/4L USM	- 1
EF16-35mm f/2.8L USM	Α
EF16-35mm f/2.8L II USM	Α
EF16-35mm f/4L IS USM	С
EF17-35mm f/2.8L USM	Α
EF17-40mm f/4L USM	С
EF20-35mm f/2.8L	Α
EF20-35mm f/3.5-4.5 USM	E
EF22-55mm f/4-5.6 USM	F
EF24-70mm f/2.8L USM	В
EF24-70mm f/2.8L II USM	Α
EF24-70mm f/4L IS USM	С
EF24-85mm f/3.5-4.5 USM	Е
EF24-105mm f/3.5-5.6 IS STM	Е
EF24-105mm f/4L IS USM	С
EF28-70mm f/2.8L USM	Α
EF28-70mm f/3.5-4.5	F
EF28-70mm f/3.5-4.5 II	F
EF28-80mm f/2.8-4L USM	С
EF28-80mm f/3.5-5.6	F
EF28-80mm f/3.5-5.6 USM	F
EF28-80mm f/3.5-5.6 II	F
EF28-80mm f/3.5-5.6 II USM	F
EF28-80mm f/3.5-5.6 III USM	F
EF28-80mm f/3.5-5.6 IV USM	F
EF28-80mm f/3.5-5.6 V USM	F
EF28-90mm f/4-5.6	Е
EF28-90mm f/4-5.6 USM	Е
EF28-90mm f/4-5.6 II	Е

EF28-90mm f/4-5.6 II USM	E
EF28-90mm f/4-5.6 III	E
EF28-105mm f/3.5-4.5 USM	Е
EF28-105mm f/3.5-4.5 II USM	E
EF28-105mm f/4-5.6	F
EF28-105mm f/4-5.6 USM	F
EF28-135mm f/3.5-5.6 IS USM	Е
EF28-200mm f/3.5-5.6	Е
EF28-200mm f/3.5-5.6 USM	Е
EF28-300mm f/3.5-5.6L IS USM	Е
EF35-70mm f/3.5-4.5	F
EF35-70mm f/3.5-4.5A	F
EF35-80mm f/4-5.6	F
EF35-80mm f/4-5.6 PZ	F
EF35-80mm f/4-5.6 USM	F
EF35-80mm f/4-5.6 II	F
EF35-80mm f/4-5.6 III	F
EF35-105mm f/3.5-4.5	Е
EF35-105mm f/4.5-5.6	Н
EF35-105mm f/4.5-5.6 USM	Н
EF35-135mm f/3.5-4.5	Е
EF35-135mm f/4-5.6 USM	Е
EF35-350mm f/3.5-5.6L USM	F
EF38-76mm f/4.5-5.6	Е
EF50-200mm f/3.5-4.5	Ē
EF50-200mm f/3.5-4.5L	Е
EF55-200mm f/4.5-5.6 USM	Ē
EF55-200mm f/4.5-5.6 II USM	Е
EF70-200mm f/2.8L USM	A
EF70-200mm f/2.8L USM	
+ Extender EF1.4x	C*
EF70-200mm f/2.8L USM	
+ Extender EF2x	E*
EF70-200mm f/2.8L IS USM	Α
EF70-200mm f/2.8L IS USM	
+ Extender EF1.4x	С
EF70-200mm f/2.8L IS USM	
+ Extender EF2x	E
EF70-200mm f/2.8L IS II USM	Α
EF70-200mm f/2.8L IS II USM	
+ Extender EF1.4x	С
EF70-200mm f/2.8L IS II USM	
+ Extender EF2x	E
EF70-200mm f/4L USM	С
EF70-200mm f/4L USM	0
+ Extender EF1.4x	E
T LAGRICO LI 1.4A	L

EF70-200mm f/4L USM + Extender EF2x	H (f/8)
EF70-200mm f/4L IS USM	С
EF70-200mm f/4L IS USM	
+ Extender EF1.4x	E
EF70-200mm f/4L IS USM + Extender EF2x	H (f/8)
EF70-210mm f/3.5-4.5 USM	F
EF70-210mm f/4	C
EF70-300mm f/4-5.6 IS USM	E
EF70-300mm f/4-5.6L IS USM	E
EF70-300mm f/4.5-5.6 DO IS USM	F
EF75-300mm f/4-5.6	E
EF75-300mm f/4-5.6 USM	E
EF75-300mm f/4-5.6 II	E
EF75-300mm f/4-5.6 II USM	E
	E
EF75-300mm f/4-5.6 III	_
EF75-300mm f/4-5.6 III USM	E
EF75-300mm f/4-5.6 IS USM	E
EF80-200mm f/2.8L	A
EF80-200mm f/4.5-5.6	E
EF80-200mm f/4.5-5.6 USM	F
EF80-200mm f/4.5-5.6 II	F
EF90-300mm f/4.5-5.6	E
EF90-300mm f/4.5-5.6 USM	E
EF100-200mm f/4.5A	E
EF100-300mm f/4.5-5.6 USM	E
EF100-300mm f/5.6	Е
EF100-300mm f/5.6L	Е
EF100-400mm f/4.5-5.6L IS USM	E
EF100-400mm f/4.5-5.6L IS USM	11 (4(0)
+ Extender EF1.4x	H (f/8)
EF100-400mm f/4.5-5.6L IS II USM	E
EF100-400mm f/4.5-5.6L IS II USM + Extender EF1.4x	H (f/8)
EF200-400mm f/4L IS USM Extender	1
1.4x	
EF200-400mm f/4L IS USM Extender 1.4x: With built-in Ext. 1.4x	E
EF200-400mm f/4L IS USM Extender 1.4x + Extender EF1.4x	Е
EF200-400mm f/4L IS USM Extender	
1.4x: With built-in Ext. 1.4x + Extender EF1.4x	H (f/8)
EF200-400mm f/4L IS USM Extender	-
1.4x + Extender EF2x	H (f/8)

TS-E17mm f/4L	С
TS-E24mm f/3.5L	С
TS-E24mm f/3.5L II	С
TS-E45mm f/2.8	Α
TS-E90mm f/2.8	Α



When using a lens and an extender in the combination marked with *, precise focus may not be achieved with AF. Refer to the instruction manual of the lens or extender used



- Both "Extender EF1.4x" and "Extender EF2x" apply to all the I/II/III models (under this grouping).
- If you use a TS-E lens, manual focusing will be required. The lens group designation of TS-E lenses applies only when you do not use tilt or shift function.

MENU Selecting Al Servo AF Characteristics ★

You can easily fine-tune AI Servo AF to suit a particular subject or shooting scene just by selecting an option from case 1 to case 6. This feature is called the "AF Configuration Tool."



Select the [AF1] tab.

Select a case.

- Turn the < > dial to select a case icon, then press < (sī) >.
- ➤ The selected case will be set. The selected case is indicated in blue.

Case 1 to 6

As explained on pages 114 to 116, case 1 to 6 are six setting combinations of "Tracking sensitivity", "Acceleration/deceleration tracking", and "AF point auto switching". Refer to the table below to select the case applicable to the subject or shooting scene.

Case	Icon	Description	Applicable Subjects	Page
Case 1	1300	Versatile multi purpose setting	For any moving subject.	110
Case 2	ጱ	Continue to track subjects, ignoring possible obstacles	Tennis players, butterfly swimmers, freestyle skiers, etc.	110
Case 3	ŊŎĨ	Instantly focus on subjects suddenly entering AF points	Starting line of a bicycle race, alpine downhill skiers, etc.	111
Case 4	疒	For subjects that accelerate or decelerate quickly	Soccer, motor sports, basketball, etc.	111
Case 5	ř	For erratic subjects moving quickly in any direction	Figure skaters, etc.	112
Case 6	Ť	For subjects that change speed and move erratically	Rhythm gymnastics, etc.	113

Case 1: Versatile multi purpose setting



Default settings

- · Tracking sensitivity: 0
- · Accel./decel. tracking: 0
- AF pt auto switching: 0

Standard setting suited for any moving subject. Works with many subjects and scenes.

Select [Case 2] to [Case 6] for the following: When an obstacle cuts across the AF points or the subject tends to stray from the AF points, when you want to focus on a subject appearing suddenly, when the speed of a moving subject changes suddenly, or when the subject dramatically moves horizontally or vertically.

Case 2: Continue to track subjects, ignoring possible obstacles



Default settings

- Tracking sensitivity: Locked on: -1
- · Accel./decel. tracking: 0
- AF pt auto switching: 0

The camera will try to continue focusing on the subject even if an obstacle enters the AF points or if the subject stravs from the AF points. Effective when there may be an obstacle blocking the subject or when you do not want to focus on the background.



If an obstacle gets in the way or if the subject moves away from the AF points for a prolonged period and the default setting is unable to track the target subject, setting [Tracking sensitivity] to [-2] may give better results (p.114).

Case 3: Instantly focus on subjects suddenly entering AF points



Default settings

· Tracking sensitivity: Responsive: +1

· Accel./decel. tracking: +1

· AF pt auto switching: 0

Once an AF point starts tracking the subject, this setting enables the camera to consecutively focus on subjects at different distances. If a new subject appears in front of the target subject, the camera will start focusing on the new subject. Also effective when you want to always focus on the closest subject.



If you want to quickly focus on a subject appearing suddenly, setting [Tracking sensitivity] to [+2] may give better results (p.114).

Case 4: For subjects that accelerate or decelerate quickly



Default settings

Tracking sensitivity: 0

· Accel./decel. tracking: +1

· AF pt auto switching: 0

Geared for tracking moving subjects whose speed can change dramatically and suddenly.

Effective for subjects having sudden movements, sudden acceleration. sudden deceleration, or sudden stops.



If the subject is in motion, and prone to sudden, dramatic changes in speed, setting [Accel./decel. tracking] to [+2] may give better results (p.115).

Case 5: For erratic subjects moving quickly in any direction



Default settings

- · Tracking sensitivity: 0
- · Accel./decel. tracking: 0
- AF pt auto switching: +1

Even if the target subject moves dramatically up, down, left, or right, the AF point will switch automatically to focus-track the subject. Effective for shooting subjects that move dramatically up. down. left. or right.

It is recommended to use this setting with the following modes; AF point expansion (manual selection "."), AF point expansion (manual selection, surrounding points), Zone AF (manual selection of zone), and 61-point automatic selection AF

With Single-point Spot AF (manual selection) or Single-point AF (manual selection) mode, the tracking action will be the same as with Case 1.



If the subject moves even more dramatically up, down, left, or right, setting [AF pt auto switching] to [+2] may give better results (p.116).

Case 6: For subjects that change speed and move erratically



Default settings

- · Tracking sensitivity: 0
- · Accel./decel. tracking: +1
- · AF pt auto switching: +1

Geared for tracking moving subjects whose speed can change dramatically and suddenly. Also, if the target subject moves dramatically up, down, left or right and it is difficult to focus, the AF point switches automatically to track the subject.

It is recommended to use this setting with the following modes; AF point expansion (manual selection "\(\bar{n}\)" o), AF point expansion (manual selection, surrounding points), Zone AF (manual selection of zone), and 61-point automatic selection AF.

With Single-point Spot AF (manual selection) or Single-point AF (manual selection) mode, the tracking action will be the same as with Case 4.



- If the subject is in motion, and prone to sudden, dramatic changes in speed, setting [Accel./decel. tracking] to [+2] may give better results (p.115).
- If the subject moves even more dramatically up, down, left, or right, setting [AF pt auto switching] to [+2] may give better results (p.116).

Parameters

Tracking sensitivity



Sets the subject-tracking sensitivity during Al Servo AF when an obstacle enters the AF points or when the AF points stray from the subject.

0

Default setting. Suitable for moving subjects in general.

Locked on: -2 / Locked on: -1

The camera will try to continue focusing on the subject even if an obstacle enters the AF points or if the subject strays from the AF points. The -2 setting makes the camera track the target subject longer than with the -1 setting.

However, if the camera focuses on a wrong subject, it may take slightly longer to switch and focus on the target subject.

Responsive: +2 / Responsive: +1

The camera can focus consecutively on subjects at different distances that are covered by the AF points. Also effective when you want to always focus on the closest subject. The +2 setting is more responsive when focusing on the next subject than +1.

However, the camera will be more prone to focus on the wrong subject.



Tracking sensitivity] is the feature named [Al Servo tracking sensitivity] in the EOS-1D Mark III/IV, EOS-1Ds Mark III, and EOS 7D.

Acceleration/deceleration tracking



This sets the tracking sensitivity for moving subjects whose speed can suddenly change dramatically by starting or stopping suddenly, etc.

0

Suited for subjects that move at a steady speed (minimal change in moving speed).

+2 / +1

Effective for subjects having sudden movements, sudden acceleration/deceleration, or sudden stops. Even if the moving subject's speed suddenly changes dramatically, the camera continues to focus on the target subject. For example, for an approaching subject, the camera becomes less prone to focus behind it to avoid subject blur. For a subject stopping suddenly, the camera becomes less prone to focus in front of it. Setting +2 can track dramatic changes in the moving subject's speed better than with +1.

However, since the camera will be sensitive even to the slight movements of the subject, the focusing may momentarily become unstable.

AF point auto switching



This sets the switching sensitivity of the AF points as they track the subject moving dramatically up, down, left, or right.

This setting takes effect when the AF area selection mode is set to AF point expansion (manual selection """), AF point expansion (manual selection, surrounding points), Zone AF (manual selection of zone), or 61-point automatic selection AF.

Star +2 / +1

0

Standard setting for gradual AF point switching.

Even if the target subject moves dramatically up, down, left, or right and moves away from the AF point, the camera switches its focus to neighboring AF points to continue focusing on the subject. The camera switches to the AF point deemed most likely to focus on the subject based on the subject's continual movement, contrast, etc. Setting +2 makes the camera more prone to switch the AF point than with +1.

However, with a wide-angle lens having a wide depth of field or if the subject is too small in the frame, the camera may focus with the wrong AF point.

Changing Cases' Parameter Settings

You can manually adjust each case's three parameters: 1. Tracking sensitivity, 2. Acceleration/deceleration tracking, and 3. AF point auto switching.









Select a case.

Turn the < >> dial to select the icon of the case you want to adjust.

Press the <RATE> button.

The selected parameter will have a purple frame.

Select the parameter to adjust.

- Select the parameter to adjust, then press < (SET) >.
- When Tracking sensitivity is selected, the setting screen will appear.


Make the adjustment.

- Adjust the setting, then press < (SET) >.
- The adjustment is saved.
- The default setting is indicated by the light gray [] mark.
- To return to the screen in step 1. press the <RATE> button.



- In step 2, if you press the <RATE> button and then press the <m>> button, you can revert the 1, 2 and 3 parameter settings above for each case.
- You can also register the 1, 2, and 3 parameter settings to My Menu (p.432). Doing so will change the selected case's settings.
- When shooting with a case whose parameters you adjusted, select the adjusted case and then take the picture.

MENU Customizing AF Functions ★



With the [AF2] to [AF5] menu tabs, you can set the AF functions to suit your shooting style or subject.

AF2: Al Servo

Al Servo 1st image priority

You can set the AF operation characteristics and shutter-release timing for the first shot with AI Servo AF.



□/⑨: Equal priority

Equal priority is given to focusing and shutter release

□: Release priority

Pressing the shutter button takes the picture immediately even if focus has not been achieved. It is effective when you want to give priority to capturing the image rather than achieving focus.

: Focus priority

Pressing the shutter button does not take the picture until focus is achieved. Effective when you want to achieve focus before capturing the image.

Al Servo 2nd image priority

You can set the AF operation characteristics and shutter-release timing during continuous shooting after the first shot with Al Servo AF.



□/⑨: Equal priority

Equal priority is given to focusing and continuous shooting speed. In low light or with low-contrast subjects. shooting speed may slow down.

□: Shooting speed priority

Priority is given to the continuous shooting speed instead of achieving focus.

: Focus priority

Priority is given to achieving focus instead of the continuous shooting speed. The picture will not be taken until focus is achieved.



Under shooting conditions which activate anti-flicker shooting (p.191), even if [Shooting speed priority] is set, the continuous shooting speed may become slightly slower or the shooting interval may become irregular.

AF3: One Shot

Lens electronic MF

With the following USM and STM lenses equipped with an electronic manual focusing function, you can set whether to use electronic manual focusing.

EF50mm f/1.0L USM	EF300mm f/2.8L USM	EF600mm f/4L USM
EF85mm f/1.2L USM	EF400mm f/2.8L USM	EF1200mm f/5.6L USM
EF85mm f/1.2L II USM	EF400mm f/2.8L II USM	EF28-80mm f/2.8-4L USM
EF200mm f/1.8L USM	EF500mm f/4.5L USM	
		•

EF24-105mm f/3.5-5.6 IS STM

^{*} As of March 2015



●→○N: Enable after One-Shot AF

After AF operates, if you keep pressing the shutter button halfway, you can adjust the focus manually.

●+0FF: Disable after One-Shot AF

After AF operates, manual focusing adjustment is disabled.

OFF: Disable in AF mode

When the lens's focus mode switch is set to <AF>, manual focusing is disabled.

AF-assist beam firing

Enables or disables the AF-assist beam from the FOS-dedicated external Speedlite.



ON: Enable

The external Speedlite emits the AFassist beam when necessary.

OFF: Disable

The external Speedlite will not emit the AF-assist beam. Prevents the AFassist beam from disturbing others.

IR: IR AF assist beam only

When an external Speedlite is attached, only the infrared AF-assist beam will be emitted. This prevents the AF-assist light from firing as a burst of small flashes.

With an EX-series Speedlite equipped with an LED light, the LED light will not automatically turn on for AF-assist.



If an external Speedlite's [AF-assist beam firing] Custom Function is set to [Disabled], the Speedlite will not emit the AF-assist beam regardless of this settina.

One-Shot AF release priority

You can set the AF operation characteristics and shutter-release timing for One-Shot AF.



: Focus priority

The picture will not be taken until focus is achieved. Effective when you want to achieve focus before capturing the shot.

□: Release priority

Priority is given to the timing of shutter release instead of achieving focus. This gives priority to capturing the image rather than achieving correct focus.

Note that the picture will be taken even if focus has not been achieved.

AF4

Lens drive when AF impossible

If focus cannot be achieved with autofocus, you can have the camera keep searching for the correct focus or have it stop searching.



ON: Continue focus search

If focus cannot be achieved with autofocus, the lens is driven to search for the correct focus.

OFF: Stop focus search

If autofocus starts and the focus is far off or if focus cannot be achieved, the lens drive will not be performed. This prevents the lens from becoming grossly out of focus due to focus searching.

Super telephoto lenses, etc., with a wide focusing drive range can become grossly out of focus during focus search, taking more time to achieve focus next time. Setting [Stop focus search] is recommended.

Selectable AF point

You can change the number of manually selectable AF points. If 61point automatic selection AF is set, the Area AF frame (entire AF area) will be used for AF regardless of the setting below.



: 61 points

All AF points will be manually selectable.

IIII: Only cross-type AF points

Only cross-type AF points will be manually selectable. The number of selectable cross-type AF points will differ depending on the lens.

Fifteen major AF points will be manually selectable.

::::: 9 points

Nine major AF points will be manually selectable.



With a lens from Groups F to H (p.103-104), the number of manually selectable AF points will be fewer.



- Even with settings other than [61 points], AF point expansion (manual selection "", AF point expansion (manual selection, surrounding points) and Zone AF (manual selection of zone) are still possible.
- When you press the < ==> button, the AF points which are not manually selectable will not be displayed in the viewfinder.

Select AF area selection mode

You can limit the selectable AF area selection modes to suit your shooting preferences. Select the desired selection mode and press <
⊕> to append a checkmark <√>. Then select [OK] to register the setting.



: Manual select.:Spot AF

For pinpoint focusing with a narrower area than single-point AF (manual selection).

□: Manual selection:1 pt AF

One of the AF points set by [Selectable AF point] setting can be selected.

The camera will focus with the manually-selected AF point and the adjacent AF points (above, below, on the left, and on the right).

🚟: Expand AF area:Surround

The camera will focus with the manually-selected AF point and the surrounding AF points.

The AF area is divided into nine focusing zones for focusing.

(): Auto selection:61 pt AF

The Area AF frame (entire AF area) is used for focusing.



- The <√> mark cannot be removed from [Manual selection:1 pt AF].
- If the attached lens belongs to group H (p.104), you can only select [Manual select.:Spot AF], [Manual selection:1 pt AF], and [Expand AF area: "\(\hat{q}\).

AF area selection method

You can set the method for changing the AF area selection mode.



Min: □ → M-Fn button

After you press the < : > button. pressing the <M-Fn> button, the AF area selection mode changes.

After you press the <ा > button. turning the < > dial changes the AF area selection mode.



When [→ Main Dial] is set, use the < > to move the AF point horizontally.

Orientation linked AF point

You can set the AF point or the AF area selection mode + AF point separately for vertical shooting and horizontal shooting.



: Same for both vert/horiz

The same AF area selection mode and manually-selected AF point (or zone) are used for both vertical shooting and horizontal shooting.

⊡: Separate AF pts: Area+pt

The AF area selection mode and AF point (or zone) can be set separately for each camera orientation (1. Horizontal, 2. Vertical with the camera grip at the top, 3. Vertical with the camera grip at the bottom).

When you manually select the AF area selection mode and AF point (or zone) for each of the three camera orientations, they will be set for the respective orientation. Whenever you change the camera orientation during shooting, the camera will switch to the AF area selection mode and manually-selected AF point (or zone) set for that orientation.

The AF point can be set separately for each camera orientation (1. Horizontal, 2. Vertical with the camera grip at the top, 3. Vertical with the camera grip at the bottom). While using the same AF area selection mode, the AF point will switch automatically for the respective camera orientation.

When you manually select the AF point for each of the three camera orientations, it will be recorded for the respective orientation. During shooting, the manually-selected AF point will switch to match the respective camera orientation. Even if you change the AF area selection mode to Manual select.:Spot AF, Manual selection:1 pt AF, Expand AF area: "

"", or Expand AF area: Surround, the AF point set for the respective orientation will be retained.

If you change the AF area selection mode to Zone AF (manual selection of zone), the zone will switch to match the respective camera orientation.



- If you clear the camera settings to their defaults (p.70), the setting will be [Same for both vert/horiz]. Also, your settings for the three camera orientations (1, 2 and 3) will be cleared and all three will revert to Singlepoint AF (Manual selection) with the center AF point selected.
- If you set this and later attach a lens from a different AF group (p.100-104, particularly Group H), the setting may be cleared.

Initial AF Point, (3) Al Servo AF

You can set the Al Servo AF's starting AF point for when the AF area selection mode is set to Auto selection: 61 pt AF.



(3): Initial (3) AF pt selected

Al Servo AF will start with the manually-selected AF point when the AF operation is set to AI Servo AF and the AF area selection mode is set to Auto selection: 61 pt AF.

If you switch from Manual select.: Spot AF, Manual selection: 1 pt AF, Expand AF area: "", or Expand AF area: Surround to Auto selection: 61 pt AF. Al Servo AF will start with the AF point that was manually selected before the switch. Convenient if you want Al Servo AF to start with the AF point which was selected before the AF area selection mode was switched to Auto selection: 61 pt AF. After you set the AF area selection mode to Auto selection: 61 pt AF with the [.a.3: Custom Controls] menu's [Metering and AF start] (p.418), [Switch to registered AF func.] (p.420), or [Register/ recall shooting func] (p.425), you can press the assigned button during Manual select: Spot AF. Manual selection: 1 pt AF. Expand using Auto selection: 61 pt AF instead of the AF point used immediately before.

AUTO: Auto

The AF point which AI Servo AF starts with is set automatically to suit the shooting conditions.



When [Manual

AF pt] is set, Al Servo AF will start with the zone that corresponds to the manually selected AF point, even if you switch AF area selection mode to Zone AF (manual selection of zone).

Auto AF point selection: EOS iTR AF

EOS iTR* AF executes autofocus by recognizing faces and subject colors. EOS iTR AF works when the AF area selection mode is set to 61-point automatic selection AF or Zone AF (manual selection of zone).

* intelligent Tracking and Recognition: The function that the metering sensor identifies the subject to make the AF points tracking it.



ON: Enable

The AF point is automatically selected based not only on AF information, but also faces and other details.

In AI Servo AF mode, the camera remembers the color at the position it focused on first, then continues to track and focus on the subject by switching AF points to track that color. This makes it easier to keep track of the subject than when only AF information is available. In One-Shot AF mode, EOS iTR AF makes focusing on people easier, so you can perform shooting with priority on composition.

OFF: Disable

AF points are automatically selected based only on AF information. (The AF will not use information about faces, subject colors and other details.)



- If [Enable] is set, the camera may take longer to focus than when [Disable] is set.
- Even if you set [Enable], expected result may not be obtained depending on the shooting conditions and subject.
- Under light so low that the EOS-dedicated, external Speedlite emits the AF-assist beam automatically, AF points are selected automatically based only on AF information.
- Face detection may not work if the face is small or under low-light conditions.

AF5

Manual AF point selection pattern

During manual AF point selection, the selection can either stop at the outer edge or it can cycle around to the opposite side. This function works in AF area selection modes other than Zone AF (manual selection of zone), and 61-point automatic selection AF (works with AI Servo AF).



tious at AF area edges

Convenient if you often use an AF point at the periphery.

:...: Continuous

Instead of stopping at the outer edge, the selection of AF point continues to the opposite side.

AF point display during focus

You can set whether or not to display the AF point(s) in the following cases: 1. When selecting the AF point(s), 2. When the camera is ready to shoot (before AF operation), 3. During AF operation, and 4. When focus is achieved.



:: Selected (constant)

The selected AF point(s) is always displayed.

III : All (constant)

All AF points are always displayed.

:: Selected (pre-AF, focused)

The selected AF point(s) is displayed for 1, 2, and 4.

்டீ: Selected (focused)

The selected AF point(s) is displayed for 1 and 4 and for when AF starts.

OFF: Disable display

For 2, 3, and 4, the selected AF point(s) will not be displayed.

VF display illumination

You can set whether the AF points in the viewfinder are to light up in red when focus is achieved.



AUTO: Auto

The AF points automatically light up in red under low light.

ON: Enable

The AF points light up in red regardless of the ambient light level.

OFF: Disable

The AF points do not light up in red.

With [Auto] or [Enable] set, you can set whether the AF point lights up in red (blink) when you press the <Q> button during Al Servo AF.



OFF: Non illuminated

The AF point will not light up during Al Servo AF

ON: Illuminated

AF points used for focusing light up in red during AI Servo AF. This will not work if [VF display illumination] is set to [Disable].



- The electronic level and grid in the viewfinder and the information set with [Show/hide in viewfinder] (p.77) will also light up in red.

AF Microadjustment

You can make fine adjustments for the AF's point of focus. For details, see "Fine Adjustment of AF's Point of Focus" on the next page.

MENU Fine Adjustment of AF's Point of Focus ★

Fine adjustment of the AF's point of focus is possible for viewfinder shooting. This is called "AF Microadjustment". Before making the adjustment, read "General Cautions for AF Microadjustment" on page 139




Cautions for AF Microadjustment

Normally, this adjustment is not required. Perform this adjustment only if necessary. Note that performing this adjustment may prevent accurate focusing from being achieved.

Adjust All by Same Amount

Set the adjustment manually by adjusting, shooting, and checking the result. Repeat this until appropriate adjustment is made. During AF. regardless of the lens used, the point of focus will always be shifted by the adjustment amount.





Under the [AF5] tab. select [AF Microadjustment], then press < (SET) >.



Select [All by same amount].

- Press the <INFO.> button.
 - The [All by same amount] screen will appear.





Make the adjustment.

- Set the adjustment amount. The adjustable range is ±20 steps.
- Setting it toward "-: "" will shift the point of focus in front of the standard point of focus.
- Setting it toward "+: \(\textit{\textit{\textit{\textit{M}}}} \) will shift the point of focus to the rear of the standard point of focus.
- After making the adjustment, press
 (sr)>.
- Select [All by same amount], then press < (ET) >.

Check the result of the adjustment.

- Take a picture and play back the image (p.320) to check the adjustment result.
- If the shooting result comes out with focus in front of the targeted point, adjust toward the "+: ▲ " side. If it comes out with focus behind the targeted point, adjust toward the "-: ♣" " side.
 - If necessary, repeat the adjustment.

If [All by same amount] is selected, separate AF adjustment will not be possible for the wide-angle and telephoto ends of zoom lenses.

Adjust by Lens

You can make the adjustment for each lens and register the adjustment in the camera. You can register the adjustment for up to 40 lenses. When you autofocus with a lens whose adjustment is registered, the point of focus will always be shifted by the adjustment amount. Set the adjustment manually by adjusting, shooting, and checking the result. Repeat this until the desired adjustment is made. If you use a zoom lens, make the adjustment for the wide-angle (W) and telephoto (T) ends.









Press the <INFO.> button.

The [Adjust by lens] screen will appear.

Check and change the lens information.

Checking the Lens Information.

- Press the < INFO. > button.
- The screen will show the lens name and a 10-digit serial number. When the serial number is displayed, select [OK] and go to step 4.
- If the lens's serial number cannot be confirmed, "0000000000" will be displayed. In this case, enter the number by following the instructions on the next page.
- Regarding the asterisk " * " displayed in front of some lens serial numbers, see the next page.



Entering the Serial Number

- Select the digit to be entered, then press < (□) > so < □) > is displayed.
- Enter the number, then press < (\$\sum{\subset}\$)>.
- After entering all the digits, select [OK].

Lens Serial Number

- In step 3, if "*" appears in front of the 10-digit lens serial number, you can register only one unit of the same lens model.
 Even if you enter the serial number, "*" will remain displayed.
- The serial number on the lens may differ from the serial number displayed on the screen in step 3. This is not a malfunction.
- If the lens serial number includes letters, enter only the numbers.
- If the lens serial number is eleven digits or longer, enter only the last ten digits.
- The location of the serial number varies depending on the lens.
- Some lenses may not have a serial number inscribed. To register a lens that has no serial number inscribed, enter any serial number.



- If [Adjust by lens] is selected and an Extender is used, the adjustment will be registered for the lens and Extender combination.
- If 40 lenses have already been registered, a message will appear. After you select a lens whose registration is to be erased (overwritten), you can register another lens.

Single focal length lens



Zoom lens





Make the adjustment.

- For a zoom lens, select the wide-angle (W) or telephoto (T) end. Pressing
 (s) will turn off the purple frame and make the adjustment possible.
- Set the adjustment amount, then press <(x)>. The adjustable range is ±20 steps.
- Setting it toward "-:
 [™] " will shift the point of focus in front of the standard point of focus.
- Setting it toward "+: \(\textit{\textit{\textit{\textit{m}}}} \) will shift the point of focus to the rear of the standard point of focus.
- For a zoom lens, repeat this procedure and adjust it for the wideangle (W) and telephoto (T) ends.
 - After completing the adjustment, press the <MENU> button to return to the screen in step 1.
- Select [Adjust by lens], then press
 (ser)>.

Check the result of the adjustment.

- Take a picture and play back the image (p.320) to check the adjustment result.
- If the shooting result comes out with focus in front of the targeted point, adjust toward the "+: ▲ " side. If it comes out with focus behind the targeted point, adjust toward the "-: ♣" side.
- If necessary, repeat the adjustment.



When shooting with the intermediate range (focal length) of a zoom lens, the AF's point of focus is corrected automatically relative to the adjustments made for the wide-angle and telephoto ends. Even if only the wide-angle or telephoto end is adjusted, a correction will be made automatically for the intermediate range.

Clearing All AF Microadiustments

When [Clear all appears at the bottom of the screen, pressing the <前> button will clear all the adjustments made for [All by same amount] and [Adjust by lens].



General Cautions for AF Microadjustment

- The AF's point of focus will vary slightly depending on the subject conditions, brightness, zoom position, and other shooting conditions. Therefore, even if you perform AF Microadjustment, focus may still not be achieved at the suitable position.
- The adjustment amount of one stop varies depending on the maximum aperture of the lens. Keep adjusting, shooting, and checking the focus repeatedly to adjust the AF's point of focus.
- The adjustment will not be applied to AF during Live View shooting or movie shooting.
- The adjustments will be retained even if you clear all the camera settings (p.70). However, the setting itself will be [Disable].



Notes for AF Microadjustment

- It is best to make the adjustment at the actual location where you will shoot. This will make the adjustment more precise.
- Using a tripod when making the adjustment is recommended.
- For making adjustments, shooting at the \(\bigs L \) image-recording quality is recommended.

When Autofocus Fails

Autofocus can fail to achieve focus (viewfinder's focus indicator < >> blinks) with certain subjects such as the following:

Subjects Difficult to Focus

- Subjects with very low contrast (Example: Blue skies, solid-color flat surfaces, etc.)
- Subjects in very low light
- Strongly backlit or reflective subjects (Example: Cars with highly reflective bodies, etc.)
- Near and distant subjects framed close to an AF point (Example: Animals in cages, etc.)
- Subjects such as dots of light framed close to an AF point (Example: Night scenes, etc.)
- Repetitive patterns (Example: Skyscraper windows, computer keyboards, etc.)


In such cases, focus by doing either of the following:

- (1) With One-Shot AF, focus on an object at the same distance as the subject and lock the focus, then recompose the shot (p.83).
- (2) Set the lens's focus mode switch to <MF> and focus manually (p.141).



- Depending on the subject, focus may be achieved by slightly recomposing the shot and performing AF operation again.
- For conditions where AF can fail to achieve focus with ['L'+Tracking]/
 [FlexiZone Single] during Live View shooting or movie shooting, see
 page 273.

MF: Manual Focus



Focusing ring



Set the lens's focus mode switch to <MF>.

<M FOCUS> will be displayed on the LCD panel.

Focus on the subject.

 Focus by turning the lens's focusing ring until the subject looks sharp in the viewfinder.




- If you press the shutter button halfway while focusing manually, the focus indicator <●> will light up when focus is achieved.
- With 61-point automatic selection AF, when the center AF point achieves focus, the focus indicator < > will light up.

□н Selecting the Drive Mode

Single and continuous drive modes are provided. You can select the drive mode suiting the scene or subject.



¶ Press the <DRIVE•AF > button. (♠6)



Select the drive mode.

 While looking at the LCD panel or in the viewfinder, turn the <>> dial.

☐ : Single shooting

When you press the shutter button completely, only one shot will be taken.

□H: High-speed continuous shooting

While you hold down the shutter button completely, the camera will shoot continuously at a **maximum of approx. 5.0 shots/sec.**

: Low-speed continuous shooting

While you hold down the shutter button completely, the camera will shoot continuously at a **maximum of approx. 3.0 shots/sec.**

□S: Silent single shooting

Single shooting with less shooting sound than <□> during viewfinder shooting.

□S: Silent continuous shooting

Continuous shooting with less shooting sound than <□> during viewfinder shooting. The camera will shoot continuously at a maximum of approx. 3.0 shots/sec.

During Live View shooting and movie shooting, shooting will not be silent even if <□\$> or <□\$> is set. ີ່ ຽ່ : 10-sec. self-timer/remote control ເປັ່ງ: 2-sec. self-timer/remote control

For self-timer shooting, see page 144. For remote control shooting, see page 237.




- ■H: The maximum continuous shooting speed of approx. 5.0 shots/sec. is attained under the following conditions*: 1/500 sec. or faster shutter speed, maximum aperture (varies depending on the lens), Anti-flicker shooting set to Disable, with a fully-charged Battery Pack LP-E6N, and at room temperature (23°C/73°F). The continuous shooting speed may become slower depending on the shutter speed, aperture, subject conditions, brightness, lens, flash use, temperature, battery type, remaining battery level, etc.
 - * With the AF mode set to One-Shot AF and the Image Stabilizer turned off when using the following lenses: EF300mm f/4L IS USM, EF28-135mm f/3.5-5.6 IS USM, EF75-300mm f/4-5.6 IS USM, EF100-400mm f/4.5-5.6L IS USM.
- In Al Servo AF operation, the continuous shooting speed may become slower depending on the subject and the lens used.
- If you use Battery Pack LP-E6 and shoot in low temperatures (battery temperature is low), the high-speed continuous shooting speed may become slower
- The continuous shooting speed may become slower if the remaining battery level is low or if you shoot under low-light conditions.
- If you use Battery Grip BG-E11 (sold separately) with AA/R6 batteries, the maximum continuous shooting speed will be approx. 3.0 fps for highspeed continuous shooting.
- If <□\$> or <□\$> is set, the time lag from when you press the shutter button completely until the picture is shot will be longer than standard.
- If the [¥1: Record func+card/folder sel.] menu's [Record func.] is set to [Rec. separately] (p.146) and the recording quality setting for the CF card [1] and SD card [2] is different, the maximum burst (p.151) will decrease.
- When internal memory becomes full during continuous shooting, the continuous shooting speed may drop during shooting since shooting will be temporally disabled (p.153).

🖒 Using the Self-timer

Use the self-timer when you want to be in the picture.







Press the <DRIVE•AF> button. (७६)

Select the self-timer.

• While looking at the LCD panel or in the viewfinder, turn the <>> dial.

[७] : 10-sec. self-timer [७] : 2-sec. self-timer

Take the picture.

- Look through the viewfinder, focus on the subject, then press the shutter button completely.
- You can check the self-timer operation with the self-timer lamp, beeper, and countdown display (in seconds) on the LCD panel.
- 2 sec. before the picture is taken, the self-timer lamp will light up and the beeper will sound faster.



If you do not look through the viewfinder when you press the shutter button, attach the eyepiece cover (p.236). If stray light enters the viewfinder when the picture is taken, it may throw off the exposure.



- The <[↑] ᠔₂> enables you to shoot while not touching the camera mounted on a tripod. This prevents camera shake when you shoot still lifes or long exposures.
- After taking self-timer shots, playing back the image (p.320) to check focus and exposure is recommended.
- When using the self-timer to shoot yourself, use focus lock (p.83) on an object at the same distance as where you will stand.
- To cancel the self-timer, press the <DRIVE•AF > button.

4

Image Settings

This chapter explains image-related function settings: Image-recording quality, Crop/aspect, ISO speed, Picture Style, white balance, Auto Lighting Optimizer, noise reduction, highlight tone priority, lens aberration correction, anti-flicker shooting, and other functions.

 A ☆ icon at the upper right of a page title indicates a function that can be used only in the following modes: <P><Tv><Av><M>.

MENU Selecting the Card for Recording and Playback

If either a CF card or SD card is already inserted in the camera, you can start recording captured images. When only one card is inserted, you do not have to follow the procedures described on pages 146-148.

If you insert both a CF card and SD card, you can select the recording method and select which card to use for recording and playing back images.

[1] indicates the CF card, and [2] the SD card.

Recording Method with Two Cards Inserted



- Select [Record func+card/folder sel.].
 - Under the [¥1] tab, select [Record func+card/folder sel.], then press <⊕>.



Select [Record func.].



- Select the recording method.
 - Select the recording method, then press < (ET) >.

Standard

Images will be recorded to the card selected with [Record/play].

Auto switch card

Same as with the [Standard] setting, but if the card becomes full, the camera will automatically switch to the other card to record images. When the card is automatically switched, a new folder will be created

Rec. separately

You can set the image-recording quality for each card (p.149). Each image is recorded to both the CF and SD cards at the imagerecording quality you set. You can freely set the image-recording quality, such as to **L** and **RAW**, or **S3** and **M RAW**.

Rec. to multiple

Each image is recorded to both the CF and SD cards simultaneously at the same image size. You can also select RAW+JPEG.



- If [Rec. separately] is set and different recording qualities are set for the CF card and SD card, the maximum burst for continuous shooting will decrease (p.151).
- Even if [Record func.] is set to [Rec. to multiple], movies cannot be recorded to both the CF card and SD card at the same time. If [Rec. separately] or [Rec. to multiple] is set, the movie will be recorded to the card which is set for [Playback].

[Rec. separately] and [Rec. to multiple]

- The same file number is used for recording to both the CF card and SD card.
- The LCD panel will display the number of possible shots of the card having the lower number.
- If one of the cards becomes full, [Card* full] will be displayed and shooting will be disabled. If this happens, either replace the card or set [Record func.] to [Standard] or [Auto switch card], and select the card with remaining capacity to continue shooting.

Selecting the CF or SD Card for Recording and Playback

If [Record func.] is set to [Standard] or [Auto switch card], select the card for recording and playing back images.

If [Record func.] is set to [Rec. separately] or [Rec. to multiple], select the card for playing back images.

Standard / Auto switch card



Select [Record/play].

- Select [Record/play], then press <(st)>.
 - : Record images to and play images back from the CF card.
 - Record images to and play images back from the SD card.
- Select the card, then press < (\$\mathbb{E}\mathbf{T}\$)>.

Rec. separately / Rec. to multiple




Select [Playback].

- Select [Playback], then press < (ET)>.
 - 1: Play back the CF card's images.
 - 2 : Play back the SD card's images.
- Select the card, then press < (SET) >.

MENU Setting the Image-Recording Quality

You can select the pixel count and the image quality. There are ten JPEG image-recording quality settings: ▲ L, ▲ L, ▲ M1, ▲ M1, ▲ M2, ▲ M2, ▲ S1, ▲ S1, S2, S3. There are three RAW image quality settings:

AW, M AW, S AW (p.152).



Select [Image quality].

Under the [□1] tab, select [Image quality], then press < (€)>.

Standard / Auto switch card / Rec. to multiple



Select the image-recording quality.

- To select a RAW quality, turn the
 > dial. To select a JPEG quality, turn the <
 > dial.
 - On the upper right, the "**M (megapixels) ****x**** number indicates the recorded pixel count, and [***] is the number of possible shots (displayed up to 9999).
- Press < (SET) > to set it.

Rec. separately





- Under [¥1: Record func+card/ folder sel.], if [Record func.] is set to [Rec. separately], select CF card [☐] or SD card [②], then press <(x)>.
- Select the desired image-recording quality, then press < (ET) >.

Image-recording Quality Setting Examples







RAW + ▲ L



S RAW + ■ M1





The image size [*****x*****] and number of possible shots [****] displayed on the Image-recording quality setting screen always apply to the [Full-frame] setting regardless of the [\textit{\Omega}4: Crop/aspect ratio] setting (p.154). The number of possible shots displayed on the LCD panel and Live View shooting screen during shooting is based on the [\textit{\Omega}4: Crop/aspect ratio] setting.



- If [–] is set for both RAW and JPEG, L will be set.
- The number of possible shots will be displayed up to 1999 on the LCD panel.

Guide to Image-Recording Quality Settings (Approx.)

Image Quality		Pixels Recorded	Print Size	File Size (MB)	Possible Shots	Maximum Burst
	4 L	50M	- A1	14.1	510	31 (510)
	₫ L			7.0	1030	1030 (1030)
	■ M1	39M		10.9	660	45 (660)
	■ M1			5.5	1310	1310 (1310)
JPEG	■ M2	22M	A2	7.1	1010	1010 (1010)
JFEG	■ M2	ZZIVI		3.5	2030	2030 (2030)
	4 S1	12M	А3	4.5	1590	1590 (1590)
	■ S1			2.3	3120	3120 (3120)
	S2*1	2.5M	9x13 cm	1.2	5600	5600 (5600)
	S3*2	0.3M	-	0.3	20380	20380 (20380)
	RAW	50M	A1	60.5	100	12 (14)
RAW	M RAW	28M	28M A2	44.0	140	12 (14)
	S RAW	12M	A3	29.8	190	14 (15)
RAW	RAW ▲ L	50M 50M	A1 A1	60.5+14.1	87	12 (12)
+ JPEG	M RAW ■ L	28M 50M	A2 A1	44.0+14.1	110	11 (12)
3. 20	S RAW	12M 50M	A3 A1	29.8+14.1	140	14 (14)

^{*1:} **S2** is suitable for playing back the images on a digital photo frame.

- The file size, possible shots, and maximum burst during continuous shooting are based on Canon's testing standards (Crop/aspect ratio: Full-frame, ISO 100 and Standard Picture Style) using an 8 GB CF card. These figures will vary by the subject, card brand, crop/aspect ratio, ISO speed, Picture Style, Custom Functions, and other settings.
- The maximum burst applies to < □H> high-speed continuous shooting.
 Figures in parentheses apply to an Ultra DMA (UDMA) 7 CF card, based on Canon's testing standards.

^{*2: \$3} is suitable for emailing the image or using it on a Web site.



- Even if you use a UDMA card, the maximum burst indicator remains the same. However, the maximum burst in parentheses on the preceding page will be applied during continuous shooting.
- If you select both RAW and JPEG, the same image will be recorded. simultaneously to the card in both RAW and JPEG at the imagerecording qualities that were set. The two images will be recorded with the same file numbers (file extension: .JPG for JPEG and .CR2 for RAW).
- The image-recording quality icons are as follows: RAW (RAW), M RAW (Normal), L (Large), M (Medium), and S (Small).

RAW Images

A RAW image is raw data output by the image sensor converted to digital data. It is recorded to the card as is, and you can select the quality as follows: RAW, M RAW, or S RAW.

A RAW image can be processed with [1: RAW image processing] (p.364) and saved as a JPEG image. (M RAW and S RAW images cannot be processed with the camera.) As the RAW image itself does not change, you can process the RAW image according to different processing conditions to create any number of JPEG images from it. You can use Digital Photo Professional (EOS software, p.520) to process RAW images. You can make various adjustments as desired and generate a JPEG, TIFF, etc., image incorporating those adjustments.



RAW Image Processing Software

- To display RAW images on a computer, using Digital Photo Professional (DPP, EOS software) is recommended.
- Previous DPP Ver.4.x cannot process RAW images taken with this camera. If your computer has the previous DPP Ver.4.x, update it with the EOS DIGITAL Solution Disk (p.521). (The previous version will be overwritten.) Note that DPP Ver.3.x or earlier cannot process RAW images taken with this camera.
- Commercially-available software may not be able to display RAW images taken with this camera. For compatibility information, contact the software manufacturer.

One-touch Image Quality Setting

With Custom Controls, you can assign the image-recording quality to the <M-Fn> button or depth-of-field preview button so you can switch to it momentarily. If you assign [One-touch image quality setting] or [One-touch image quality (hold)] to the <M-Fn> button or depth-offield preview button, you can guickly switch to the desired imagerecording quality and shoot.

For details, see Custom Controls (p.413).



Under [¥1: Record func+card/folder sel.], if [Record func.] is set to [Rec. separately], you cannot switch to the One-touch image quality setting.

Maximum Burst for Continuous Shooting



The approximate maximum burst is displayed in the viewfinder, Quick Control screen, and on the bottom right of the Custom Quick Control screen. If the maximum burst for continuous shooting is 99 or higher, "99" will be displayed.



The maximum burst is displayed even when a card is not inserted in the camera. Make sure that a card is inserted before taking a picture.



If the maximum burst is displayed as "99", it indicates that you can shoot 99 or more shots continuously. If the maximum burst decreases to 98 or lower and the internal buffer memory becomes full, "buSY" will be displayed in the viewfinder and on the LCD panel. Shooting will then be disabled temporarily. If you stop continuous shooting, the maximum burst will increase. After all the captured images are written to the card, you can resume continuous shooting and shoot up to the maximum burst listed on page 151.

Setting Crop/Aspect Ratio [★]

Normally, images are recorded at the sensor size of approx. 36.0 mm x 24.0 mm (full-frame shooting). You can record only the center of the image magnified approx. 1.3x (equivalent to APS-H size) or approx. 1.6x (equivalent to APS-C size) as if you were using a telephoto lens (crop shooting) or set the desired aspect ratio before you shoot.





 Under the [△4] tab, select [Crop/ aspect ratio], then press <(□)>.



Select the desired setting.

Viewfinder shooting

- Select any of the following: [Full-frame], [1.3x (crop)], [1.6x (crop)], or [1:1 (aspect ratio)].
- If you set [4:3 (aspect ratio)] or [16:9 (aspect ratio)] and use the viewfinder to shoot, the shooting result will be the same as with [Full-frame].

Live View shooting (p.256)

- You can select any setting.
- If you will not change the shooting area display, press < (F) > and go to step 4.



Select the shooting area display.

- With the screen in step 2 displayed, press the < INFO. > button.
- Select either [Masked] or [Outlined], then press <(st)>.

Example settings With □♣・□



With 1:1•□□



With 🕞



With 4:3.



Take the picture.

Viewfinder shooting

- The shooting area in the viewfinder will be masked or have frame lines.
- The area surrounded by the semitransparent masking or frame lines will be recorded as an image.

Live View shooting

- When [1.3x (crop)] or [1.6x (crop)] is set, the displayed image will be magnified by approx. 1.3x or 1.6x respectively.
- Regardless of the [Shooting area] setting, the area shown by the displayed image will be recorded.
- If you select [1:1 (aspect ratio)], [4:3 (aspect ratio)], or [16:9 (aspect ratio)], the area surrounded by the masking or frame lines will be recorded as an image.



- The [12 : Crop/aspect ratio] setting does not work with movie shooting and multiple exposures.
- The 4:3 and 16:9 aspect ratios cannot be used with viewfinder shooting.
- [.\Omega: 3: Add cropping information] can be set only when [Full-frame]
 has been set for Crop/aspect ratio.



- The image coverage with viewfinder shooting will be as follows:
 - With [1.3x (crop)]: Approx. 99% vertical/horizontal coverage.
 - With [1.6x (crop)]: Approx. 98% vertical/horizontal coverage.
 - With [1:1 (aspect ratio)]: Approx. 100% vertical and approx. 99% horizontal coverage.
 - When the image-recording quality is RAW, the image will be recorded in full-frame and the Crop/aspect ratio setting will be appended. During RAW image playback, the shooting area will be indicated by frame lines on the full-frame display. However, in a slide show (p.348), only the shooting area will appear.
- If you use [. . . 3: Custom Controls] to assign [Switch between crop/ aspect] to the <M-Fn> button (p.413), you can press the <M-Fn> button during viewfinder shooting or Live View shooting to switch the Crop/aspect ratio shooting area (p.423).
- During Live View shooting, you can use the Quick Control screen to set [Crop/aspect ratio] (p.263).

Pixels Recorded in Crop/Aspect Ratio Settings

(Approx.)

Image Quality	Full-frame (3:2)	1.3x (crop)	1.6x (crop)
L	8688x5792	6768x4512	5424x3616
	(50.3 megapixels)	(30.5 megapixels)	(19.6 megapixels)
M1	7680x5120	6016x4000*	4800x3200
	(39.3 megapixels)	(24.1 megapixels)	(15.4 megapixels)
M2	5760x3840	4512x3008	3616x2408*
	(22.1 megapixels)	(13.6 megapixels)	(8.7 megapixels)
S1	4320x2880	3376x2256*	2704x1808*
	(12.4 megapixels)	(7.6 megapixels)	(4.9 megapixels)
S2	1920x1280	1920x1280	1920x1280
	(2.5 megapixels)	(2.5 megapixels)	(2.5 megapixels)
\$3	720x480	720x480	720x480
	(350,000 pixels)	(350,000 pixels)	(350,000 pixels)

(Approx.)

Image Quality	1:1 (aspect ratio)	4:3 (aspect ratio)	16:9 (aspect ratio)
L	5792x5792	7712x5792*	8688x4888*
	(33.5 megapixels)	(44.7 megapixels)	(42.5 megapixels)
M1	5120x5120	6816x5120*	7680x4320
	(26.2 megapixels)	(34.9 megapixels)	(33.2 megapixels)
M2	3840x3840	5120x3840	5760x3240
	(14.7 megapixels)	(19.7 megapixels)	(18.7 megapixels)
S1	2880x2880	3840x2880	4320x2432*
	(8.3 megapixels)	(11.1 megapixels)	(10.5 megapixels)
S2	1280x1280	1712x1280*	1920x1080
	(1.6 megapixels)	(2.2 megapixels)	(2.1 megapixels)
\$3	480x480	640x480	720x408*
	(230,000 pixels)	(310,000 pixels)	(290,000 pixels)



- The items marked with an asterisk do not exactly match the indicated aspect ratio.
- For JPEG image file sizes, see the figures for full-frame shooting on page 370. The file size of an image taken with the [□4: Crop/aspect ratio] set will be smaller than an identical image taken with [Full-frame] set.
- The file size and maximum burst of RAW images are the same as those of full-frame shooting. See page 151.

ISO: Setting the ISO Speed*

Set the ISO speed (image sensor's sensitivity to light) to suit the ambient light level. With the $<\Delta^{\dagger}>$ mode selected, the ISO speed will be set automatically (p.160).

Regarding the ISO speed during movie shooting, see pages 283 and 287.



Press the <22·ISO > button. (♦6)



Set the ISO speed.

- While looking at the LCD panel or in the viewfinder, turn the < > dial.
- ISO speed can be set within ISO 100
 ISO 6400 in 1/3-stop increments.
- "A" indicates Auto ISO. The ISO speed will be set automatically (p.160).

ISO Speed Guide

ISO speed	Shooting Situation (No flash)	Flash Range
L, ISO 100 - ISO 400	Sunny outdoors	The birt or the 100
ISO 400 - ISO 1600	Overcast skies or	The higher the ISO speed, the farther the flash range will be.
ISO 1600 - ISO 6400, H	Dark indoors or night	naon rango wiii bo.

^{*} High ISO speeds will result in grainier images.



- As H (equivalent to ISO 12800) is an expanded ISO speed setting, noise (dots of light, banding, etc.) and irregular colors will be more noticeable, and the resolution lower than usual
- As L (equivalent to ISO 50) is an expanded ISO speed setting, the dynamic range will be somewhat narrower than usual.
- If [3: Highlight tone priority] is set to [Enable] (p.187), L (equivalent) to ISO 50), ISO 100/125/160, and H (equivalent to ISO 12800) cannot be selected
- Shooting in high temperatures may result in images that look grainier. Long exposures can also cause irregular colors in the image.
- When you shoot at high ISO speeds, noise (such as dots of light and banding) may become noticeable.
- When shooting in conditions that produce an extreme amount of noise. such as a combination of high ISO speed, high temperature, and long exposure, images may not be recorded properly.
- If you use a high ISO speed and flash to shoot a close subject. overexposure may result.



Under [2: ISO speed settings], you can use [ISO speed range] to expand the settable ISO speed range from L (equivalent to ISO 50) to H (equivalent to ISO 12800) (p.161).

Auto ISO



If the ISO speed is set to "A" (Auto), the actual ISO speed to be set will be displayed when you press the shutter button halfway.

As indicated below, the ISO speed will be set automatically to suit the shooting mode.

Shooting Mode	ISO Speed Setting		
Shooting wode	No Flash	With Flash	
⊑ †	ISO 100 - ISO 3200	ISO 100 - ISO 1600	
P/Tv/Av/M	ISO 100 - ISO 6400*1	ISO 400*1*2*3	
В	ISO 400*1	150 400	

- *1: The actual ISO speed range depends on the [Minimum] and [Maximum] settings set in [Auto ISO range].
- *2: If fill flash will cause overexposure, ISO speed may be reduced, down to a possible minimum of ISO 100 (except in the <**M**> and <**B**> modes).
- *3: In the <**P**> mode, if the external Speedlite is set for bounce flash, ISO 400 ISO 1600 will be set automatically.

MENU Setting the Manually-Settable ISO Speed Range

You can set the manually-settable ISO speed range (minimum and maximum limits). You can set the minimum limit within L (equivalent to ISO 50) to ISO 6400, and the maximum limit within ISO 100 to H (equivalent to ISO 12800).





 Under the [♠2] tab, select [ISO speed settings], then press < (st)>.



Select [ISO speed range].



Set the minimum limit.

- Select the minimum limit box, then press < (ET)>.
- Select the ISO speed, then press
 (ET)>.




Set the maximum limit.

- Select the maximum limit box, then press < (ET)>.
- Select the ISO speed, then press
 (ser)>.
- Select [OK].

MENU Setting the ISO Speed Range for Auto ISO

You can set the automatic ISO speed range for Auto ISO within ISO 100 - ISO 6400. You can set the minimum limit within ISO 100 - ISO 3200, and the maximum limit within ISO 200 - ISO 6400 in 1-stop increments.



Select [Auto ISO range].



Set the minimum limit.

- Select the minimum limit box, then press < (SET) >.
- Select the ISO speed, then press <(SET)>.



Set the maximum limit.

- Select the maximum limit box, then press < (SET) >.
- Select the ISO speed, then press <(SET)>.
- Select [OK].

The [Minimum] and [Maximum] settings will also be applied to the ISO speed safety shift's minimum and maximum ISO speeds (p.405).

MENU Setting the Minimum Shutter Speed for Auto ISO


You can set the minimum shutter speed so that the shutter speed set automatically will not be too slow when Auto ISO is set.

This is convenient in the <**P**> and <**Av**> modes when you use a wideangle lens to shoot a moving subject or when you use a telephoto lens. It helps to reduce camera shake and blurred subjects.



Select [Min. shutter spd.].

Automatically set



Set the desired minimum shutter speed.

- Select [Auto] or [Manual].
- If you select [Auto], turn the < \(\frac{\tag{1}}{\tag{2}} > \) dial to set the desired speed, slower or faster, compared to the standard speed, then press < (ET) >.
 - If you select [Manual], turn the < < > dial to select the shutter speed, then press < (SET) >.

Manually set





- If a correct exposure cannot be obtained with the maximum ISO speed limit set with [Auto ISO range], a shutter speed slower than the [Min. shutter spd.1 will be set to obtain a standard exposure.
- This function will not be applied to flash and movie shooting.



When [Auto: 0] is set, the minimum shutter speed will be the reciprocal of the lens focal length. A single step from [Slower] to [Faster] is equivalent to a single shutter speed stop.

Selecting a Picture Style ★

By selecting a Picture Style, you can obtain image characteristics matching your photographic expression or the subject.

The Picture Style is set automatically to [[Auto) in the < [] mode



Press the < < ✓>> button.



Select [≥ :].

The Picture Style selection screen will appear.



Select a Picture Style.

The Picture Style will be set and the camera will be ready to shoot.

Picture Style Characteristics

Auto

The color tone will be adjusted automatically to suit the scene. The colors will look vivid, especially for blue skies, greenery and sunsets. and in nature, outdoor and sunset scenes.



If the desired color tone is not obtained with [Auto], use another Picture Style.

Standard

The image looks vivid, sharp, and crisp. This is a general-purpose Picture Style suitable for most scenes.

Portrait

For nice skin tones. The image looks softer. Suited for close-up portraits.

By changing the [Color tone] (p.168), you can adjust the skin tone.

Landscape

For vivid blues and greens, and very sharp and crisp images. Effective for impressive landscapes.

Fine Detail

Suited for detailed outline and fine texture description of the subject. The colors will be slightly vivid.

≅N Neutral

Suited for processing the image with a computer. For natural colors and subdued images with modest brightness and color saturation.

部 Faithful

Suited for processing the image with a computer. The color of a subject that is captured in sunlight at a color temperature of 5200K will be adjusted to match the subject's colorimetrical color. For subdued images with modest brightness and color saturation.

Monochrome

Creates black-and-white images.



Black-and-white images shot in JPEG cannot be turned into color. If you want to later shoot pictures in color, make sure the [Monochrome] setting is canceled




You can display < >> in the viewfinder when [Monochrome] is set (p.409).

্রামা User Def. 1-3


You can register a basic style such as [Portrait], [Landscape], a Picture Style file, etc., and adjust it as desired (p.172). Any User Defined Picture Style that is not set will have the same settings as the [Standard] Picture Style.

Symbols

The Picture Style selection screen has icons for [Strength], [Fineness], or [Threshold] of [Sharpness], [Contrast], and other parameters. The numerals indicate the set values for these parameters as set by the respective Picture Style.



Symbols



Շահ Customizing a Picture Style ★

You can customize the Picture Styles. You can change or adjust the parameter settings of Picture Styles such as [Strength], [Fineness], or [Threshold] of [Sharpness], and [Contrast], and other parameters from the default settings. To see the resulting effects, take test shots. To customize [Monochrome], see page 171.





▶ The Picture Style selection screen will appear.



Select a Picture Style.

Select a Picture Style, then press <INFO.> button.



Select a parameter.

- Select the parameter (such as [Sharpness] - [Strength]) to be set, then press <
- The settings and effects are explained on page 170.



Set the parameter.

- Adjust the parameter as desired, then press < (FT) >.
- Press the < MENU> button to save the adjusted parameters. The Picture Style selection screen will reappear.
- Any parameter settings different from the default will be displayed in blue.



- By selecting [Default set.] in step 4, you can revert the parameter settings of the respective Picture Style to its default.
- To shoot with the Picture Style you adjusted, first select the adjusted Picture Style, then shoot.

Parameter Settings and Effects

Sharpness				
0	G	Strength	0: Less sharp outline	7: Sharp outline
	Œ	Fineness*1	1: Fine	5: Coarse
	C	Threshold*2	1: Low	5: High
•	Contrast		-4: Low contrast	+4: High contrast
္	Saturation		-4: Low saturation	+4: High saturation
	Color tone		-4: Reddish skin tone	+4: Yellowish skin tone

^{*1:} Indicates the fineness of the outlines to be emphasized. The smaller the number, the finer the outlines can be emphasized.

^{*2:} Sets how much the outline is emphasized based on the difference in contrast between the subject and the surrounding area. The smaller the number, the more the outline will be emphasized when the contrast difference is low. However, noise at high ISO speeds tends to be more noticeable when the number is smaller.

Monochrome Adjustment

Besides [Strength], [Fineness], or [Threshold] of [Sharpness] and [Contrast], you can also set [Filter effect] and [Toning effect].

Filter effect



With a filter effect applied to a monochrome image, you can make white clouds or green trees stand out more

Filter	Sample Effects
N: None Normal black-and-white image with no filter effects.	
Ye: Yellow	The blue sky will look more natural, and the white clouds will look crisper.
Or: Orange	The blue sky will look slightly darker. The sunset will look more brilliant.
R: Red	The blue sky will look quite dark. Fall leaves will look crisper and brighter.
G: Green	Skin tones and lips will appear muted. Green tree leaves will look crisper and brighter.



Increasing the [Contrast] will make the filter effect more pronounced.

Toning effect



By applying a toning effect, you can create a monochrome image in that color. It can make the image look more impressive.

The following can be selected: [N:None]. [S:Sepia], [B:Blue], [P:Purple] or [G:Green].

尽量 Registering a Picture Style *

You can select a base Picture Style such as [Portrait] or [Landscape], adjust its parameters as desired and register it under [User Def. 1], [User Def. 2], or [User Def. 3]. You can create multiple Picture Styles with different settings for parameters such as sharpness and contrast. You can also adjust the parameters of a Picture Style that is registered to the camera with EOS Utility (EOS software, p.520).

Press the < 1/2 > button.



Select [≥ 1.

The Picture Style selection screen will appear.




Select [User Def. *].

Select [User Def. *1, then press <INFO.> button.



User Def. 1 Picture Style Landscape Press < (SET) >.

With [Picture Style] selected, press <(SET)>.




- Select the base Picture Style, then press < (SET) >.
- To adjust the parameters of a Picture Style that is registered to the camera with EOS Utility (EOS software), select the Picture Style here.

Detail set.









Select the parameter (such as [Sharpness] - [Strength]) to be set, then press <@;>.

Set the parameter.

- Adjust the parameter as desired, then press <(x)>.
 For details, see "Customizing a Picture Style" (p.168).
- Press the < MENU> button to register the modified Picture Style. The Picture Style selection screen will then reappear.
- The base Picture Style will be indicated on the right of [User Def. *].



- If a Picture Style has already been registered under [User Def. *], changing the base Picture Style in step 5 will nullify the parameter settings of the registered Picture Style.
- If you perform [Clear all camera settings] (p.70), all the [User Def. *] styles and settings will revert to their defaults. Any Picture Style registered via EOS Utility (EOS software) will have only its modified parameters reverted to the default setting.



- To shoot with the Picture Style you adjusted, select the registered [User Def. *], then shoot.
- Regarding the procedure to register a Picture Style file to the camera, refer to the EOS Utility Instruction Manual (p.520).


WB: Setting the White Balance *

White balance (WB) is for making the white areas look white. Normally, the Auto [AWB] (Ambience priority) or [AWB w] (White priority) setting will obtain the correct white balance. If natural-looking colors cannot be obtained with Auto, you can select the white balance to match the light source or set it manually by shooting a white object.

< (A) is automatically set in the [WB] (Ambience priority) mode.



Press the <WB•®> button. (♂6)



Select a white balance setting.

 While looking at the LCD panel or in the viewfinder, turn the <>> dial.

(Approx.)

Display	Mode	Color Temperature (K: Kelvin)	
AWB	Auto (Ambience priority, p.175)	3000-7000	
AWB w	Auto (White priority, p.175)	3000-7000	
*	Daylight	5200	
	Shade	7000	
•	Cloudy, twilight, sunset	6000	
*	Tungsten light	3200	
W	White fluorescent light	4000	
4	Flash use	Automatically set*	
№	Custom (p.176)	2000-10000	
K	Color temperature (p.178)	2500-10000	

^{*} Applicable with Speedlites having a color temperature transmission function. Otherwise, it will be fixed to approx. 6000 K.



You can also set this with [2: White balance].

White Balance

To the human eye, a white object looks white regardless of the type of lighting. With a digital camera, the white for color correction basis is decided depending on the color temperature of the illumination, and then the color is adjusted with software to make the white areas look white. With this function, pictures with natural color shades can be taken.

AWB Auto White Balance

With the standard [ME] (Ambience priority), you can increase the intensity of the image's warm color cast when shooting a tungsten-light scene. If you select [MEW] (White priority), you can reduce the intensity of the image's warm color cast.

If you want to match the Auto white balance of previous EOS DIGITAL camera models, select [200] (Ambience priority).



Under the [♠2] tab, select [White balance], then press <(€17)>.



 Select < WE>, then press < INFO.> button.





Select the desired item.

 Select [Auto: Ambience priority] or [Auto: White priority], then press <(fr)>.

AWE : Auto: Ambience priority

AWE w : Auto: White priority




Cautions for Setting [AMBw] (White priority)

- The reddish color cast of subjects may fade.
- When multiple light sources are included on the screen, the red color cast of the picture may not be lessened.
- When using flash, the color tone will be the same as [ANE] (Ambience priority).

Custom White Balance

Custom white balance enables you to manually set the white balance for a specific light source for better accuracy. Perform this procedure under the actual light source to be used.





Shoot a white object.


- Look through the viewfinder and aim the entire dotted line box (shown in the illustration) over a plain, white object.
- Focus manually and shoot with the standard exposure set for the white object.
- You can use any white balance setting.






- Under the [2] tab, select [Custom White Balance, then press < (FT) >.
- The custom white balance selection. screen will appear.





- Turn the <
 > dial to select the image captured in step 1, then press <
 <
- On the dialog screen that appears, select [OK] and the data will be imported.
- Press the < MENU > button to exit the menu.



Press the <WB• ● > button. (66)

Select the custom white balance.

Look at the LCD panel and turn the< ⇒ dial to select < ≥>.



- If the exposure obtained in step 1 differs greatly from the standard exposure, a correct white balance may not be obtained.
- In step 3, the following images cannot be selected: Images captured while the Picture Style was set to [Monochrome], multiple-exposure images, and images shot with another camera.




- Instead of a white object, a gray chart or 18% gray reflector (commercially available) can produce a more accurate white balance.
- The personal white balance registered with the EOS software will be registered under < △2>. If you perform step 3, the data for the registered personal white balance will be erased.

K Setting the Color Temperature

You can set the white balance's color temperature numerically. This is for advanced users.





 Under the [♠2] tab, select [White balance], then press <♠>.



Set the color temperature.

- Select [K].
- Turn the <[™] > dial to set the color temperature, then press <[™] >.
- The color temperature can be set from approx. 2500 K to 10000 K in 100 K increments



- When setting the color temperature for an artificial light source, set white balance correction (magenta or green) as necessary.
- If you set [K] to the reading taken with a commercially-available color temperature meter, take test shots and adjust the setting to compensate for the difference between the color temperature meter's reading and the camera's color temperature reading.

₩ White Balance Correction *

You can correct the white balance that is set. This adjustment will have the same effect as using a commercially-available color temperature conversion filter or color compensating filter. Each color can be corrected to one of nine levels.

This function is for advanced users who are familiar with using color temperature conversion or color compensating filters.


White Balance Correction



Select [WB Shift/Bkt.].



Sample setting: A2, G1



Set the white balance correction.

- Use <⊕> to move the "■" mark to the appropriate position.
- B is for blue, A for amber, M for magenta, and G for green. The image's color balance will be adjusted towards the color in the direction of the move.
- On the right of the screen, "Shift" indicates the direction and correction amount, respectively.
- Pressing the < m̄ > button will cancel all the [WB Shift/Bkt.] settings.
- Press < (st) > to exit the setting.



- During the white balance correction, <∰> will be displayed on the LCD panel.
- You can display < > in the viewfinder when white balance correction is set (p.409).
- One level of the blue/amber correction is equivalent to approx. 5 mireds of a color temperature conversion filter. (Mired: Measuring unit indicating the density of a color temperature conversion filter.)

White Balance Auto Bracketing

With just one shot, three images with different color tones can be recorded simultaneously. Based on the color temperature of the current white balance setting, the image will be bracketed with a blue/amber bias or magenta/green bias. This is called white balance bracketing (WB-BKT). White balance bracketing is possible up to ±3 levels in single-level increments.



B/A bias ±3 levels



Set the white balance bracketing amount.

- In step 2 for "White Balance Correction", when you turn the <
 dial, the "■" mark on the screen will change to "■ ■ " (3 points).
 - Turning the dial to the right sets the B/A bracketing, and turning it to the left sets the M/G bracketing.
- On the right, "Bracket" indicates the bracketing direction and correction amount.
- Pressing the < m̄ > button will cancel all the [WB Shift/Bkt.] settings.
- Press < (st) > to exit the setting.

Bracketing Sequence

The images will be bracketed in the following sequence: 1. Standard white balance, 2. Blue (B) bias, and 3. Amber (A) bias, or 1. Standard white balance, 2. Magenta (M) bias, and 3. Green (G) bias.



- During WB bracketing, the maximum burst for continuous shooting will be lower.
- Since three images are recorded for one shot, it takes longer to record the image to the card.




- You can also set white balance correction and AEB together with white balance bracketing. If you set AEB in combination with white balance bracketing, a total of nine images will be recorded for a single shot.
- When white balance bracketing is set, the white balance icon will blink.
- You can change the number of shots for white balance bracketing (p.404).
- "Bkt." stands for bracketing.

MENU Auto Correction of Brightness and Contrast *

If the image comes out dark or the contrast is low, the brightness and contrast can be corrected automatically. This function is called Auto Lighting Optimizer. The default setting is [Standard]. With JPEG images, the correction is applied when the image is captured. [Standard] is automatically set in the $\langle \underline{A}^{\dagger} \rangle$ mode.





Under the [2] tab, select [Auto Lighting Optimizer1, then press <(SET)>.



Select the setting.

Select the desired setting, then press <(SET)>.

Take the picture.

The image will be recorded with the brightness and contrast corrected if necessary.



- Depending on the shooting conditions, noise may increase.
- If the Auto Lighting Optimizer is too strong and the image is too bright, set [Low] or [Disable].
- If a setting other than [Disable] is set and you use exposure compensation or flash exposure compensation to darken the exposure. the image may still come out bright. If you want a darker exposure, set this function to [Disable].
- If [3: Highlight tone priority] is set to [Enable], the Auto Lighting Optimizer will be set automatically to [Disable].




In step 2, if you press the <**INFO.**> button and uncheck <√> the [**Disabled** in M or B modes setting, the [Auto Lighting Optimizer] can also be set in the $\langle \mathbf{M} \rangle$ and $\langle \mathbf{B} \rangle$ modes.

MENU Setting Noise Reduction ★

High ISO Speed Noise Reduction

This function reduces the noise generated in the image. Although noise reduction is applied at all ISO speeds, it is particularly effective at high ISO speeds. At low ISO speeds, the noise in the darker parts of the image (shadow areas) is further reduced.



Select [High ISO speed NR].

Under the [3] tab, select [High ISO speed NR], then press < (st)>.



Set the level.

Select the desired noise reduction level, then press < (FT)>.

IN : Multi Shot Noise Reduction This applies noise reduction with higher image quality than [High]. For a single photo, four shots are taken continuously and aligned and merged automatically into a single JPEG image. If the image-recording quality is set to RAW or RAW+JPEG, you cannot set [Multi Shot Noise Reduction].

Take the picture.

The image will be recorded with noise reduction applied.



When Multi Shot Noise Reduction is set, you can display < >> in the viewfinder (p.409).



Cautions for Setting Multi Shot Noise Reduction

- If there is significant misalignment in the image due to camera shake, the noise reduction effect may be minimal.
- If you are handholding the camera, keep it steady to prevent camera shake. Using a tripod is recommended.
- If you shoot a moving subject, the moving subject may leave afterimages.
- The image alignment may not function properly with repetitive patterns (lattice, stripes, etc.) or flat, single-tone images.
- If the subject's brightness changes as the four consecutive shots are taken, irregular exposure in the image may result.
- After shooting, it may take some time to record an image to the card for noise reduction and merging the images. During the processing of the images. "buSY" will be displayed in the viewfinder and on the LCD panel. and you cannot take another picture until the processing is completed.
- You cannot use AEB and WB bracketing.
- If [♠3: Long exp. noise reduction], [♠3: Multiple exposure], [♠3: HDR Mode], AEB, or WB bracketing is set, [Multi Shot Noise Reduction1 cannot be set.
- You cannot set [Multi Shot Noise Reduction] for bulb exposures and movie shooting.
- Flash shooting is not possible. The EOS-dedicated, external Speedlite's AF-assist beam will be emitted according to the [AF3: AF-assist beam firinal settina.
- Doing any of the following will automatically switch the setting to [Standard]: Set the power switch to < OFF >, replace the battery, replace the card, select the $\langle \mathbf{A}^{+} \rangle$ or $\langle \mathbf{B} \rangle$ shooting mode, set or switch the image-recording quality to RAW or RAW+JPEG, or switch to movie shooting.

Long Exposure Noise Reduction

Noise reduction is possible with images exposed for 1 sec. or longer.



Long exp. noise reduction



AUTO

Select [Long exp. noise reduction].

Under the [3] tab, select [Long exp. noise reduction], then press <(SET) >.



Set the desired setting.

Select the desired setting, then press <(SET)>.

INFO. Help Auto

Disable Auto

Enable

For exposures of 1 sec. or longer, noise reduction is performed automatically if noise typical of long exposures is detected. This [Auto] setting is effective in most cases.

Enable

Noise reduction is performed for all exposures of 1 sec. or longer. The [Enable] setting may reduce noise that cannot be detected with the [Auto] setting.



Take the picture.

The image will be recorded with noise reduction applied.



- With [Auto] and [Enable], the noise reduction process after the picture is taken may take the same amount of time as that for the exposure. During noise reduction, shooting is still possible as long as the maximum burst indicator in the viewfinder shows "1" or higher.
- Images taken at ISO 1600 or higher may look grainier with the [Enable] setting than with the [Disable] or [Auto] setting.
- With [Enable], if a long exposure is shot with the Live View image displayed, "BUSY" will be displayed during the noise reduction process. The Live View display will not appear until the noise reduction is completed. (You cannot take another picture.)

MENU Highlight Tone Priority*

You can reduce overexposed, clipped highlights.





Select [Highlight tone priority].

Under the [3] tab, select [Highlight tone priority], then press <(SET) >.

Select [Enable].

Highlight details are improved. The dynamic range is expanded from the standard 18% gray to bright highlights. The gradation between the grays and highlights becomes smoother.

Take the picture.

The image will be recorded with highlight tone priority applied.



When [Enable] is set, noise may increase slightly.



With [Enable], the settable range will be ISO 200 - ISO 6400. Also, the <D+> icon will be displayed in the viewfinder and on the LCD panel when highlight tone priority is enabled.

MENU Correction of Lens Peripheral Illumination and Aberration

Peripheral light fall-off is a phenomenon that makes the image corners look darker due to the lens characteristics. Color fringing along subject outlines is called chromatic aberration. This lens aberration and light fall-off can be corrected. By default, Peripheral illumination and Chromatic aberration correction are set to [Enable].

If [Cannot correct - no data] is displayed, see "Lens Correction Data" on the next page.


Peripheral Illumination Correction



Lens aberration correction EF24-70mm t/4L IS USM

Correction data available

Peripheral Illumin.



Under the [
 1] tab, select [Lens aberration correction], then press < (€)>.



) Enable Disable

Select the setting.

- Check that [Correction data available] is displayed for the attached lens.
- Select [Peripheral illumin.], then press < (si)>.

Take the picture.

 The image will be recorded with the peripheral illumination corrected.



Depending on shooting conditions, noise may appear on the image periphery.



- The correction amount applied will be lower than the maximum correction amount settable with Digital Photo Professional (EOS software, p.520).
- The higher the ISO speed, the lower the correction amount will be.

Chromatic Aberration Correction



Select the setting.

- Check that [Correction data available] is displayed for the attached lens.
- Select [Chromatic aberration], then press < (st)>.
- Select [Enable], then press < (st) >.

Take the picture.

 The image will be recorded with the chromatic aberration corrected.

Lens Correction Data

The camera already contains data for lens peripheral illumination correction and chromatic aberration correction for approx. 30 lenses. If you select [Enable], the peripheral illumination correction and chromatic aberration correction will be applied automatically for any lens whose correction data is registered in the camera.

With EOS Utility (EOS software), you can check the lenses of which correction data is registered in the camera. You can also register the correction data for unregistered lenses. For details, refer to the EOS Utility Instruction Manual (p.522).

For lenses incorporating the correction data, it is not necessary to register the correction data to the camera.



Cautions for Lens Correction

- Peripheral illumination correction and chromatic aberration correction cannot be applied to JPEG images already taken.
- When using a non-Canon lens, setting the corrections to [Disable] is recommended, even if [Correction data available] is displayed.
- If you use magnified view during Live View shooting, the peripheral illumination correction and chromatic aberration correction will not be reflected in the image shown on the screen.
- The correction amount will be less if the lens used does not have distance information



Notes for Lens Correction

- If the effect of the correction is not visible, magnify the image after shooting and check it again.
- Corrections can be applied even when an Extender or Life-size Converter is attached.

MENU Reducing Flicker*


If you shoot an image with a fast shutter speed under a light source such as fluorescent light, the blinking of the light source causes flicker and the image may be vertically unevenly exposed. If continuous shooting is used under these conditions, uneven exposures or colors across the images may result.

With anti-flicker shooting, the camera detects the frequency of the light source's blinking and takes the picture when the flicker causes less effect on exposure or color.



Select [Anti-flicker shoot.].

 Under the [△4] tab, select [Antiflicker shoot.], then press < (≦ET) >.



Select [Enable].

Take the picture.

 The image will be taken with reduced unevenness of exposure or color caused by the flicker.



- When [Enable] is set and you shoot under a flickering light source, the shutter-release time lag may become longer. Also, the continuous shooting speed may become slightly slower, and the shooting interval may become irregular.
- This function does not work with Live View shooting and movie shooting.
- In the <P> or <Av> mode, if the shutter speed changes during continuous shooting or if you shoot multiple shots of the same scene at different shutter speeds, the color tone may be inconsistent. To avoid inconsistent color tones, use the <Tv> or <M> mode at a fixed shutter speed.
- The color tone of images shot when [Anti-flicker shoot.] is set to [Enable] may look different from when [Disable] is set.
- Flicker at a frequency other than 100 Hz or 120 Hz cannot be detected.
 Also, if the light's flicker frequency changes during continuous shooting, effects of the flicker cannot be reduced.



- If the subject is against a dark background or if there is a bright light in the image, flicker may not be detected.
 - Under certain special types of lighting, the camera may not be able to reduce the effects of the flicker even when < Flicker! > is displayed.
 - Depending on the light source, flicker may not be detected properly.
 - If you recompose a shot, < Flicker! > may appear and disappear intermittently.
 - Depending on the light sources or shooting conditions, expected result may not be obtained even if you use this function.



- Taking test shots is recommended.
- If < Flicker! > is not displayed in the viewfinder, checkmark [Flicker detection] in [Show/hide in viewfinder] (p.77). When the camera reduces the effects of the flicker when you shoot, < Flicker! > will light. Under a light source which does not flicker, or if no flicker is detected, < Flicker! > will not be displayed.
- If [Flicker detection] is checkmarked and [4: Anti-flicker shoot.] is set to [Disable], metering under a flickering light source will cause < Flicker! > to blink in the viewfinder as a warning. Setting [Enable] before shooting is recommended.
- In the < (A⁺) > mode, the effects of flickering light will be reduced when you shoot, but < Flicker! > will not be displayed.
- Anti-flicker shooting also works with flash. However, the expected result may not be obtained during wireless flash shooting.

MENU Setting the Color Space ★

The range of reproducible colors is called "color space". With this camera, you can set the color space for captured images to sRGB or Adobe RGB. For normal shooting, sRGB is recommended. The color space is set automatically to [sRGB] in the <\(\bar{\texts} \) > mode.

Select [Color space].

Set the desired color space.

 Select [sRGB] or [Adobe RGB], then press < (\$\vert\$)>.



Adobe RGB

This color space is mainly used for commercial printing and other industrial uses. This setting is not recommended if you are not familiar with image processing, Adobe RGB, and Design rule for Camera File System 2.0 (Exif 2.21 or higher). The image will look very subdued in a sRGB computer environment and with printers not compatible with Design rule for Camera File System 2.0 (Exif 2.21 or higher). Post-processing of the image with computer software will therefore be required.



- If the captured still photo was shot in the Adobe RGB color space, the first character in the file name will be an underscore "_".
- The ICC profile is not appended. For explanations about the ICC profile, refer to the Digital Photo Professional Instruction Manual (p.522).

MENU Creating and Selecting a Folder

You can freely create and select the folder where the captured images are to be saved.

This operation is optional since a folder will be created automatically for saving captured images.

Creating a Folder



- Select [Record func+card/folder sel.].
 - Under the [¥1] tab, select [Record func+card/folder sel.], then press
 (ετ)>.



Select [Folder].



Select [Create folder].



Select [OK].

A new folder with the folder number increased by one is created.

Selecting a Folder

Lowest file number Number of images in folder



images will be saved is selected.

Subsequently captured images will be recorded into the selected folder

Select a folder on the folder selection.

screen, then press <(set)>.

The folder where the captured

Folders

As with "100EOS5D" for example, the folder name starts with three digits (the folder number) followed by five alphanumeric characters. A folder can contain up to 9999 images (file number 0001 - 9999). When a folder becomes full, a new folder with the folder number increased by one is created automatically. Also, if manual reset (p.200) is executed, a new folder will be created automatically. Folders numbered from 100 to 999 can be created

Creating Folders with a Computer

With the card open on the screen, create a new folder named "DCIM". Open the DCIM folder and create as many folders as necessary to save and organize your images. The folder name must follow the format "100ABC D". The first three digits are the folder number, from 100 to 999. The last five characters can be any combination of upper- and lower-case letters from A to Z, numerals, and the underscore "." The space cannot be used. Also note that two folder names cannot share the same three-digit folder number (for example, "100ABC D" and "100W XYZ"), even if the remaining five characters in each name are different.


MENU Changing the File Name

The file name has four alphanumeric characters followed by a four-digit image (Example) **BE3B**0001.JPG number (p.199) and extension. The first

four alphanumeric characters are set upon factory shipment and unique to the camera. However, you can change them.

With "User setting1", you can change and register the four characters as desired. With "User setting2", if you register three characters, the fourth character from the left will be appended automatically to indicate the image size.

Registering or Changing the File Name



Select [File name].

Under the [¥1] tab, select [File name], then press < (ET) >.



Select [Change User setting*].



Enter any alphanumeric characters.

- For User setting1, enter four characters. For User setting2, enter three characters.
- Press the < m̄ > button to delete any unnecessary characters.
- Press the <
 > button. The text palette will be highlighted with a color frame, and text can be entered.



 Operate the <◎> dial or <�> to move the ☐ and select the desired character. Then press <@>> to enter it.

Exit the setting.

- After entering the correct number of characters, press the <MENU> button, then select [OK].
- ▶ The registered file name will be saved.

5 Select the registered file name.

- Select [File name], then press < (ET) >.
- Select the registered file name, then press < (ET) >.
- If User setting2 is registered, select "*** (the 3 characters registered) + image size".



Settings



The first character cannot be an underscore "_".



User setting2

When you select the "*** + image size" registered with User setting2 and take pictures, the image-recording quality character will be automatically appended as the file name's fourth character from the left. The meaning of the image-recording quality characters is as follows:

```
"***L" = △ L / △ L / RAW
                             "***M" = ▲ M1 / ▲ M1 / M RAW
"***N" = 	■ M2 / 	■ M2
                              "***S" = 4 S1 / 4 S1 / S RAW
"***T" = $2
                              "***U" = $3
```

When the image is transferred to a computer, the automatically appended fourth character will be included. You can then see the image size without having to open the image. RAW or JPEG images can be distinguished with the extension.



- The extension will be ".JPG" for JPEG images, ".CR2" for RAW images, and ".MOV" for movies.
- When you shoot a movie with User setting2, the file name's fourth character will be an underscore " ".

MENU File Numbering Methods

The four-digit file number is like the frame number on a roll of film. The captured images are assigned a sequential file number from 0001 to 9999 and saved in one folder. You can change



how the file number is assigned.

Select [File numbering].

 Under the [¥1] tab, select [File numbering], then press <€□>.

Select the file numbering method.


 Select the desired setting, then press <(SET)>.

Continuous


Continues the file numbering sequence even after the card is replaced or a new folder is created.

Even after you replace the card, create a folder, or switch the target card (such as $\boxed{1} \rightarrow \boxed{2}$), the file numbering continues in sequence up to 9999 for the images saved. This is convenient when you want to save images numbered anywhere between 0001 to 9999 on multiple cards or in multiple folders into one folder on your computer.

If the replacement card or existing folder already contains images recorded previously, the file numbering of the new images may continue from the file numbering of the existing images on the card or in the folder. If you want to use continuous file numbering, it is recommended that you use a newly-formatted card each time.



.




Auto Reset

Restarts the file numbering from 0001 each time the card is replaced or a new folder is created.

When you replace the card, create a folder, or switch the target card (such as $\boxed{1} \rightarrow \boxed{2}$), the file numbering continues in sequence from 0001 for the images saved. This is convenient if you want to organize images according to cards or folders.

If the replacement card or existing folder already contains images recorded previously, the file numbering of the new images may continue from the file numbering of the existing images on the card or in the folder. If you want to save images with the file numbering starting from 0001, use a newly formatted card each time.



Manual Reset

Resets the file numbering to 0001 or to start from file number 0001 in a new folder.

When you reset the file numbering manually, a new folder is created automatically and the file numbering of images saved to that folder starts from 0001.


This is convenient if you want to use different folders for the images taken yesterday and the ones taken today, for example. After the manual reset, the file numbering returns to continuous or auto reset. (There will be no manual reset confirmation dialog.)



If the file number in folder 999 reaches 9999, shooting will not be possible even if the card still has storage capacity. The LCD monitor will display a message telling you to replace the card. Replace it with a new card.

MENU Setting Copyright Information ★

When you set the copyright information, it will be recorded to the image as Exif information.



Select [Copyright information].

 Under the [¥4] tab, select [Copyright information], then press <sir)>.



Select the option to be set.

 Select [Enter author's name] or [Enter copyright details], then press <



Enter text.

- Press the <
 > button. The text palette will be highlighted with a color frame, and text can be entered.
- Operate the <<p>> dial or <</p>
 > to move the
 □ and select the desired character. Then press <
 > to enter it.
- You can enter up to 63 characters.
- To delete a character, press the < m̄> button.
- To cancel the text entry, press the <INFO.> button, then select [OK].

Exit the setting.

- After entering the text, press the <MENU> button, then select [OK].
- The information is saved.

Checking the Copyright Information



When you select [Display copyright info.] in step 2, you can check the [Author] and [Copyright] information that you entered.

Deleting the Copyright Information

When you select [Delete copyright information] in step 2 on the preceding page, you can delete the [Author] and [Copyright] information.



If the entry for "Author" or "Copyright" is long, it may not be displayed entirely when you select [Display copyright info.].



You can also set or check the copyright information with EOS Utility (EOS software, p.520).

5

Advanced Operations



In the <**P**><**Tv**><**Av**><**M**>
<**B**> shooting modes, you can select the shutter speed, aperture, and other camera settings to change the exposure and obtain the desired result.

- A ☆ icon at the upper right of a page title indicates a function that can be used only in the following modes: <P>
 Tv><Av><M>.
- After you press the shutter button halfway and let go, the exposure values will remain displayed in the viewfinder and on the LCD panel for 4 sec. (∅4).
- For the functions settable in each shooting mode, see page 456.






Set the <LOCK▶> switch to the left.

P: Program AE

The camera automatically sets the shutter speed and aperture to suit the subject's brightness. This is called Program AE.

- * <**P**> stands for Program.
- * AE stands for Auto Exposure.







Focus on the subject.

- Look through the viewfinder and aim the AF point over the subject. Then press the shutter button halfway.
- When focus is achieved, the focus indicator < ● > in the viewfinder will light up (in One-Shot AF mode).
- The shutter speed and aperture will be set automatically and displayed in the viewfinder and on the LCD panel.





Check the display.

 A standard exposure will be obtained as long as the shutter speed and aperture displays do not blink.

4

Take the picture.

 Compose the shot and press the shutter button completely.







If the "30"" shutter speed and the lowest f/number blink, it indicates underexposure. Increase the ISO speed or use flash.

If the "8000" shutter speed and the highest f/number blink, it indicates overexposure. Lower the ISO speed or use an ND filter (sold separately) to reduce the amount of light entering the lens.



☐ Differences Between <P> and <戶 Modes

In the < (> mode, many functions, such as the AF operation and metering mode, are set automatically to prevent spoiled shots. The functions you can set are limited. With <**P**> mode, only the shutter speed and aperture are set automatically. You can freely set the AF operation, metering mode, and other functions (p.456).

Program Shift

- In the Program AE mode, you can freely change the shutter speed and aperture combination (Program) set automatically by the camera while maintaining the same exposure. This is called Program shift.
- To shift the program, press the shutter button halfway, then turn the <>> dial until the desired shutter speed or aperture is displayed.
- Program shift will be canceled automatically when the metering timer $(\mathring{O}4)$ ends (exposure setting display turns off).
- Program shift cannot be used with flash.

Tv: Shutter-Priority AE

In this mode, you set the shutter speed and the camera automatically sets the aperture to obtain the standard exposure matching the brightness of the subject. This is called shutter-priority AE. A faster shutter speed can freeze the action of a moving subject. A slower shutter speed can create a blurred effect, giving the impression of motion

* < Tv > stands for Time value.



Blurred motion (Slow shutter speed: 1/30 sec.)



Frozen action (Fast shutter speed: 1/2000 sec.)





Set the Mode Dial to < Tv >.

Set the desired shutter speed.

 While looking at the LCD panel or in the viewfinder, turn the < △ > dial.

Focus on the subject.

- Press the shutter button halfway.
- The aperture is set automatically.


Suu Yu 3-2-1-1-1-213 Isoyoo (3Y)€

Check the viewfinder display and shoot.

 As long as the aperture is not blinking, a standard exposure will be obtained.







Turn the < > dial to set a slower shutter speed until the aperture stops blinking or set a higher ISO speed.



If the highest f/number blinks, it indicates overexposure.

Turn the < > dial to set a faster shutter speed until the aperture stops blinking or set a lower ISO speed.



Shutter Speed Display

The shutter speeds from "8000" to "4" indicate the denominator of the fractional shutter speed. For example, "125" indicates 1/125 sec., "0"5" indicates 0.5 sec. and "15"" is 15 sec.

Av : Aperture-Priority AE

In this mode, you set the desired aperture and the camera sets the shutter speed automatically to obtain the standard exposure suiting the subject brightness. This is called aperture-priority AE. A higher f/number (smaller aperture hole) will make more of the foreground and background fall within acceptable focus. On the other hand, a lower f/number (larger aperture hole) will make less of the foreground and background fall within acceptable focus.

* < Av > stands for Aperture value (aperture opening).



(With a low aperture f/number: f/5.6)



Sharp foreground and background (With a high aperture f/number: f/32)



Set the Mode Dial to $\langle Av \rangle$.



Set the desired aperture.

While looking at the LCD panel or in the viewfinder, turn the < > dial.

- Focus on the subject.
 - Press the shutter button halfway. The shutter speed is set automatically.



Check the viewfinder display and shoot.

As long as the shutter speed is not blinking, a standard exposure will be obtained





If the "30"" shutter speed blinks, it indicates underexposure.

Turn the < >> dial to set a larger aperture (lower f/number) until the shutter speed blinking stops or set a higher ISO speed.



If the "8000" shutter speed blinks, it indicates overexposure.

Turn the < > dial to set a smaller aperture (higher f/number) until the shutter speed blinking stops or set a lower ISO speed.




Aperture Display

The higher the f/number, the smaller the aperture opening will be. The f/number displayed will differ depending on the lens. If no lens is attached to the camera, "00" will be displayed for the aperture.

Depth-of-Field Preview *

The aperture opening (diaphragm) changes only at the moment when the picture is taken. Otherwise, the aperture remains fully open. Therefore, when you look at the scene through the viewfinder or on the LCD monitor, the depth of field will look narrow.



Press the depth-of-field preview button to stop down the lens to the current aperture setting and check the depth of field (range of acceptable focus).




- A higher f/number will make more of the foreground and background fall within acceptable focus. However, the viewfinder will look darker.
- While looking at the Live View image (p.256), you can change the aperture and press the depth-of-field preview button to see how the depth of field changes.
- The exposure will be locked (AE lock) while the depth-of-field preview button is pressed.

M: Manual Exposure


In this mode, you set both the shutter speed and aperture as desired. To determine the exposure, refer to the exposure level indicator in the viewfinder or use a commercially-available exposure meter. This method is called manual exposure.

* < M > stands for Manual.



Set the Mode Dial to $\langle M \rangle$.

Set the ISO speed (p.158).



Set the shutter speed and aperture.

- To set the shutter speed, turn the < হ[ু]্র > dial
- To set the aperture, turn the <0> dial.
- If it cannot be set, set the <1 OCK▶> switch to the left, then turn the < or < <>> dial.

Standard exposure index



Focus on the subject.

- Press the shutter button halfway.
- The exposure setting will be displayed in the viewfinder and on the LCD panel.
- The exposure level mark < 1> indicates how far the current exposure level is from the standard exposure level.

ONE SHOT 160 5.0(1999) -3..2..1..•..1..2.:3 ISO •

.

Set the exposure and take the picture.

- Check the exposure level indicator and set the desired shutter speed and aperture.
- If the exposure level exceeds ±3 stops from the standard exposure. the end of the exposure level indicator will display < ◆> or < ▶>.

Exposure Compensation with Auto ISO

If the ISO speed is set to **A** (AUTO), you can set exposure compensation (p.214) as follows:

- Quick Control (p.61)



- If Auto ISO is set, the ISO speed setting will change to suit the shutter speed and aperture in order to obtain a standard exposure. Therefore, you may not obtain the desired exposure effect. In such a case, set the exposure compensation.
- If flash is used when Auto ISO is set, exposure compensation will not be applied even if an exposure compensation amount is set.



- Under [2: Auto Lighting Optimizer], if the checkmark <√> for [Disabled in M or B modes] is removed, Auto Lighting Optimizer can be set even in the < M > mode (p.182).
- When Auto ISO is set, you can press the <★> button to lock the ISO speed.
- If you press the <★> button and recompose the shot, you can see the exposure level difference on the exposure level indicator compared to when you pressed the <★> button.
- If exposure compensation (p.214) was applied in <P>, <Tv>, or <Av> mode, and then the shooting mode is switched to <M> with Auto ISO set, the exposure compensation amount already set will be maintained.
- With Auto ISO set and [.n.1: ISO speed setting increments] set to [1/2-stop], any 1/2-stop exposure compensation will be implemented with the ISO speed (1/3 stop) and shutter speed. However, the shutter speed displayed will not change.

Selecting the Metering Mode [★]

You can select one of four methods to measure the subject brightness. In the (a) > mode, evaluative metering is set automatically.



Press the <WB•®> button. (∅6)



Select the metering mode.

- While looking at the LCD panel or in the viewfinder, turn the < > dial.
 - :Evaluative metering
 - :Partial metering
 - :Spot metering
 - :Center-weighted average metering



Evaluative metering

This is a general-purpose metering mode suited even for backlit subjects. The camera sets the exposure automatically to suit the scene.



Partial metering

Effective when the background is much brighter than the subject due to backlighting, etc. Partial metering covers approx. 6.1% of the viewfinder area at the center.

Spot metering

This is for metering a specific spot of the subject or scene. Spot metering covers approx. 1.3% of the viewfinder area at the center. The spot metering circle will be displayed in the viewfinder.



Center-weighted average metering

The metering is weighted at the center and then averaged for the entire scene.



- With (Evaluative metering), the exposure setting will be locked when you press the shutter button halfway and focus is achieved (in One-Shot AF mode). In the (I) (Partial metering), (I) (Spot metering), and (I) (Center-weighted average metering) modes, the exposure is set at the moment the picture is taken. (Pressing the shutter button halfway does not lock the exposure.)
- When < > (Spot metering) is set, you can display < > in the viewfinder (p.409).

Setting Exposure Compensation [★]

Exposure compensation can brighten (increased exposure) or darken (decreased exposure) the standard exposure set by the camera. Exposure compensation can be set in the $\langle P \rangle$, $\langle Tv \rangle$, and $\langle Av \rangle$ shooting modes. Although you can set the exposure compensation up to ±5 stops in 1/3stop increments, the exposure compensation indicator in the viewfinder and on the LCD panel can only display the setting up to ±3 stops. If you want to set the exposure compensation setting beyond ±3 stops, use the Quick Control (p.61) or follow the instructions for [2: Expo.comp./AEB] on the next page. If the <M> mode and the Auto ISO are both set, see page 211 to set the exposure compensation.

Check the exposure.

Press the shutter button halfway (\$\display 4) and check the exposure level indicator.

Set the exposure compensation amount.

- While looking at the viewfinder or LCD panel, turn the <0> dial.
- If it cannot be set, set the <I OCK▶> switch to the left, then turn the <>> dial.

Take the picture.

To cancel exposure compensation, set the exposure level indicator < 1/ 1 > to the standard exposure index (<♥>



or <♥>).



Increased exposure for a brighter image

Decreased exposure for a darker image

5.6 (24) 124 E 189 100 1341

™ 11 2 □

⊚

TITA

2.0 3.24 6.14

-3..2..1..•[1]2.:3 ISO

3..2 1. ...1..2.:3 ISO I

If [2: Auto Lighting Optimizer] (p.182) is set to any setting other than [Disable], the image may still look bright even if a decreased exposure compensation for a darker image is set.



- The exposure compensation amount will remain in effect even after you set the power switch to <OFF>.
- After setting the exposure compensation amount, you can prevent the exposure compensation amount from changing accidentally by setting the <1 OCK ▶> switch to the right.
- If the exposure compensation amount exceeds ±3 stops, the end of the exposure level indicator will display < ◆> or < ▶>.

Auto Exposure Bracketing (AEB) [★]

By changing the shutter speed or aperture automatically, the camera brackets the exposure up to ±3 stops in 1/3-stop increments for three successive shots. This is called AEB.

* AEB stands for Auto Exposure Bracketing.





AEB range



Standard exposure



Increased exposure



Select [Expo.comp./AEB].

Set the AEB range.

- Turn the < > dial to set the AEB range. If you turn < > , you can set the exposure compensation.
- Press < (SET) > to set it.
- When you exit the menu, <[™] > and the AEB range will be displayed on the LCD panel.

Take the picture.

- Three bracketed shots will be taken according to the drive mode set in this sequence: Standard exposure, decreased exposure, and increased exposure.
- AEB will not be automatically canceled. To cancel AEB, follow step 2 to turn off the AEB range display.



- During AEB, <★> in the viewfinder and <─> on the LCD panel will blink.
- If the drive mode is set to <□> or <□\$>, press the shutter button three times for each shot. When <□H>, <□>, or <□\$> is set and you hold down the shutter button completely, the three bracketed shots will be taken continuously and the camera will automatically stop shooting. When <▮♂> or <▮♂≥ is set, the three bracketed shots will be taken continuously after a 10-sec. or 2-sec. delay.
- You can set AEB in combination with exposure compensation.
- If the AEB range exceeds ±3 stops, the end of the exposure level indicator will display < √> or < ▶>.
- AEB cannot be used with flash, bulb exposures, or when [Multi Shot Noise Reduction] or [HDR Mode] is set.
- AEB will be canceled automatically when you set the power switch to
 OFF > or when the flash is ready to fire.

X AE Lock[★]

Use AE lock when the area of focus is to be different from the exposure metering area or when you want to take multiple shots at the same exposure setting. Press the < *\frac{\times}{*} > button to lock the exposure, then recompose and take the picture. This is called AE lock. It is effective for backlit subjects, etc.

Focus on the subject.

- Press the shutter button halfway.
- The exposure setting will be displayed.

Press the $< \frac{1}{4} >$ button. ($\frac{1}{2}$ 4)

- The <★> icon lights up in the viewfinder to indicate that the exposure setting is locked (AE lock).
- Each time you press the $< \frac{1}{x} >$ button. the current exposure setting is locked.

Recompose and take the picture.

If you want to maintain the AE lock while taking more shots, hold down the < *\(\frac{\foats}{}\) button and press the shutter button to take another shot





AE Lock Effects

Metering Mode	AF Point Selection Method (p.93)			
(p.212)	Automatic Selection	Manual Selection		
® *		AE lock is applied at the selected AF point.		
	AE lock is applied at the center	AF point.		

^{*} When the lens's focus mode switch is set to <MF>, AE lock is applied at the center AF point.




AE lock is not possible with bulb exposures.

B: Bulb Exposures

In this mode, the shutter stays open as long as you hold down the shutter button completely, and closes when you let go of the shutter button. This is called bulb exposure. Use bulb exposures for night scenes, fireworks, the heavens, and other subjects requiring long exposures.








Set the desired aperture.

 While looking at the LCD panel or the viewfinder, turn the <
 > or <
 > dial.

Elapsed exposure time



Take the picture.

- The exposure will continue for as long as you keep the shutter button pressed completely.
- The elapsed exposure time will be displayed on the LCD panel.



- Do not point the camera toward an intense light source, such as the sun or an intense artificial light source. Doing so may damage the image sensor or the camera's internal components.
- Long exposures produce more noise than usual.
- If Auto ISO is set, the ISO speed will be ISO 400 (p.160).
- For a bulb exposure, if you use both the self-timer and mirror lockup instead of the bulb timer, keep pressing the shutter button completely (self-timer delay time + bulb exposure time). If you let go of the shutter button during the self-timer countdown, there will be a shutter-release sound, but no picture will be taken. If you use the bulb timer under the same shooting conditions, you need not hold down the shutter button completely.



- With [3: Long exp. noise reduction], you can reduce the noise generated during long exposures (p.185).
- For bulb exposures, using a tripod and bulb timer is recommended.
 Using mirror lockup (p.234) with bulb exposures is also possible.
- You can also shoot bulb exposures by using Remote Switch RS-80N3 or Timer Remote Controller TC-80N3 (both sold separately, p.237).
- You can also use Remote Controller RC-6 (sold separately, p.237) for bulb exposures. When you press the remote controller's transmit button, the bulb exposure will start immediately or 2 sec. later. Press the button again to stop the bulb exposure.

Bulb Timer[★]

You can preset the bulb exposure's exposure time. With the bulb timer, you need not hold down the shutter button during the bulb exposure. This reduces camera shake.

The bulb timer can be set only in the <**B**> (Bulb) shooting mode. It cannot be set (or will not function) in any other shooting mode.






Under the [♠4] tab, select [Bulb timer], then press <(□)>.




Select [Enable].

 Select [Enable], then press < INFO.> button.







Set the desired exposure time.

- Select the hour, minute, or second.
- Press <(s̄) > so < □> is displayed.
- Set the desired number, then press <(ET) > (Returns to <□>).

Select [OK].

- The set time will be displayed on the menu screen

Take the picture.

- Press the shutter button completely, and the bulb exposure will start and continue until the set time elapses.
- To cancel the timer setting, set [**Disable**] in step 2.



- If you press the shutter button completely while the bulb timer is operating, the bulb exposure will stop.
- Doing any of the following will cancel the bulb timer (reverts to [Disable]): Set the power switch to <OFF>, replace the battery, replace the card, switch to movie shooting, or change the shooting mode to other than .

HDR: HDR (High Dynamic Range) Shooting [★]


Clipped highlights and shadows will be reduced for a high dynamic range of tones even with high-contrast scenes. HDR shooting is effective for landscape and still-life shots.

With HDR shooting, three images of different exposures (standard exposure, underexposure, and overexposure) are captured continuously for each shot and then merged together automatically. The HDR image is recorded as a JPEG image.

* HDR stands for High Dynamic Range.







Press the < ✓> button.

Select the HDR mode.

- Select [HDR], then press < (\$\sigma\$)>.
- ▶ The HDR mode screen will appear.

Set [Adjust dyn range].

- Select the desired dynamic range setting, then press < (\$\varepsilon \text{st}) >.
- Selecting [Auto] will have the dynamic range set automatically depending on the image's overall tonal range.
- The higher the number, the wider the dynamic range will be.
- To exit HDR shooting, select [Disable HDR].

Set [Effect].

 Select the desired effect, then press <(ET)>.

Effects

Natural

For images preserving a wide tonal range where the highlight and shadow details would otherwise be lost. Clipped highlights and shadows will be reduced

Art standard

While the clipped highlights and shadows will be reduced more than with [Natural], the contrast will be lower, and the gradation flatter to have the picture look like a painting. The subject outlines will have bright (or dark) edges.

Art vivid

The colors are more saturated than with [Art standard], and the low contrast and flat gradation create a graphic art effect.

Art bold

The colors are the most saturated, making the subject pop out, and the picture look like an oil painting.

Art embossed

The color saturation, brightness, contrast and gradation are decreased to make the picture look flat. The picture looks faded and old. The subject outlines will have bright (or dark) edges.

	Art standard	Art vivid	Art bold	Art embossed
Saturation	Standard	High	Higher	Low
Bold outline	Standard	Weak	Strong	Stronger
Brightness	Standard	Standard	Standard	Dark
Tone	Flat	Flat	Flat	Flatter







Set [Continuous HDR].

- Select either [1 shot only] or [Every shot], then press < (ET) >.
- With [1 shot only], HDR shooting will be canceled automatically after the shooting ends.
- With [Every shot], HDR shooting continues until the setting in step 3 is set to [Disable HDR].

🕻 Set [Auto Image Align].

 For handheld shooting, select [Enable]. When using a tripod, select [Disable], then press <@>>.

Set the images to be saved.

- To save all three images and the merged HDR image, select [All images], then press <@>>.
- To save only the HDR image, select [HDR img only], then press <(st)>.

Take the picture.

- HDR shooting is possible with viewfinder shooting and Live View shooting.
- <HDR> will be displayed on the LCD panel.
- When you press the shutter button completely, three consecutive images will be captured, and the HDR image will be recorded to the card.



- If the image-recording quality is set to RAW, the HDR image will be recorded in **L** quality. If the image-recording quality is set to RAW+JPEG, the HDR image will be recorded in the JPEG quality set.
 - HDR shooting is not possible with ISO expansion (L. H). HDR shooting is possible within ISO 100 - ISO 6400.
 - The flash will not fire during HDR shooting.
 - During HDR shooting, the settings of [2: Auto Lighting Optimizer]. [3: Highlight tone priority], and [5: Expo. simulation] will be automatically switched to [Disable].
 - AFB cannot be set
 - If you shoot a moving subject, the subject's movement may leave afterimages.
 - In HDR shooting, 3 images are captured with different shutter speeds set automatically. Therefore, even in < Tv > and < M > shooting modes, the shutter speed will be shifted based on the shutter speed you set.
 - To prevent camera shake, a high ISO speed may be set.



- When shooting HDR images with [Auto Image Align] set to [Enable], AF point display information (p.325) and Dust Delete Data (p.375) will not be appended to the image.
 - If you perform handheld HDR shooting while [Auto Image Align] is set to [Enable], image periphery will be slightly cropped and resolution will be slightly lowered (except when shooting with [1.3x (crop)] or [1.6x (crop)1). Also, if the images cannot be aligned properly due to camera shake, etc., auto image alignment may not take effect. Note that when shooting with excessively bright (or dark) exposure settings, auto image alignment may not work properly.
 - If you perform handheld HDR shooting while [Auto Image Align] is set to [Disable], the 3 images may not be properly aligned and the HDR effect may be minimal. Using a tripod is recommended.
 - Auto image alignment may not work properly with repetitive patterns. (lattice, stripes, etc.) or flat, single-tone images.
 - The color gradation of the sky or white walls may not be reproduced correctly. Irregular colors, irregular exposure or noise may appear.
 - HDR shooting under fluorescent or LED lighting may result in unnatural. color reproduction of the illuminated areas.
 - With HDR shooting, the images will be merged, then saved to the card, so it may take some time. Therefore, it will take a longer time to record the HDR image to the card than with normal shooting. During the processing of the images, "buSY" will be displayed in the viewfinder and on the LCD panel, and you cannot take another picture until the processing is completed.
 - If you change the shooting mode or switch to movie shooting after setting HDR shooting, HDR shooting setting may be cleared ([Adjust dyn range] setting may be switched to [Disable HDR]).

■ Multiple Exposures *

You can shoot two to nine exposures to be merged into one image. If you shoot multiple-exposure images with Live View shooting (p.255), you can see how the single exposures are being merged while shooting.



On:Func/Ctrl

On:ContShtng

Multiple exposure

Multiple exposure

Disable

Select Multiple exposure.

- Select [➡], then press <☞>.
- The multiple exposure setting screen will appear.



- Select [On:Func/Ctrl] or [On:ContShtng], then press <(st)>.
- To exit shooting multiple exposures, select [Disable].
- On: Func/Ctrl (Function and control priority)
 Convenient when you want to shoot multiple exposures while checking the result as you proceed. During continuous shooting, the continuous shooting speed will decrease greatly.
- On: ContShtng (Continuous shooting priority)
 Geared for continuous multiple-exposure shooting of a moving subject. Continuous shooting is possible, but the following operations are disabled during shooting: menu viewing, Live View display, image review after image capture, image playback, and undo last image (p.232).

Also, only the multiple-exposure image will be saved. (The single exposures merged in the multiple-exposure image will not be saved.)





Set [Multi-expos ctrl].

 Select the desired multiple-exposure control method, then press < (ET) >.

Additive

The exposure of each single exposure is added cumulatively. Based on the [No. of exposures], set a negative exposure compensation. Refer to the basic guide below to set a negative exposure compensation.

Exposure Compensation Setting Guide for Multiple Exposures
Two exposures: -1 stop, three exposures: -1.5 stop, four exposures:
-2 stops

Average

Based on the [No. of exposures], negative exposure compensation is set automatically as you shoot multiple exposures. If you shoot multiple exposures of the same scene, the exposure of the subject's background will be automatically controlled to obtain a standard exposure.

Bright/Dark

The brightness (or darkness) of the base image and the images to be added are compared at the same position, and then the bright (or dark) part will be left in the picture. Depending on the overlapping colors, the colors may be mixed depending on the brightness (or darkness) ratio of the compared images.





Set the [No. of exposures].

- Select the number of exposures, then press < (ET)>.
- You can set it from 2 to 9 exposures.







Remaining number of exposures

Set the images to be saved.

- To save all the single exposures and the merged multiple-exposure image, select [All images], then press <(E)>.
- To save only the merged multipleexposure image, select [Result only], then press <(x)>.

Set [Continue Mult-exp].

- Select either [1 shot only] or [Continuously], then press < (ET)>.
- With [1 shot only], multiple-exposure shooting will be canceled automatically after the shooting ends.
- With [Continuously], multipleexposure shooting continues until the setting in step 3 is set to [Disable].

Take the first exposure.

- When [On:Func/Ctrl] is set, the captured image will be displayed.
- ► The < = > icon will blink.
- The number of remaining exposures is displayed in brackets [] in the viewfinder or on the screen
- Pressing the < > button enables you to view the captured image (p.232).

Shoot subsequent exposures.

- When [On:Func/Ctrl] is set, the merged multiple-exposure image will be displayed.
- With Live View shooting, the multipleexposure images merged so far will be displayed. By pressing the < INFO. > button, you can display only the Live View image.
- After you shoot the set number of exposures, multiple-exposure shooting will exit. With continuous shooting, after you finish shooting the set number of exposures while holding down the shutter button, the shooting will stop.



- The image-recording quality, ISO speed, Picture Style, high ISO speed noise reduction and color space, etc. set for the first single exposure will also be set for the subsequent exposures.
- You cannot use crop shooting or shoot with a set aspect ratio for multiple exposures. [Full-frame] will be applied for [4: Crop/aspect ratio] for shooting.
- During multiple exposure shooting, the settings of [1: Lens aberration correction]. [2: Auto Lighting Optimizer], and [3: Highlight tone priority will be automatically switched to [Disable].
- If [3: Picture Style] is set to [Auto], [Standard] will be applied for shooting.
- If [On:Func/Ctrl] and [Additive], [Bright], or [Dark] are both set, the image displayed during shooting may look noisy. However, when you finish shooting the set number of exposures, noise reduction will be applied and the final multiple-exposure image will be less noisy.
- If you perform Live View shooting while [On:ContShtng] is set, the Live View function will stop automatically after the first shot is taken. From the second shot onward, shoot while looking through the viewfinder.



When [On:Func/Ctrl] is set, you can press the < >> button to view the multiple exposures taken so far or delete the last single exposure (p.232).



- With multiple exposures, the more exposures there are, the more noticeable the noise, irregular colors, and banding will be. Also, as noise increases with higher ISO speeds, shooting at low ISO speeds is recommended.
- If [Additive], [Bright], or [Dark] is set, the image processing after taking the multiple exposures will take time. (The access lamp will light up longer.)
- If you perform Live View shooting while [On:Func/Ctrl] and [Additive],
 [Bright], or [Dark] are both set, the Live View function will stop automatically when the multiple-exposure shooting ends.
- In step 9, the brightness and noise of the multiple-exposure image displayed during Live View shooting will be different from the final multiple-exposure image recorded.
- If [On:ContShtng] is set, let go of the shutter button after shooting the set number of exposures.
- Doing any of the following will cancel the multiple-exposure shooting: Set the power switch to <OFF>, replace the battery, replace the card, or switch to movie shooting.
- If you switch the shooting mode to <(♣[†]) or < ♠¹/♠²/♠² > while shooting, multiple-exposure shooting will end.
- If you connect the camera to a computer or printer, multiple-exposure shooting will not be possible. If you connect the camera to a computer or printer during shooting, multiple-exposure shooting will stop.

Merging Multiple Exposures with an Image Recorded on the Card

You can select a www image recorded on the card as the first single exposure. The image data of the selected www image will remain intact. You can only select www images. You cannot select M www/S www or JPEG images.



Select [Select image for multi. expo.].

The images on the card will be displayed.

Select an image.

- Turn the <>> dial to select the image to be used as the first single exposure, then press <
- Select [OK].
- The file number of the selected image will be displayed at the bottom of the screen.

Take the picture.

 When you select the first image, the number of remaining exposures as set with [No. of exposures] will decrease by 1. For example, if [No. of exposures] is 3, you can shoot two exposures.



- The following cannot be selected as the first single exposure: Images shot with [

 1: Highlight tone priority] set to [Enable], images whose [

 1: Crop/aspect ratio] is set to any setting other than [Full-frame] (p.154), and images having cropping information (p.411).
- [Disable] will be applied for [□1: Lens aberration correction] and
 [□2: Auto Lighting Optimizer] regardless of the settings of the IMM image selected as the first single exposure.
- The ISO speed, Picture Style, high ISO speed noise reduction, and color space, etc. set for the first (ANN) image will also be applied for the subsequent images.
- If [13: Picture Style] is Auto for the RAW image selected as the first
 Image, Standard will be applied for shooting.
- You cannot select an image taken with another camera.



- You can also select a www multiple-exposure image as the first single exposure.
- If you select [Deselect img], the selected image will be canceled.

Checking and Deleting Multiple Exposures During Shooting



When [On:Func/Ctrl] is set and you have not finished shooting the set number of exposures, you can press the < ►> button to view the merged multiple-exposure image so far. You can check how it looks and the exposure. (Not possible when [On:ContShtng] is set.)

If you press the < m > button, the operations possible during multiple-exposure shooting will be displayed.

Operation	Description		
■ Undo last image	Deletes the last image you shot (shoot another image). The number of remaining exposures will increase by 1.		
[³ Save and exit	If [Save source imgs: All images] is set, all of the single exposures and the merged multiple-exposure image will be saved before exiting. If [Save source imgs: Result only] is set, only the multiple-exposure image merged so far will be saved before exiting.		
∯ Exit without saving	None of the images will be saved before exiting.		
	The screen before you pressed the < í > button will reappear.		



During multiple-exposure shooting, you can only play back multiple-exposure images.

? FAQ


Are there any restrictions on the image-recording quality?
 All JPEG image-recording quality settings can be selected. If M XXVIII or S XXVIII is set, the merged multiple-exposure will be a XXIII image.

Image-Recording Quality Setting	Single Exposures	Merged Multiple- Exposure
JPEG	JPEG	JPEG
RAW	RAW	RAW
M RAW / S RAW	M RAW/S RAW	RAW
RAW +JPEG	RAW +JPEG	RAW+JPEG
M RAW/S RAW+JPEG	M RAW/S RAW +JPEG	RAW +JPEG

- Can I merge images recorded on the card?
 With [Select image for multi. expo.], you can select the first single exposure from the images recorded on the card (p.231). Note that you cannot merge multiple images already recorded on the card.
- Are multiple exposures possible with Live View shooting? With [On:Func/Ctrl] set, you can shoot multiple exposures with Live View shooting (p.255). Note that [Full-frame] will be applied for [△4: Crop/aspect ratio] for shooting.
- What file numbers are used for saving merged multiple-exposures?
 If all images are set to be saved, the merged multiple-exposure image file number will be the serial number coming after the file number of the final single exposure used to create the merged multiple-exposure image.
- Will auto power off take effect during multiple-exposure shooting? As long as [♥2: Auto power off] is set to any setting other than [Disable], the power will turn off automatically after 30 min. of non-operation. If the auto power off takes effect, multiple-exposure shooting will end, and multiple-exposure settings will be canceled. Before starting the multiple-exposure shooting, the auto power off will take effect as set with the camera, and multiple-exposure settings will be canceled.

√ Mirror Lockup[★]

Camera vibrations caused by the mirror's reflex action when the picture is taken is called "mirror shock". Mirror lockup keeps the mirror up before and while shooting to reduce blur caused by camera vibrations. Useful when shooting closeups (macro photography), using a super telephoto lens, and shooting at slow shutter speeds.





15

Shoot 1 sec. after press

INFO. Help

Select [Mirror lockup].

Under the [△4] tab, select [Mirror lockup], then press < (☞)>.

Select the desired setting.

When you exit the menu, <√√> will be displayed on the LCD panel.

Take the picture.

- If you select [Press twice to shoot], press the shutter button completely to lock up the mirror, then press it completely again to take a picture.
- If you select [Shoot * sec. after press], press the shutter button completely to lock up the mirror. A picture will be taken after the set time elapses. You can select 1/8 sec. after, 1/4 sec. after, 1/2 sec. after, 1 sec. after, or 2 sec. after.

Minimizing Blurred Photos

- Use a sturdy tripod suited for the camera weight. Mount the camera securely on the tripod.
- Using a remote switch or a remote controller is recommended (p.237).
- In addition to mirror lockup, Silent LV shooting (p.266) and Silent single shooting (p.142) are also effective.
- When using mirror lockup, setting [Shoot * sec. after press] is recommended. Selecting a longer time, such as [Shoot 2 sec. after press], will increase time before the shot, reducing mirror shock.



- Do not point the camera toward an intense light source, such as the sun or an intense artificial light source. Doing so may damage the image sensor or the camera's internal components.
- In very bright light, such as at the beach or a ski slope on a sunny day, take the picture promptly after mirror lockup is stabilized.
- When [Press twice to shoot] is set, single shooting will take effect even if the drive mode is set to continuous shooting.
- If [4: Interval timer] or [4: Bulb timer] is set to [Enable], you cannot select [Press twice to shoot].
- If you use [Shoot *sec. after press] for Multi Shot Noise Reduction shooting or HDR shooting, the [Shoot *sec. after press] setting will be applied only to the first shot. (Continuous shooting will apply for the second and subsequent shots.)
- During mirror lockup, shooting function settings and menu are disabled.




- When [Shoot * sec. after press] is set, you can also use the self-timer or bulb timer with mirror lockup.
- If 30 sec. elapse after the mirror has locked up, it will go back down automatically. Pressing the shutter button completely locks up the mirror again.
- For mirror lockup, using a tripod and Remote Switch RS-80N3 (sold separately) or Timer Remote Controller TC-80N3 (sold separately) is recommended (p.237).
- You can also use a remote controller (sold separately, p.237) with mirror lockup. Setting the remote controller to a 2-sec. delay is recommended.

Using the Eyepiece Cover


When you use the self-timer, bulb, or a remote switch and do not look through the viewfinder, stray light entering the viewfinder can cause the picture to look dark. To prevent this, use the eyepiece cover (p.35) attached to the camera strap.

During Live View shooting and movie shooting, it is not necessary to attach the eyepiece cover.



Detach the eyecup.

 While grasping both sides of the eyecup, slide it upward to detach it.



Attach the eyepiece cover.

- Slide the eyepiece cover down into the eyepiece groove to attach it.
- After you finish shooting, detach the eyepiece cover and attach the eyecup.

You can connect the Remote Switch RS-80N3 (sold separately) or Timer Remote Controller TC-80N3 (sold separately) or any EOS accessory equipped with an N3-type terminal to the camera for shooting (p.454).

To operate the accessory, refer to its instruction manual.



- Open the terminal cover.
- Connect the plug to the remote control terminal.
 - Connect the plug as shown in the illustration.
 - To disconnect the plug, grasp the silver part and pull.


Remote Control Shooting





With Remote Controller RC-6 (sold separately), you can shoot remotely up to approx. 5 meters/16.4 feet from the camera. You can either shoot immediately or use a 2-sec. delay.

You can also use Remote Controller RC-1 and RC-5.

- Focus on the subject.
- Set the lens's focus mode switch to <MF>.
 - You can also shoot with < AF>.
 - **Press the <**DRIVE•AF> button. (७6)







Select the self-timer.

While looking at the LCD panel or in the viewfinder, turn the <0> dial to select < 3> or < 3>.

Press the remote controller's transmit button.

- Point the remote controller toward the camera's remote control sensor, and press the transmit button.
- The self-timer lamp lights up and the picture is taken.



- Fluorescent or LED lighting may cause camera misoperation by triggering the shutter inadvertently. Try to keep the camera away from such light sources.
- If you point a remote controller for a TV set toward the camera and operate it, it may cause camera misoperation by triggering the shutter inadvertently.
- If flash light is emitted from a flash on another camera around this camera, it may cause camera misoperation by triggering the shutter inadvertently. Do not expose the remote control sensor to flash light from a flash on another camera



Remote control shooting is also possible with devices such as an EX-series Speedlite equipped with a remote-release function (sold separately).

□■□■ Interval Timer Shooting

With the interval timer, you can set the shooting interval and the number of shots. The camera will repeat taking one shot with the set interval until the set number of shots are taken



Select [Interval timer].

Under the [□4] tab (the [□2] tab in < (□⁺/₂), select [Interval timer], then press < (□).



Select [Enable].

Select [Enable], then press < INFO.> button.



3 Set the interval and number of shots.

- Select the hour, minute, second, or number of shots.
- Set the desired number, then press
 (♠) (Returns to <□>).
- Interval Settable from [00:00:01] to [99:59:59].
- No. of shots
 Settable from [01] to [99]. If you set [00], the camera will keep shooting until you stop the interval timer.



Interval timer



Select [OK].

- The interval timer settings will be displayed on the menu screen.
- When you exit the menu, <□■□■> will be displayed on the LCD panel.

Take the picture.

- Shooting will start according to the interval timer settings.
- During interval timer shooting,
 - <□■□■> will blink.
- After the set number of shots are taken, the interval timer shooting will stop and be automatically canceled.



- Using a tripod is recommended.
- Taking test shots is recommended.
- After the interval timer shooting starts, you can still press the shutter button completely to take a picture as usual. However, from 5 sec. before the next interval timer shooting, the shooting function settings, menu operation, image playback, and other operations will be suspended, and the camera will be ready to shoot.
- If a picture is taken or an image is being processed as the next interval timer shooting, that interval timer shooting will be canceled. This will make the number of interval timer images captured lower than the set number of shots.
- Auto power off operates with the interval timer. The power will automatically turn on approx. 1 min. before the next shot.
- Interval timer shooting can be combined with AEB, WB bracketing, multiple exposures, and HDR mode.
- You can stop the interval timer shooting by selecting [Disable] or turning the power switch to <OFF>.



- Do not point the camera toward an intense light source, such as the sun or an intense artificial light source. Doing so may damage the image sensor or the camera's internal components.
- If the lens's focus mode switch is set to <AF>, the camera will not shoot when focus is not achieved. Setting it to <MF> and focusing manually is recommended.
- Live View shooting, movie shooting, or bulb exposures cannot be performed with interval timer.
- For prolonged interval timer shooting, using AC Adapter Kit ACK-E6 (sold separately) to power the camera is recommended.
- If a long exposure or shutter speed longer than the shooting interval is set, the camera cannot shoot at the set interval. The camera will thereby shoot fewer shots than the number set for interval timer shooting. Also, the number of shots may decrease when the shutter speed and the shooting interval are nearly the same.
- If card recording time is longer than the set shooting interval, due to card performance or shooting settings, etc., the camera may not shoot at the set shooting interval.
- If you use flash with interval timer shooting, set an interval longer than the flash's recycling time. Otherwise, if the interval is too short, the flash may not fire.
- If the shooting interval is too short, the camera may not take a picture or may capture an image without autofocusing.
- Interval timer shooting will be canceled and reset to [Disable] if you do any of the following: Set the power switch to <OFF>, display the Live View or movie shooting screen, set the shooting mode to or a Custom shooting mode, or use EOS Utility (EOS software, p.520).
- After interval timer shooting starts, you cannot use remote control shooting (p.237) or remote-release shooting with an EOS-dedicated, external Speedlite.
- During interval timer shooting, if your eye will not remain on the viewfinder eyepiece, attach the eyepiece cover (p.236). Stray light entering the viewfinder can throw off the exposure.

MEMO			

6

Flash Photography

This chapter explains how to shoot with external EXseries Speedlites (sold separately) and how to set Speedlite settings with the camera's menu screen.



- Flash cannot be used with movie shooting. It will not fire.
- AEB cannot be used with flash.

5 Flash Photography

EOS-dedicated, EX-series Speedlites

An EX-series Speedlite (sold separately) makes flash photography as easy as normal shooting.

For detailed instructions, refer to the EX-series Speedlite's instruction manual. This camera is a Type-A camera that can use all the features of EX-series Speedlites.

To set the flash functions and flash Custom Functions with the camera's menu, see pages 247-253.



Flash exposure compensation

In the same way as normal exposure compensation, flash exposure compensation can be set. You can set flash exposure compensation up to ±3 stops in 1/3-stop increments.

Press the camera's < 150 > button, then turn the < 0 > dial while looking in the viewfinder or at the LCD panel.

FE lock

This enables you to attain a proper flash exposure for a specific part of the subject. Aim the viewfinder center over the subject, press the camera's <M-Fn> button, then compose the shot and take the picture.



If [2: Auto Lighting Optimizer] (p.182) is set to any setting other than [Disable], the image may still look bright even if a decreased exposure compensation for a darker image is set.



If it is difficult to achieve focus with autofocus, the EOS-dedicated, external Speedlite will automatically emit the AF-assist beam as necessary.

Canon Speedlites Other Than the EX-series


- With an EZ/E/EG/ML/TL-series Speedlite set to A-TTL or TTL autoflash mode, the flash can be fired at full output only.
 Set the camera's shooting mode to <M> (manual exposure) or <Av> (aperture-priority AE) and adjust the aperture setting before shooting.
- When using a Speedlite that has manual flash mode, shoot in the manual flash mode.

Non-Canon Flash Units

Sync Speed

The camera can synchronize with non-Canon compact flash units at 1/200 sec. and slower speeds. With large studio flash units, be sure to test the flash synchronization before shooting with the sync speed set within approx. 1/60 sec. to 1/30 sec. The flash duration of such units is longer than that of compact flash units and varies depending on the model.

PC Terminal



- The camera's PC terminal can be used with flash units having a sync cord. The PC terminal is threaded to prevent inadvertent disconnection.
- The camera's PC terminal has no polarity. You can connect any sync cord regardless of its polarity.

Cautions for Live View Shooting

If you use a non-Canon flash unit with Live View shooting, set [6: Silent LV shoot.] to [Disable] (p.266). The flash will not fire if it is set to [Mode 1] or [Mode 2].

Flash Photography



- If the camera is used with a flash unit or flash accessory dedicated to another camera brand, the camera may not operate properly and malfunction may result.
- Do not connect to the camera's PC terminal any flash unit with an output voltage of 250 V or more.
- Do not attach a high-voltage flash unit on the camera's hot shoe. It may not fire




A flash unit attached to the camera's hot shoe and a flash unit connected to the PC terminal can both be used at the same time.

MENU Setting the Flash ★

With an EX-series Speedlite having compatible flash function settings, you can use the camera's menu screen to set the Speedlite's functions and Custom Functions. Attach the Speedlite to the camera and turn on the Speedlite before setting the flash functions.

For details on the Speedlite's functions, refer to the Speedlite's instruction manual





Select [External Speedlite control].

- Under the [□1] tab, select [External Speedlite control], then press < (set) >.
- The external Speedlite control screen will appear.

Select the desired item.

 Select the menu option to be set, then press < (ET)>.

Flash Firing



To enable flash photography, set [**Enable**]. To enable only the AF-assist beam to be emitted, set [**Disable**].

E-TTL II Metering



For normal flash exposures, set it to [Evaluative]. If [Average] is set, the flash exposure will be averaged for the entire metered scene. Depending on the scene, flash exposure compensation may be necessary. This setting is for advanced users

Flash Sync. Speed in Av Mode



You can set the flash-sync speed for flash photography in the aperture-priority AE (**Av**) mode.

AUT0: Auto

The flash sync speed is set automatically within a range of 1/200 sec. to 30 sec. to suit the scene's brightness. High-speed sync is also possible.

1/200 A: 1/200-1/60sec. auto

Prevents a slow shutter speed from being set in low-light conditions. It is effective for preventing subject blur and camera shake. However, while the subject will be properly exposed with the flash, the background may come out dark.

1/200: 1/200 sec. (fixed)

The flash-sync speed is fixed at 1/200 sec. This more effectively prevents subject blur and camera shake than with [1/200-1/60sec. auto]. However, in low light, the subject's background will come out darker than with [1/200-1/60sec. auto].




If [1/200-1/60sec. auto] or [1/200 sec. (fixed)] is set, high-speed sync is not possible in the < Av > mode.

Flash Function Settings

The screen display and setting options will vary depending on the Speedlite model, current flash mode, Speedlite's Custom Function settings, etc.

To see which functions your Speedlite (sold separately) provides, refer to the Speedlite's instruction manual.

Sample display



Flash mode

You can select the flash mode to suit your desired flash shooting.



[E-TTL II flash metering] is the standard mode of EX-series Speedlites for automatic flash shooting.

[Manual flash] is for setting the Speedlite's [Flash output level] yourself.

Regarding other flash modes, refer to the instruction manual of a Speedlite compatible with the functions.

Wireless functions / Flash ratio control





Wireless (multiple) flash shooting is possible with radio or optical transmission.

For details on wireless flash, refer to the instruction manual of a Speedlite compatible with wireless flash shooting.

With a macro flash (MR-14EX II, etc.) compatible with flash function settings, you can set the flash ratio between flash tubes or flash heads A and B, or use wireless flash with slave units. For details on flash ratio control, refer to the macro flash's instruction manual.

Flash zoom (Flash coverage)



With Speedlites having a zooming flash head, you can set the flash coverage. Normally, set this to [AUTO] so that the camera will automatically set the flash coverage to match the lens focal length.

Shutter synchronization



Normally, set this to [First-curtain synchronization] so that the flash fires immediately after the exposure starts.

If [Second-curtain synchronization] is set, the flash will fire right before the shutter closes. When this is combined with a slow shutter speed, you can create a trail of light such as from car headlights at night with a more natural feel. With second-curtain synchronization, two flashes will be fired: once when you press the shutter button completely, and once immediately before the exposure ends.

If [High-speed synchronization] is set, the flash can be used at all shutter speeds. This is convenient when you want to shoot with background blur (open aperture) in locations such as outdoors in daylight.

Flash exposure compensation



You can set flash exposure compensation up to ±3 stops in 1/3-stop increments.

For details, refer to the Speedlite's instruction manual.

Flash exposure bracketing



While changing the flash output automatically, three shots will be taken. For details, refer to the instruction manual of a Speedlite equipped with flash exposure bracketing.




When using second-curtain synchronization, set the shutter speed to 1/25 sec. or slower. If the shutter speed is 1/30 sec. or faster, first-curtain synchronization will be applied automatically even if [Second-curtain synchronization] is set.



- With an EX-series Speedlite not compatible with flash function settings, you can only set the following: [Flash firing], [E-TTL II meter.], and [Flash exposure compensation] under [Flash function settings]. ([Shutter synchronization] can also be set with certain EX-series Speedlites.)
- If flash exposure compensation is set with the Speedlite, you cannot set the flash exposure compensation with the camera. If it is set with both the camera and Speedlite, the Speedlite's setting overrides the camera's.

Flash Custom Function Settings

For details on the Speedlite's Custom Functions, refer to the Speedlite's (sold separately) instruction manual.










- Select the number, then press < (SET) >.
- Select the setting, then press < (SET) >.



With an EX-series Speedlite, if the [Flash metering mode] Custom Function is set to [TTL flash metering] (autoflash), the Speedlite will always fire at full output.

Clear Settings



Select [Clear settings].

Select the settings to be cleared.

- Select [Clear flash settings] or [Clear all Speedlite C.Fn's], then press < (SET) >.
- On the confirmation dialog, select [OK]. Then the flash settings or Custom Function settings will all be cleared.



The Speedlite's Personal Function (P.Fn) cannot be set or canceled with the camera's [External Speedlite control] screen. Set it with the Speedlite.

MEMO			

Shooting with the LCD Monitor (Live View Shooting)



You can shoot while viewing the picture on the camera's LCD monitor. This is called "Live View shooting".

Live View shooting is enabled by setting the Live View shooting/ Movie shooting switch to < ->.

If you handhold the camera and shoot while viewing the LCD monitor, camera shake can cause blurred images. Using a tripod is recommended.

Remote Live View Shooting

With EOS Utility (EOS software, p.520) installed on your computer, you can connect the camera to the computer and shoot remotely while viewing the computer screen. For details, refer to the EOS Utility Instruction Manual (p.522).

Shooting with the LCD Monitor



Set the Live View shooting/Movie shooting switch to <☐>.



Display the Live View image.

- Press the < START/ > button.
- The Live View image will appear on the LCD monitor.
- The Live View image will closely match the brightness level of the actual image you capture.



Focus on the subject.

 When you press the shutter button halfway, the camera will focus with the current AF method (p.268).

Take the picture.

- Press the shutter button completely.
- The picture is taken and the captured image is displayed on the LCD monitor.
- When the playback display ends, the camera will return to Live View shooting automatically.
- Press the < START/ > button to exit the Live View shooting.



- The image's field of view is approx. 100% (when the image-recording quality is set to JPEG ◢ L with full-frame).
- In the <P> <Tv> <Av> <M> shooting mode, you can check the depth of field by pressing the depth-of-field preview button.
- During continuous shooting, the exposure set for the first shot will also be applied to subsequent shots.
- You can also use a remote controller (sold separately, p.237) for Live View shooting.

Enabling Live View Shooting



Set [\triangle 5: Live View shoot.] (the [\triangle 3] tab in < \triangle >) to [Enable].

Number of Possible Shots with Live View Shooting

(Approx. number of shots)

Temperature	Room Temperature (23°C / 73°F)	Low Temperatures (0°C / 32°F)		
Possible shots	220	210		

- The figures above are based on a fully-charged Battery Pack LP-E6N and CIPA (Camera & Imaging Products Association) testing standards.
- With a fully-charged Battery Pack LP-E6N, total continuous Live View shooting time will be as follows: At room temperature (23°C/73°F): Approx. 1 hr. 45 min., At low temperatures (0°C/32°F): Approx. 1 hr. 40 min.




- Do not point the camera toward an intense light source, such as the sun or an intense artificial light source. Doing so may damage the image sensor or the camera's internal components.
- General Live View Shooting Cautions are on pages 277-278.



- You can also focus by pressing the <AF-ON> button.
- When flash is used, there will be two shutter sounds, but only one shot will be taken. Also, the time it takes to take the picture after you press the shutter button completely will be slightly longer than with viewfinder shooting.
- If the camera is not operated for a prolonged period, the power will turn off automatically after the time set in [¥2: Auto power off] (p.69). If [¥2: Auto power off] is set to [Disable], Live View shooting will end automatically after 30 min. (camera power remains on).
- With the HDMI cable HTC-100 (sold separately), you can display the Live View image on a TV screen (p.351). Note that no sound will be output. If the picture does not appear on the TV screen, set the [♥3: Video system] correctly to [For NTSC] or [For PAL] (depending on the video system of your TV set).

Information Display

 Each time you press the <INFO.> button, the information display will change.

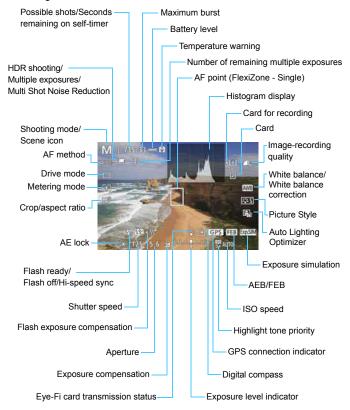



- The histogram can be displayed when [5: Expo. simulation: Enable] (p.265) is set.
- You can display the electronic level by pressing the <INFO.> button (p.75). Note that if the AF method is set to [:+Tracking] or the camera is connected to a TV set with an HDMI cable, the electronic level cannot be displayed.
- When < Is displayed in white, it indicates that the Live View image brightness is close to what the captured image will look like.
- If < TO SIM > is blinking, it indicates that the Live View image is displayed at a brightness that differs from the actual shooting result because of lowor bright-light conditions. However, the actual image recorded will reflect the exposure setting. Note that the noise may be more noticeable than the actual image recorded.
- If Multi Shot Noise Reduction, bulb exposure, or flash is used, the < [35] > icon and histogram will be displayed in gray (just as reference). The histogram may not be properly displayed in low- or bright-light conditions



Do not hold the camera in the same position for long periods of time. Even if the camera does not feel too hot, prolonged contact with the same body part may cause skin redness, blistering or low-temperature contact burns. Using a tripod is recommended for people with circulation problems or very sensitive skin, or when using the camera in very hot places.

Scene Icons

	Subject	et Portrait*1		Non-portrait			
Ва	ckground		Movement	Nature and Outdoor Scene	Movement	Close*2	Background Color
В	right	•		†	OF	*	Gray
	Backlit			11/			Glay
Blue Sky Included		2		†	O F	*	Light blue
	Backlit	11/1		11/		1	Light blue
Sunset *3		<u> </u>		*3	Orange		
Spotlight		4	1			€\$	
Dark		7	(A [†]		*	Dark blue	
	With Tripod	*4*5	*3	*4*5	,	'3	

^{*1:}Displayed only when the AF method is set to [*U+Tracking]. If another AF method is set, the "Non-portrait" icon will be displayed even if a person is detected.

^{*2:}Displayed when the attached lens has distance information. With an Extension Tube or Close-up Lens, the icon displayed may not match the actual scene.

^{*3:}The icon suiting the scene detected will be displayed.

^{*4:}Displayed when all the following conditions apply: The shooting scene is dark, it is a night scene, and the camera is mounted on a tripod.

*5:Displayed with any of the lenses below:

- EF300mm f/2.8L IS II USM EF400mm f/2.8L IS II USM
- EF500mm f/4L IS II USM
 EF600mm f/4L IS II USM
- · Image Stabilizer lenses marketed in 2012 or later.

Final Image Simulation

The final image simulation shows the results of the current settings for Picture Style, white balance and other functions in the Live View image, so you can see what the captured image will look like.

The Live View image will automatically show the effects of the settings listed below.

Final Image Simulation During Live View Shooting

- Picture Style
 - * Sharpness (Strength), contrast, color saturation, and color tone will be reflected.
- White balance
- White balance correction
- Metering mode
- Exposure (with [5: Expo. simulation: Enable] set)
- Depth of field (with depth-of-field preview button ON)
- Auto Lighting Optimizer
- Peripheral illumination correction
- Chromatic aberration correction
- Highlight tone priority
- Crop/aspect ratio (shooting area confirmation)

^{*4+*5:} If the conditions in both *4 and *5 are met, the shutter speed will slow down.

Shooting Function Settings

Crop/Aspect

You can perform crop shooting, or shoot with the set aspect ratio for Live View shooting. To set them with the menu, see page 154. To set them with the Quick Control screen, see the next page.



If you use [. . 3: Custom Controls] to assign [Switch between crop/aspect] to the <M-Fn> button, you can just press the <M-Fn> button while displaying Live View image to switch the Crop/aspect setting. For details, see page 423.



If Crop/aspect is set for Live View shooting, the image's field of view will be approx. 100% (when the image-recording quality is set to JPEG ■L).

WB/@/DRIVE/AF/622/ISO/≈ Settings

When the Live View image is displayed, if you press the <WB•®>, <DRIVE•AF>, <₩•ISO>, or <</p>
> button, the setting screen will appear on the LCD monitor and you can turn the < >> or <>> dial to set the respective shooting function.

By pressing the <WB• > button and then the <**INFO.** > button, you can set WB shift and WB bracketing.



When you set () (Partial metering) or () (Spot metering), a metering circle will be displayed in the center.

Quick Control

In the $\langle P \rangle \langle Tv \rangle \langle Av \rangle \langle M \rangle \langle B \rangle$ modes, the AF method, Drive mode, Metering mode, Crop/aspect ratio, Recording/playing back card and image quality, White balance, Picture Style, and Auto Lighting Optimizer can be set.

In the < (A⁺ > mode, only the functions in bold above can be set.



Press the <Q> button (\$10).

The settable functions will be displayed.

Select a function and set it.

- Use <♣> to select a function.
- The setting of the selected function is displayed on the screen.
- Turn the < 2 > or < > dial to set it.
- To set the RAW image-recording quality, press < (SET) >.
- To select the card for recording/ playing back, WB shift/bracketing, or Picture Style parameters, press the <INFO.> button.
- To set Auto white balance, select [AWB], then press < (SET) >.
- Press < (ET) > to finalize the setting and return to Live View shooting.

MENU Menu Function Settings

15



When the Live View shooting/Movie shooting switch is set to $< \bullet >$, the Live View shooting menu options will appear under the $[\bullet 5]$ and $[\bullet 6]$ tabs (the $[\bullet 3]$ tab in $< \bullet >$).

The settable functions on this menu screen apply only to Live View shooting. They do not work with viewfinder shooting (settings become invalid).

- Live View shooting
 You can set Live View shooting to [Enable] or [Disable].
- AF method

 You can select [::+Tracking] or [FlexiZone Single]. See pages

 268-272 for the AF method
- Continuous AF
 The default setting is [Disable].

When [**Enable**] is set, the camera attains rough focus on the subject continuously. This makes it quicker to achieve focus when you press the shutter button halfway. If [**Enable**] is set, the lens will operate constantly and consume more battery power. This will reduce the number of possible shots due to shorter battery life.

If you want to set the lens's focus mode switch to <**MF**> during Continuous AF, first stop Live View shooting.

Grid display

With [3x3 ‡‡] or [6x4 ‡‡‡], you can display grid lines to help you level the camera vertically or horizontally. Also, with [3x3+diag ‡‡], the grid is displayed together with diagonal lines to help you compose with better balance by aligning the intersections over the subject.

Exposure simulation[★]

Exposure simulation simulates and displays how the brightness of the actual image (exposure) will look.

• Enable (Exp.SIM)

The displayed image brightness will be close to the actual brightness (exposure) of the resulting image. If you set exposure compensation, the image brightness will change accordingly.

• During ♣ (♠DISP / Exp.SIM)

Normally, the image is displayed at the standard brightness to make the Live View image easy to see. The image will be displayed close to the actual brightness (exposure) of the resulting image only while you hold down the depth-of-field preview button.

• Disable (□DSP)

The image is displayed at the standard brightness to make the Live View image easy to see. Even if you set exposure compensation, the image is displayed at the standard brightness.

∩6 *



Silent LV shooting*

Mode 1

You can suppress the camera noise when shooting. Continuous shooting is also possible. If < hr > is set, you can shoot at a maximum continuous shooting speed of approx. 5.0 fps.

Mode 2

When the shutter button is pressed completely, only one shot will be taken. While you keep holding down the shutter button, the camera operation will be suspended. Then when you return to the shutter button's halfway position, the camera operation will resume. The shooting noise is thereby minimized. Even if continuous shooting is set, only a single shot will be taken.

Disable

Be sure to set it to [Disable] if you use a TS-E lens (other than those listed in 🖥 below) for shifting or tilting the lens or if you use an Extension Tube. If [Mode 1] or [Mode 2] is set, the standard exposure may not be obtained, or an irregular exposure may result.



- If you use [Mode 1] with continuous shooting, the [Disable] setting will be applied to the second and subsequent shots.
- When shooting with flash, the [Disable] setting will be applied regardless of the [Silent LV shoot.] setting. (Silent shooting cannot be performed.)
- When using a non-Canon flash unit, set it to [Disable]. The flash will not fire if it is set to [Mode 1] or [Mode 2].
- If [Mode 2] is set and you use a Remote Controller (p.237), the operation will be the same as with [Mode 1].



With the TS-E17mm f/4L or TS-E24mm f/3.5L II lens, you can use [Mode 1] or [Mode 2].

Metering timer[★]

You can change how long the exposure setting is displayed (AE lock time).




Performing any of the following operations will stop Live View shooting. To start Live View shooting again, press the < START/ > button.

• Selecting [3: Dust Delete Data], [4: Clear all camera settings], or [¥4: ☐ firmware ver.].

Using AF to Focus (AF Method)

Selecting the AF Method

You can set the AF method to [: (face)+Tracking] (p.269) or [FlexiZone - Single] (p.271) to suit the shooting conditions or subject. If you want to achieve precise focus, set the lens's focus mode switch to <MF>, magnify the image, and focus manually (p.275).



Select the AF method.

- Under the [♠5] tab (the [♠3] tab in <♠[†]>), select [AF method].
- Select the desired AF method, then press < (\$\varepsilon\varepsi

্র (face)+Tracking: AF এ ্র

The camera detects and focuses on human faces. If a face moves, the AF point < C > also moves to track the face.



- Press the < START/STOP
 button.
- The Live View image will appear on the LCD monitor.

Select an AF point.

- When a face is detected, the < C> frame will appear over the face to be focused on.
- If multiple faces are detected, < >
 will be displayed. Use < ※ > to move
 the < > frame over the face you
 want to focus on
- If no faces are detected, the camera will switch to FlexiZone - Single (p.271).

Focus on the subject.

- Press the shutter button halfway to focus
- When focus is achieved, the AF point will turn green and the beeper will sound
- If focus is not achieved, the AF point will turn orange.

Take the picture.

 Check the focus and exposure, then press the shutter button completely to take the picture (p.256).







Focusing on a subject other than a human face

Press $<\frac{4}{3}>$ or $<\frac{4}{3}>$ and the AF frame $<\frac{8}{3}>$ will appear in the center. Then use $<\frac{4}{3}>$ to move the AF frame over the desired subject. Once the AF frame $<\frac{8}{3}>$ achieves focus, it will track the subject even if the subject moves or if you change the composition.



- If the subject's face is significantly out of focus, face detection will not be possible. Adjust the focus manually (p.275) so that the face can be detected, then perform AF.
- An object other than a human face may be detected as a face.
- Face detection will not work if the face is very small or large in the picture, too bright or too dark, or partially hidden.
- The < >> may cover only part of the face.



- Since AF is not possible with a face or a subject detected near the edge of the picture, the < >> or < > >> will be grayed out. If you press the shutter button halfway in this situation, the subject will be focused on with the FlexiZone Single method.
- The size of the AF frame varies depending on the subject or the setting
 of [12 4: Crop/aspect ratio].

FlexiZone - Single: AF -

The camera focuses with a single AF point. This is effective when you want to focus on a particular subject.



AF point

Display the Live View image.

- Press the < START/ STOP
 button.
- ► The Live View image will appear on the LCD monitor.
- ▶ The AF point <□> will appear.



5

Move the AF point.

- Use < > to move the AF point to where you want to focus. (It cannot be moved to the edge of the screen.)
- Pressing <☆>, <ⓒ>, or <⑪> button will return the AF point to the screen's center



Focus on the subject.

- Aim the AF point over the subject and press the shutter button halfway.
- When focus is achieved, the AF point will turn green and the beeper will sound
- If focus is not achieved, the AF point will turn orange.



Take the picture.

 Check the focus and exposure, then press the shutter button completely to take the picture (p.256).



- The size of the AF point varies depending on the setting of [4: Crop/aspect ratio].
- During movie shooting, if [Movie Servo AF] is set to [Enable], the AF point will be displayed in a larger size.

Notes for AF

AF Operation

- Even when focus is achieved, pressing the shutter button halfway will focus again.
- The image brightness may change during and after the AF operation.
- If the light source changes while the Live View image is displayed, the screen may flicker and focusing may be difficult. If this happens, exit Live View shooting and execute AF under the actual light source.



- If you cannot achieve focus with AF, set the lens's focus mode switch to <**MF>** and focus manually (p.275).
- If you shoot the subject at the periphery and it is slightly out of focus, aim
 the center AF point over the subject you want to focus on, focus again,
 and then take the picture.
- The external Speedlite will not emit the AF-assist beam. However, if an EX-series Speedlite (sold separately) equipped with an LED light is used, the LED light will turn on for AF-assist when necessary.

Shooting Conditions that Make Focusing Difficult

- Subject with low-contrast such as the blue sky, solid-color flat surfaces or when highlight or shadow details are clipped.
- Subjects in low light.
- Stripes and other patterns where there is contrast only in the horizontal direction
- Subjects with repetitive patterns (Example: Skyscraper windows, computer keyboards, etc.).
- Fine lines and subject outlines.
- Under a light source whose brightness, color, or pattern keeps changing.
- Night scenes or dots of light.
- Under fluorescent or LED lighting when the image flickers.
- Extremely small subjects.
- Subjects at the edge of the picture.
- Strongly backlit or reflective subjects (Example: Car with a highly reflective body, etc.)
- Near and distant subjects covered by an AF point (Example: Animal in a cage, etc.)
- Subjects that keep moving within the AF point and will not stay still due to camera shake or subject blur.
- A subject approaching or moving away from the camera.
- Performing AF while the subject is very far out of focus.
- Soft focus effect is applied with a soft focus lens.
- A special effect filter is used.
- Noise (spots, banding, etc.) appears on the screen during AF.



Using AF with any of the following lenses may take longer to achieve focus, or the correct focus may not be achieved.

EF50mm f/1.4 USM, EF50mm f/1.8 II, EF50mm f/2.5 Compact Macro, EF75-300mm f/4-5.6 III, EF75-300mm f/4-5.6 III USM

For information on discontinued lenses, refer to the Canon Web site.

Magnified View for FlexiZone - Single



With [FlexiZone - Single], pressing the <Q > button will magnify the image to check the focus in the following sequence: approx. 6x, then approx. 16x.

- The image will be magnified at the AF point.
- If you press the shutter button halfway, AF will be performed in the magnified view.
- If focusing is difficult in the magnified view, return to the normal view and perform AF.



- Magnified view is not possible with [: +Tracking].
- If AF is performed in the normal view and then magnify the view, accurate focus may not be achieved.
- AF speed differs between normal view and magnified view.
- Continuous AF (p.264) or Movie Servo AF (p.313) does not work during the magnified view.
- The [x6] and [x16] views are always displayed in magnification of the view with [Full-frame] setting, regardless of the [1 4: Crop/aspect ratio] setting.
- During magnified view, achieving focus becomes more difficult due to camera shake. Using a tripod is recommended.



- In magnified view, the exposure is locked. (Shutter speed and aperture will be displayed in red.)


MF: Focusing Manually

You can magnify the image and focus precisely with MF (manual focus).





Magnifying frame



- Turn the lens's focusing ring to focus roughly.
- Display the magnifying frame.
 - Press the <Q > button.
 - The magnifying frame will appear.



Move the magnifying frame.

- Use < >> to move the magnifying frame to the position where you want to focus.
- Pressing < ⊕ >, < ⊕ >, or < ⊕ > button will return the magnifying frame to the screen's center



AE lock

Magnified area position

Magnification (Approx.)

Magnify the image.

- Each time you press the <Q > button, the magnification within the frame will change in the following sequence:
 - → Normal view \rightarrow 1x \rightarrow 6x \rightarrow 16x \rightarrow
- While in magnified view, you can use <⊕> to scroll around the magnified image.

Focus manually.

- While looking at the magnified image, turn the lens's focusing ring to focus.
- After achieving focus, press the <Q > button to return to the normal view.

Take the picture.

Check the exposure, then press the shutter button completely to take the picture (p.256).



- If [4: Crop/aspect ratio] is set to [1.3x (crop)] or [1.6x (crop)], [X1.3] or [X1.6] will be displayed when starting the magnified view.
 - When [1.3x (crop)] or [1.6x (crop)] is set, the magnifying frame will be displayed larger than usual.
 - In magnified view, the exposure is locked. (Shutter speed and aperture will be displayed in red.)



General Live View Shooting Cautions

Image Quality

- When you shoot at high ISO speeds, noise (such as dots of light and banding) may become noticeable.
- Shooting in high temperatures may cause noise and irregular colors in the image.
- If Live View shooting is used continuously for a prolonged period, the camera's internal temperature may rise, and image quality may deteriorate. Always exit Live View shooting when you are not shooting.
- If you shoot a long exposure while the camera's internal temperature is high, image quality may deteriorate. Exit Live View shooting and wait a few minutes before shooting again.

White < < ■> and Red < ■> Internal Temperature Warning Icons

- If the camera's internal temperature increases due to prolonged Live < 1 > icon will appear.
- The white <₩ > icon indicates that the image quality of still photos will deteriorate. It is recommended that you temporarily exit Live View shooting and allow the camera to cool down before shooting again.
- The red <

 > icon indicates that the Live View shooting will soon stop
 • The red < Image: Ima automatically. If this happens, you will not be able to shoot again until the camera's internal temperature decreases. Exit the Live View shooting or turn off the power and let the camera rest for a while.
- Using Live View shooting at a high temperature for a prolonged period will cause the < > or < > icon to appear earlier. When you are not shooting, always turn off the camera.
- If the camera's internal temperature is high, the quality of images shot with high ISO speed or long exposure may deteriorate even before the white < 13 > icon is displayed.

Shooting Results

- In magnified view, the shutter speed and aperture will be displayed in red. If you take the picture in magnified view, the exposure may not come out as desired. Return to the normal view before taking the picture.
- Even if you take the picture in magnified view, the image will be captured in the normal view range.



General Live View Shooting Cautions

Live View Image

- Under low- or bright-light conditions, the Live View image may not reflect the brightness of the captured image.
- Even if a low ISO speed is set, noise may be noticeable in the displayed Live View image under low light. However, when you shoot, the image recorded will have less noise. (The image quality of the Live View image is different from that of the recorded image.)
- If the light source (illumination) within the image changes, the screen may flicker. If this happens, exit Live View shooting and resume Live View shooting under the actual light source.
- If you point the camera in a different direction, it may throw off the Live View image's correct brightness momentarily. Wait until the brightness level stabilizes before shooting.
- If there is a very bright light source in the image, the bright area may appear black on the LCD monitor. However, the actual captured image will correctly show the bright area.
- In low light, if you set the [2: LCD brightness] to a bright setting, noise or irregular colors may appear in the Live View image. However, the noise or irregular colors will not be recorded in the captured image.
- When you magnify the image, the image sharpness may look more pronounced than in the actual image.

Custom Functions

During Live View shooting, some Custom Functions will not work (settings become invalid). For details, see p.400-401.

Lens and Flash

- If the attached lens has an Image Stabilizer and you set the Image Stabilizer (IS) switch to < ON>, the Image Stabilizer will operate at all times even if you do not press the shutter button halfway. The Image Stabilizer consumes battery power and may decrease the number of possible shots. If you use a tripod or if the Image Stabilizer is not necessary, it is recommended that you set the IS switch to <OFF>.
- The focus preset function is possible for Live View shooting only when using a (super) telephoto lens equipped with the focus preset mode. available since the second half of 2011.
- FE lock and modeling flash will not work if an external Speedlite is used.

8

Shooting Movies



Movie shooting is enabled by setting the Live View shooting/ Movie shooting switch to < ♣₹.>.

- For cards that can record movies, see page 5.
- If you handhold the camera and shoot movies, camera shake can cause blurred movies. Using a tripod is recommended.




Full HD 1080 indicates compatibility with High-Definition featuring 1080 vertical pixels (scanning lines).



' Autoexposure Shooting

When the shooting mode is set to $\langle \underline{\mathbb{A}}^+ \rangle$, $\langle \mathbf{P} \rangle$, or $\langle \mathbf{B} \rangle$, autoexposure control will take effect to suit the scene's current brightness. Exposure control will be the same for all the shooting modes.





Set the Live View shooting/Movie shooting switch to <¹──>.

The reflex mirror will make a sound, then the image will appear on the LCD monitor.



Focus on the subject.

- Before shooting a movie, focus with AF or manual focus (p.268-276).
- When you press the shutter button halfway, the camera will focus with the current AF method.



Shoot the movie.

- Press the < START/ > button to start shooting a movie.
- While the movie is being shot, the "●" mark will be displayed on the
 - upper right of the screen.
- Sound will be recorded by the built-in microphone.
- To stop shooting the movie, press the
 STARTV > button again.

Recording movies




Built-in microphone

艸 Shutter-priority AE

When the shooting mode is < Tv>, you can manually set the shutter speed for movie shooting. The ISO speed and aperture will be set automatically to suit the brightness and obtain a standard exposure.



■ Set the Mode Dial to < Tv >.



Set the desired shutter speed.

- While looking at the LCD monitor, turn the < > dial. The settable shutter speeds depend on the frame rate.
 - 29.97P 25.00P 23.98P :

1/4000 sec. - 1/30 sec.

• 5994 5000 : 1/4000 sec. - 1/60 sec.

Focus and shoot the movie.

 The procedure is the same as steps 3 and 4 for "Autoexposure Shooting" (p.280).



Shutter speed





- Changing the shutter speed during movie shooting is not recommended since the changes in the exposure will be recorded.
- When shooting a movie of a moving subject, a shutter speed of 1/30 sec. to 1/125 sec. is recommended. The faster the shutter speed, the less smooth the subject's movement will look.
- If you change the shutter speed while shooting under fluorescent or LED lighting, image flicker may be recorded.

Aperture-priority AE

When the shooting mode is < **Av**>, you can manually set the aperture for movie shooting. The ISO speed and shutter speed will be set automatically to suit the brightness and obtain a standard exposure.




Set the Mode Dial to < Av>.

Set the Live View shooting/Movie shooting switch to <'

¬>.



 While looking at the LCD monitor, turn the < > dial.





Focus and shoot the movie.

 The procedure is the same as steps 3 and 4 for "Autoexposure Shooting" (p.280).



Changing the aperture during movie shooting is not recommended since variations in the exposure, due to the drive of the lens aperture, will be recorded.

ISO Speed in the < A +> Mode

The ISO speed will be set automatically within ISO 100 - ISO 6400.

ISO Speed in the <P>, <Tv>, <Av>, and Modes

- The ISO speed will be set automatically within ISO 100 ISO 6400.
- Under [

 2: ISO speed settings], if you set the [ISO speed range]'s [Maximum] setting to [H (12800)] in the ⟨P⟩, ⟨Av⟩, or ⟨B⟩ mode (p.161), the automatic ISO range will be expanded to H (equivalent to ISO 12800). Even if you set the [Maximum] and [Minimum] to a narrower range than the default ISO range (ISO 100 ISO 6400), it will not take effect.
- If [3: Highlight tone priority] is set to [Enable] (p.187), the automatic ISO range will be ISO 200 - ISO 6400.



If [Minimum] is set to [L(50)] in [ISO speed range], and you switch from still photo shooting to movie shooting, the minimum setting for automatic ISO range for movie shooting will be ISO 100. It cannot be expanded to ISO 50.



Notes for <♠ >, < P>, < Tv>, < Av>, and < B> Modes

- In the < (A⁺) > mode, the scene icon for the scene detected by the camera is displayed on the upper left of the screen (p.285).
- You can lock the exposure (AE lock) by pressing the <★> button (except in the $\langle \overline{A}^{\dagger} \rangle$ mode, p.217). The exposure setting will be displayed for the time length set with [6: Metering timer]. After applying AE lock during movie shooting, you can cancel it by pressing the <- > button. (AE lock setting is retained until you press the <->> button.)
- You can set exposure compensation up to ±3 stops by setting the <LOCK>> switch to the left and turning the <0>> dial (except in the < (At > mode).
- Pressing the shutter button halfway displays the ISO speed and shutter speed at the screen bottom. This is the exposure setting for taking a still photo (p.289). The exposure setting for movie shooting is not displayed. Note that the exposure setting for movie shooting may differ from that for still photo shooting.
- In the $\langle \mathbf{A}^{+} \rangle$, $\langle \mathbf{P} \rangle$, and $\langle \mathbf{B} \rangle$ modes, the shutter speed and aperture will not be recorded in the movie's Exif information

Using an EX-series Speedlite (Sold Separately) Equipped with an LED Light

During movie shooting in the $\langle \mathbf{A}^{\dagger} \rangle$, $\langle \mathbf{P} \rangle$, $\langle \mathbf{T} \mathbf{v} \rangle$, $\langle \mathbf{A} \mathbf{v} \rangle$, and $\langle \mathbf{B} \rangle$ modes, this camera supports the function that turns on the Speedlite's LED light automatically in low-light conditions. For detailed instructions, refer to the EX-series Speedlite's instruction manual.

Scene Icons

During movie shooting in the will be displayed, and the shooting will be adapted to that scene. For certain scenes or shooting conditions, the icon displayed may not match the actual scene.

Subject Background			Non-Por	Pookaround		
		Portrait*1	Nature and Outdoor Scene	Close*2	Background Color	
Bright		2	A [†]	*	Cray	
	Backlit		11/1	1	Gray	
Blue	Sky Included	2	A [†]	*	Light blue	
	Backlit		77	1	Light blue	
Suns	set	*3	**	*3	Orange	
Spotlight		A			Dark blue	
Dark			(A [†]	*		

^{*1:} Displayed only when the AF method is set to [::+Tracking]. If another AF method is set, the "Non-portrait" icon will be displayed even if a person is detected.

^{*2:} Displayed when the attached lens has distance information. With an Extension Tube or Close-up Lens, the icon displayed may not match the actual scene.

^{*3:} The icon suiting the scene detected will be displayed.

Manual Exposure Shooting

You can manually set the shutter speed, aperture, and ISO speed for movie shooting. Using manual exposure to shoot movies is for advanced users.







Shutter speed



Aperture

Set the Mode Dial to $\langle M \rangle$.

Set the Live View shooting/Movie shooting switch to < '♠>.

Set the ISO speed.

- Press the < 22 ·ISO > button.
- The ISO speed setting screen will appear on the LCD monitor.
- Turn the < > dial to set the ISO speed.
- For details on the ISO speed, see the next page.

Set the shutter speed and aperture.

- Press the shutter button halfway and check the exposure level indicator.
- - 29.97P 25.00P 23.98P :

1/4000 sec. - 1/30 sec.

- 59.94P 50.00P: 1/4000 sec. 1/60 sec.
- To set the aperture, turn the <
 dial.
- If it cannot be set, set the <LOCK►>
 switch to the left, then turn the <△>
 or <○> dial.

Focus and shoot the movie.

 The procedure is the same as steps 3 and 4 for "Autoexposure Shooting" (p.280).

ISO Speed in the <M> Mode

- With [Auto] (A), the ISO speed will be set automatically within ISO 100 ISO 6400. Under [△2: ISO speed settings], if you set [ISO speed range]'s [Maximum] setting to [H (12800)] (p.161), the automatic ISO range will not expand to the H maximum. Even if you set the [Maximum] and [Minimum] to a narrower range than the default ISO range (ISO 100 ISO 6400), it will not take effect.
- You can set the ISO speed manually within ISO 100 ISO 6400 in 1/3-stop increments. Under [♠2: ISO speed settings], if you set [ISO speed range]'s [Maximum] setting to [H (12800)], the manual ISO speed setting range's maximum will be expanded to H (equivalent to ISO 12800). You can also set the [Maximum] and [Minimum] to a range narrower than the default range (ISO 100 ISO 6400).
- If [3: Highlight tone priority] is set to [Enable] (p.187), the auto or manual ISO setting range will be ISO 200 or higher.
- Under [□2: ISO speed settings], [Auto ISO range] and [Min. shutter spd.] cannot be set (p.162-163) for movie shooting.




- If [Minimum] is set to [L(50)] in [ISO speed range], and you switch from still photo shooting to movie shooting, the minimum setting for manual ISO range for movie shooting will be ISO 100. It cannot be expanded to ISO 50.
- Changing the shutter speed or aperture during movie shooting is not recommended since the changes in the exposure will be recorded.
- When shooting a movie of a moving subject, a shutter speed of 1/30 sec. to 1/125 sec. is recommended. The faster the shutter speed, the less smooth the subject's movement will look.
- If you change the shutter speed while shooting under fluorescent or LED lighting, image flicker may be recorded.



- Under [.♠.3: Custom Controls], if [511: Expo comp (hold btn, turn), is set (p.423), you can set exposure compensation while Auto ISO is set.
- When Auto ISO is set, you can press the <★> button to lock the ISO speed.
- If you press the <★> button and recompose the shot, you can see the
 exposure level difference on the exposure level indicator (p.289)
 compared to when the <★> button was pressed.
- By pressing the < INFO.> button, you can display the histogram.

Information Display

 Each time you press the <INFO.> button, the information display will change.

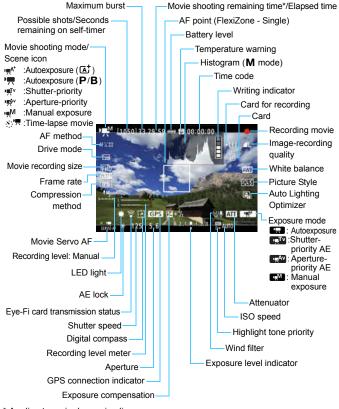

^{*} Applies to a single movie clip.



- You can display the electronic level by pressing the < **INFO**, > button (p.75).
- Note that if the AF method is set to [: +Tracking] or the camera is connected to a TV set with an HDMI cable (p.351), the electronic level cannot be displayed.
- The electronic level, grid lines, or histogram cannot be displayed during movie shooting. (The display will disappear when you start shooting a movie.)
- When movie shooting starts, the movie shooting remaining time will change to the elapsed time.

Cautions for Movie Shooting

- Do not point the camera toward an intense light source, such as the sun or an intense artificial light source. Doing so may damage the image sensor or the camera's internal components.
- If you shoot something that has fine detail, moire or false colors may result.
- Under [¥1: Record func+card/folder sel.], even if [Record func.] is set to [Rec. to multiple] (p.147), the movie cannot be recorded to both the CF card [1] and SD card [2]. If [Rec. separately] or [Rec. to multiple] is set, the movie will be recorded to the card which is set for [Playback].
- If < AVE > or < AVE w> is set and the ISO speed or aperture changes during movie shooting, the white balance may also change.
- If you shoot a movie under fluorescent or LED lighting, the movie may flicker.
- Zooming the lens during movie shooting is not recommended. Zooming the lens may cause changes in the exposure to be recorded regardless of whether the lens's maximum aperture changes or not.
- When an SD card is selected as a card to record images and you cannot shoot movies even if the card still has storage capacity, transfer the images recorded on the card to a computer, etc. then format the card.
- During movie shooting, you cannot magnify the image even if you press the < Q > button.
- Be careful not to cover the built-in microphone (p.280) with your finger, etc.
- [Multi Shot Noise Reduction] (p.183) cannot be set.
- If you connect or disconnect the HDMI cable during movie shooting, the movie shooting will end.
- General Movie Shooting Cautions are on pages 317-318.
- If necessary, also read General Live View Shooting Cautions on pages 277-278.



Notes for Movie Shooting

- Movie-related settings are under the [4] and [5] tabs (p.313). In the <\(\bar{\bar{\Bar}}\) > mode, they are under the [\(\bar{\Bar}\)2] and [\(\bar{\Bar}\)3] tabs.
- A movie file is recorded each time you shoot a movie. If the file size exceeds 4 GB, a new file will be created for every subsequent approx. 4 GB.
- The movie image's field of view is approx. 100% (when the movie recording size is set to FHD).
- You can also focus on the image by pressing the <AF-ON> button.
- Under [♠5: ♠ button function], if [♠AF/'➡] [⑥/'➡] is selected, you can press the shutter button completely to start or stop the movie shooting (p.316).
- Monaural sound is recorded by the camera's built-in microphone (p.280).
- Most external microphones (commercially available) equipped with a 3.5 mm diameter mini plug can be used.
- You can use Remote Controller RC-6 (sold separately, p.237) to start the shooting timing switch to <2> (2-sec. delay), then press the transmit button. If the switch is set to < > (immediate shooting), still photo shooting will take effect.
- With a fully-charged Battery Pack LP-E6N, the total movie recording time will be as follows: At room temperature (23°C/73°F): Approx. 1 hr. 30 min., At low temperatures (0°C/32°F): Approx. 1 hr. 25 min. (with [4: Movie Servo AF: Disable | set).
- The focus preset function is possible for movie shooting when using a (super) telephoto lens equipped with the focus preset mode, available since the second half of 2011



Do not hold the camera in the same position for long periods of time.

Even if the camera does not feel too hot, prolonged contact with the same body part may cause skin redness, blistering or low-temperature contact burns. Using a tripod is recommended for people with circulation problems or very sensitive skin, or when using the camera in very hot places.

Final Image Simulation

The final image simulation shows the results of the current settings for Picture Style, white balance and other functions in the image so you can see what the captured image will look like.

During movie shooting, the image displayed will automatically show the effects of the settings listed below.

Final Image Simulation for Movie Shooting

- Picture Style
 - * Sharpness (Strength), contrast, color saturation, and color tone will be reflected.
- White balance
- White balance correction
- Exposure
- Depth of field (except during time-lapse movie shooting)
- Auto Lighting Optimizer
- Peripheral illumination correction
- Chromatic aberration correction
- Highlight tone priority

Shooting Still Photos



While shooting a movie, you can also take a still photo by pressing the shutter button completely.

Taking Still Photos During Movie Shooting

- If you take a still photo during movie shooting, the movie will record a still moment lasting approx. 1 sec.
- The captured still photo will be recorded to the card, and the movie shooting will resume automatically when the Live View image is displayed.
- The movie and still photo will be recorded as separate files on the card.
- Under [Y1: Record func+card/folder sel.], if [Record func.] (p.146) is set to [Standard] or [Auto switch card], the movies and still photos will be recorded to the same card. If [Rec. separately] or [Rec. to multiple] is set, the movies will be recorded to the card set for [Playback] (p.148). The still photos will be recorded at the image-recording quality set for the respective card.
- Functions particular to still photo shooting are shown below.

Turiotione particular to this priote officering are crieffin below.				
Function	Settings			
Image- recording Quality	As set in [11] 1: Image quality]. When the movie recording size is [1920x1080] or [1280x720], the aspect ratio will be 16:9. When the size is [640x480], the aspect ratio will be 4:3.			
ISO Speed*	• <适 [†] >: ISO 100 - ISO 3200 • < P >, < Av >, and < B >: ISO 100 - ISO 3200 • < Tv >: ISO 100 - ISO 6400 • < M >: See "ISO Speed in the < M > mode" on page 287.			
Exposure Setting	 <(基[†]>, <P>, and <B>: Automatically-set shutter speed and aperture. <Tv>: Manually-set shutter speed and automatically-set aperture. <Av>: Manually-set aperture and automatically-set shutter speed. <M>: Manually-set shutter speed and aperture. 			

^{*} If highlight tone priority is set, the ISO speed range will start from ISO 200.



- If [△5: <a> button function] is set to [②AF/+□] or [③/+□] (p.316), you cannot take still photos.
- Still photo shooting during movie shooting will have approx. 100% coverage with FFHD, EHD, and WGA (when the image-recording quality is set to JPEG ■L).
- AEB cannot be used.
- Even if a flash is used, it will not fire.
- Continuous still photo shooting is possible during movie shooting.
 However, the captured images will not be displayed on the screen.
 Depending on the still photo's image-recording quality, number of shots during continuous shooting, card performance, etc., movie shooting may stop automatically.
- AF is possible during movie shooting. However, the following may occur:
 - · Focus may become far off momentarily.
 - · The brightness of the recorded movie may change.
 - · The recorded movie may be momentarily still.
 - The movie may record the lens operation noise.
 - · If focus cannot be achieved, you cannot shoot still photos.



- Exposure compensation up to ±3 stops can be applied for still photo shooting during movie shooting.
- If you want to shoot still photos continuously during movie shooting, using a high-speed card is recommended. Setting a smaller imagerecording quality for still photos and shooting fewer continuous still photos are also recommended.
- You can shoot still photos in all drive modes.
- The self-timer can be set before you start shooting a movie. During movie shooting, the camera will switch to single-image shooting.

Shooting Function Settings

WB/DRIVE/AF/ISO/≈ Settings

If you press the <WB \cdot \$>, <DRIVE-AF>, < $\$2\cdot$ ISO>, or < \checkmark > button while the image is displayed on the LCD monitor, the setting screen will appear on the LCD monitor and you can turn the < \checkmark > or < \checkmark > dial to set the respective function.

- During manual-exposure shooting (p.286), you can press the
 'SO> button to set the ISO speed.
- By pressing the <WB·
 < > button and then the <INFO. > button, you can set WB shift and WB bracketing.
- Note that the following cannot be set: <

 S Metering mode, <
 Flash exposure compensation, <HDR > HDR mode, and <
 Multiple exposures.

Q Quick Control

In the <**P**>, <**Tv**>, <**Av**>, <**M**>, and <**B**> modes, the **AF method**, **Drive mode**, **Movie recording size**, Recording level (set manually only), **Recording/playing back card and image quality** (still photos), White balance, Picture Style, and Auto Lighting Optimizer can be set. **In the** <**A**[†]> **mode**, **only the functions in bold above** can be set.



Press the <Q> button (₺10).

The settable functions will be displayed.

Select a function and set it.

- Use <♣> to select a function.
- ➤ The setting of the selected function is displayed on the screen.
- Turn the < 2 > or < 0 > dial to set it.
- To set the image quality to RAW, press < (ξΕΤ)>.
- To select the card for recording/ playing back, WB shift/bracketing, or Picture Style parameters, press the <INFO.> button.
- To set Auto white balance, select
 [AWB], then press < (ET) >.
- Pressing < FT > will return the camera to movie shooting.

If you press the <Q> button before starting the time-lapse movie shooting (p.306), recording-level will not be displayed.

MENU Setting the Movie Recording Size



With [♠4: Movie rec. size] (the [♠2] tab in <♠[†]>), you can set the movie's image size, frame rate (frames per sec.), and compression method.

The frame rate displayed on the [Movie rec. size] screen switches automatically depending on the [**¥3: Video system**] setting (p.467).

Image Size

FHD 1920x1080

Full High-Definition (Full HD) recording quality. The aspect ratio is 16:9.

IID 1280x720

High-Definition (HD) recording quality. The aspect ratio is 16:9.

▼GA 640x480

Standard-definition recording quality. The aspect ratio is 4:3.

Frame Rate (fps: frames per second)

29.97 fps/59.94 59.94 fps

For areas where the TV format is NTSC (North America, Japan, South Korea, Mexico, etc.).

25.00 fps/5000 50.00 fps

For areas where the TV format is PAL (Europe, Russia, China, Australia, etc.).

23.98 fps

Mainly for motion pictures.



If you change the [$\uppsi 3$: Video system] setting, set the movie recording size again.

Compression Method

ALL-I (For editing/I-only)

Compresses one frame at a time for recording. Although the file size is larger than with IPB (Standard), the movie is more suited for editing.

IPB IPB (Standard)

Compresses multiple frames at a time efficiently for recording. Since the file size is smaller than with ALL-I (For editing), you can shoot longer (with a card of the same capacity).

Total Movie Recording Time and File Size Per Minute

(Approx.)

Movie Recording Quality		Total Recording Time on Card			File Size	
		4 GB	8 GB	16 GB	File Size	
≅FHĎ	29.97P 25.00P 23.98P	ALL-I	5 min.	11 min.	23 min.	654MB/min.
₽FHD	29.97P 25.00P 23.98P	IPB	16 min.	33 min.	67 min.	225MB/min.
EHD	59.94P 50.00P	ALL-I	6 min.	13 min.	26 min.	583MB/min.
₽HD	59.94P 50.00P	IPB	19 min.	38 min.	1 hr. 17 min.	196MB/min.
ŪĠA	29.97P 25.00P	IPB	48 min.	1 hr. 37 min.	3 hr. 14 min.	78MB/min.



An increase of the camera's internal temperature (p.317) may cause movie shooting to stop before the maximum recording time shown in the table.

Movie Files Exceeding 4 GB

Even if you shoot a movie exceeding 4 GB, you can keep shooting without interruption.

During movie shooting, approx. 30 sec. before the movie reaches the 4 GB file size, the elapsed shooting time or time code displayed in the movie-shooting screen will start blinking. If you keep shooting until the movie file size exceeds 4 GB, a new movie file will be created automatically and the elapsed shooting time or time code will stop blinking.

When you play back the movie, you will have to play each movie file individually. Movie files cannot be played back automatically in consecutive order. After the movie playback ends, select the next movie and play it back.


Movie Shooting Time Limit

The maximum recording time of one movie clip is 29 min. 59 sec. If the movie shooting time reaches 29 min. 59 sec., the movie shooting will stop automatically. You can start shooting a movie again by pressing the < STARTV > button. (A new movie file starts being recorded.)



When shooting movies, if the file size exceeds 4 GB, "buSY" may be displayed on the LCD panel for a while. Still photo shooting is not possible while "buSY" is displayed on the screen.

MENU Setting the Sound Recording



You can shoot movies while recording sound with the built-in monaural microphone or an external stereo microphone (commercially available). You can also freely adjust the sound-recording level.

Sound Recording/Sound-Recording Level

Auto : The sound-recording level is adjusted automatically. Auto level control will operate automatically in response to the

sound level.

Manual : For advanced users. You can adjust the sound-recording level to one of 64 levels

Select [Rec. level] and look at the level meter while turning the < > dial to adjust the sound-recording level. Look at the peak hold indicator, and adjust so that the level meter sometimes lights up on the right of the "12" (-12 dB) mark for the loudest sounds. If it exceeds "0", the

sound will be distorted.

Sound will not be recorded.

Disable

Wind Filter/Attenuator

Wind filter

: When [Enable] is set, it reduces the wind noise when recording outdoors. This feature takes effect only with the built-in microphone. Note that [Enable] reduces low bass sounds, so set it to [Disable] when there is no wind. It will record a more natural sound than with [Enable].

Attenuator

: Automatically suppresses sound distortion caused by loud noises. Even if [Sound rec.] is set to [Auto] or [Manual] before shooting, sound distortion may still result if there is a very loud sound. In such a case, setting it to [Enable] is recommended.

Using a microphone

Normally, the built-in microphone will record monaural sound. Stereo sound recording is also possible by connecting an external stereo microphone (commercially available) equipped with a miniature stereo plug (ϕ 3.5 mm) to the camera's external microphone IN terminal (p.27).



- In the <\(\overline{\Lambda}\)[†] > mode, [Sound recording] can be set to [On] or [Off]. If [On] is set, the sound-recording level will be adjusted automatically (same as with [Auto]), but the wind filter function will not take effect.
- The sound volume balance between L (left) and R (right) cannot be adjusted.
- Audio is recorded at a 48 kHz/16-bit sampling rate.
- If [□5: Silent Control] is set to [Enable ⊕] (p.302), you can adjust the sound-recording level with the <⊕> touch pad with less operation noise during movie shooting.

MENU Silent Control *

You can change the settings of the ISO speed, sound-recording level, etc. without making too much noise while shooting a movie.



When [5: Silent Control] is set to [Enable], you can use the touch pad < >> on the inner ring of the Quick Control Dial.



You can just touch the top, bottom, left, or right of < > for silent operation. During movie shooting, you can press the <Q> button to display the Quick Control screen and change the functions below with < >>.



Settable Functions	Shooting Mode			
Seliable Functions	P/B	Τv	Αv	M
Shutter speed	-	0		0
Aperture	-	-	0	0
Exposure compensation	0	0	0	O* ¹
ISO speed	-	-	-	0
Recording level*2	0	0	0	0

^{*1:} With Auto ISO set.



- If [5: Silent Control] is set to [Enable], you cannot change Quick Control settings with the <>> Quick Control dial during movie shooting.
- Even if you change the aperture silently with <>>, the movie will still record the lens aperture-driving sound.
- If there is water or dirt on the < >>, the touch operation may not work. In such a case, use a clean cloth to clean the <> > . If it still does not work, wait a while and try again.



Before shooting a movie, you can use <>> with the [Rec. level] setting to adjust the sound-recording level.

^{*2:} With [Sound recording: Manual] set.

MENU Setting the Time Code



The time code is a time reference recorded automatically to synchronize the movie during movie shooting. It is recorded at all times in the following units: hours, minutes, seconds, and frames. It is mainly used during movie editing.

Use [\triangle 5: Time code] (the [\triangle 3] tab in < \triangle >) to set the time code.

Count Up

Rec run : The time code counts up only while you are shooting a

movie. The time code will continue in the sequence of the

movie files captured.

Free run : The time code counts up whether you are shooting a

movie or not.

Start Time Setting

You can set the time code's start time.

Manual input setting: You can freely set the hour, minute, second,

and frames.

Reset : The time set with [Manual input setting] and

[Set to camera time] is reset to "00:00:00." or

"00:00:00:" (p.305).

Set to camera time : Sets hours, minutes, and seconds to match the

camera's internal clock. "Frames" will be set to

00.



Shooting still photos during movie shooting will cause a discrepancy between the actual time and time code.

 If [Free run] is set and you change the time, zone, or daylight saving time (p.49), the time code will be affected.

Movie Recording Count

You can select what to display on the movie shooting screen.

Rec time : Indicates the elapsed time from the start of the movie

shooting.

Time code : Indicates the time code during movie shooting.

Movie Playback Count

You can select what to display on the movie playback screen.

Rec time : Displays the recording time and playback time during

movie playback.

Time code: Displays the time code during movie playback.

With [Time code] set:



During movie shooting



During movie playback



- Regardless of the [Movie rec count] setting, the time code will always be recorded to the movie file (except during time-lapse movie shooting).
- The [Movie play count] setting under [
 ☐5: Time code] switches in tandem with the [
 ☐3: Movie play count] setting. Changing either setting will automatically change the other.
- "Frames" are not displayed for movie shooting or during movie playback.

Drop Frame

If the frame rate setting is 29.97 (29.97 fps) or 59.94 (59.94 fps), the time code's frame count causes a discrepancy between the actual time and time code. This discrepancy can be corrected automatically. This correction function is called "drop frame."

Enable: The discrepancy is corrected automatically by skipping time

code numbers (DF: Drop frame).

Disable: The discrepancy is not corrected (NDF: Non-drop frame).


The time code will be displayed as follows:


Enable (DF) : 00:00:00. (Playback time: 00:00:00.00) Disable (NDF) : 00:00:00: (Playback time: 00:00:00:00)

Sing Shooting Time-lapse Movies

Still photos shot at a set interval can be stitched together automatically to create a time-lapse movie. A time-lapse movie shows how a subject changes in a much shorter period of time than the actual time it took. It is effective for a fixed-point observation of changing scenery, growing plants, celestial motion, etc.

Time-lapse movies are recorded in FHD TIME (NTSC) or FHD LIME (PAL). The frame rate will be switched automatically according to the [\forall 3: Video system] setting (p.467).





The image will appear on the LCD monitor



- Under the [□5] tab, select [Time-lapse movie] (the [□3] tab in <□5'>), then press <□5'>.
 - If [Time-lapse movie] is grayed out, press the STARTY > button to enable movie shooting. Then perform step 3 again.
- Select [Enable].
 - Select [Enable], then press < INFO.>.









Do not point the camera toward an intense light source, such as the sun or an intense artificial light source. Doing so may damage the image sensor or the camera's internal components.



Time required Playback time

5 Set the shooting interval and number of shots.

- Check the ['\overline{\textit{\textit{\textit{me required}}}} and [\overline{\textit{\textit{\textit{\textit{time}}}} : Playback time]} displayed at the bottom of the screen to set the shooting interval and number of shots.
- Select the number to be set (hours: minutes: seconds / Number of shots).
- Press <⊕> so < □> is displayed.
- Set the desired number, then press
 <(set)>. (Returns to <□>).
- Shooting interval Settable from [00:00:01] to [99:59:59].
- Number of shots
 Settable from [0002] to [3600]. Set one digit at a time. If 3600 is set, the time-lapse movie will be approx. 2 min. for NTSC and approx. 2 min. 24 sec. for PAI

Time-lapse movie 7 Disable Enable Interval 00:00:10 No. of shots 0750 Time required 02:04:50 Playback time 00:00:25 Card-time left 00:23:04 INTO Adjust interval/shots

Select [OK].

► The screen in step 3 will reappear.

Check the settings.

- With [Time-lapse movie] selected on the screen in step 3, press <
 - The current settings will be displayed.

Time required Indicates the time required to shoot the set number of shots at the set interval. If it exceeds 24 hours. "*** days" will be displayed.

Playback time
Indicates the playback time (time required to play back the movie) of
the time-lapse movie that will be created from the still photos taken
at the set interval and recorded in FHD MIN ALL-I (NTSC) or FHD
MIN ALL-I (PAL).

Card- time left

The total length of a time-lapse movie that can be recorded on the card based on its remaining capacity.

Exit the menu.

 Press the < MENU> button to turn off the menu screen.

Test and set exposure settlings on this screen. Fully press ● to take a test shot. Press I or get ready to shoot the time-lapse movie. OK

Read the message.

Read the message and select [OK].

10 Take test shots.

- Set the exposure and shooting functions, and press the shutter button halfway to focus as you do with Live View shooting.
- Press the shutter button completely to start taking test shots. The test images will be recorded to the card.
- If there are no problems with the test shots, go to the next step.
- To take test shots again, repeat this step.

Press the < START/ > button.

- The camera will be ready to start shooting a time-lapse movie.
- To return to step 9, press the < START/ > button again.





Shots remaining



Time-lapse movie

Shoot the time-lapse movie.

- Press the shutter button halfway to check the focus and exposure.
- Press the shutter button completely to start shooting the time-lapse movie.
- AF will not work during time-lapse movie shooting. The exposure setting for the first shot will be applied to subsequent shots.
- During time-lapse movie shooting, nothing will be displayed on the LCD monitor. < ☆ → will blink on the LCD panel.
- Since the electronic shutter is used for shooting, the reflex mirror and shutter make no operation noise during time-lapse movie shooting.
- When the set number of shots are taken, the time-lapse movie shooting will stop and be automatically canceled.



- Using a tripod is recommended.
- Taking test shots is recommended.
 - Regardless of the [□ 1: Image quality] setting, the time-lapse movie will be recorded in FHD 2000 ALL (NTSC) or FHD 2000 ALL (PAL).
 - To cancel the time-lapse movie shooting before it is completed, either
 press the shutter button completely or press the <\signal April 2</pre>, button ([Disable]
 is set). The time-lapse movie shot so far will be recorded on the card.
- You can play back the shot time-lapse movie with this camera the same way that you play back normal movies.
- If the time required for shooting is 24 hours to 48 hours, "2 days" will be indicated. If three or more days are required, the number of days will be indicated in 24-hour increments.
- Even if the time-lapse movie's playback time is less than 1 sec., a movie file will still be created. For [Playback time], "00:00:00" will be displayed.
- If the shooting time is long, using AC Adapter Kit ACK-E6 (sold separately) is recommended.





- With time-lapse movie set to [Enable], you cannot set [☎4: Movie rec. size] and [43: Video system].
 - If the camera is connected to a computer or printer with the interface cable, or if an HDMI cable is connected to the camera, you cannot select [Enable].
 - The maximum ISO speed will be ISO 3200 in the <P>, <Tv>, <Av>, and modes, and <M > mode with Auto ISO set.
 - Bulb exposure cannot be performed. If the shooting mode is , the operation will be the same as the <**P**> mode.
 - Movie Servo AF will not function.
 - If the shutter speed is 1/30 sec. or slower, the exposure of the movie displayed may not reflect the exposure of the resulting movie.
 - Do not zoom the lens during time-lapse movie shooting. Zooming the lens may cause the image to be out of focus, the exposure to change. and the lens aberration correction not to function properly.
 - When shooting a time-lapse movie under a flickering light, noticeable image flickering, horizontal stripes (noise), or irregular exposures may be recorded
 - The image displayed during time-lapse movie shooting and the resulting movie may look different (in terms of flicker, depth of field, etc.).
 - If you move the camera from left to right (panning) or shoot a moving subject while shooting a time-lapse movie, the image may look extremely distorted
 - During time-lapse movie shooting, auto power off will not operate. Also, you cannot adjust the shooting function and menu function settings, or play back images.
 - Sound and time code are not recorded for time-lapse movies.
 - Single shooting setting is applied to time-lapse movie shooting regardless of the drive mode setting.
 - The shooting function settings for the first shot will be applied to subsequent shots.
 - If a long exposure or shutter speed longer than the shooting interval is set, the camera cannot shoot with the set interval. Also, shooting may not be performed when the shutter speed and the shooting interval are nearly the same.
 - If the next scheduled shot is not possible, it will be skipped. This may make the time-lapse movie's recording time shorter.



- If the time it takes to record to the card exceeds the interval between shots due to the shooting functions set or card performance, some of the shots may not be taken with the set intervals.
 - The captured images are not recorded as still photos. Even if you cancel the time-lapse movie shooting after only one shot is taken, it will be recorded as a movie file.
 - If the card does not have enough free space to record the set number of shots. [Playback time] will be displayed in red. Although the camera can continue shooting, the shooting will stop when the card becomes full.
 - If you connect the camera to a computer with the interface cable provided with the camera and use EOS Utility (EOS software), set [5: Time-lapse movie) to [Disable]. If it is set to [Enable], the camera cannot communicate with the computer.
 - During time-lapse movie shooting, the lens's Image Stabilizer will not operate.
 - If the power switch is set to <OFF> or the Live View shooting/Movie shooting switch is operated, time-lapse movie shooting will be terminated and the setting is switched to [Disable].
 - Even if a flash is used, it will not fire.
 - Shooting-ready state of the time-lapse movie is canceled and the setting is switch to [Disable] with any of the following operations:
 - Selecting [3: Dust Delete Data], [3: Sensor cleaning], [4: Clear all camera settings], or [4: firmware ver.].
 - Selecting < 1>, < 2>, or < 5> shooting modes.
 - When time-lapse movie shooting ends, the settings are cleared automatically, and you return to normal movie shooting. Note that if you have set the shutter speed slower than 1/60 sec. or faster than 1/4000 sec. for time-lapse movie shooting and the settings are automatically cleared, the shutter speed may be automatically changed to a speed within the settable range for normal movie shooting.
 - If you start time-lapse movie shooting while the white < \$\mathbb{M}\$ > (p.317) is displayed, the image quality of the time-lapse movie may deteriorate.





You can perform time-lapse movie shooting with a fully-charged Battery Pack LP-E6N for the durations (from start of shooting until the battery is exhausted) listed in the table below.

Total Possilbe Time for Time-lapse Movie Shooting

	Room Temperature (23°C / 73°F)	Low Temperatures (0°C / 32°F)
Shooting interval: 1sec.	2 hr. 15 min.	2 hr. 10 min.
Shooting interval: 10sec.	4 hr. 5 min.	3 hr. 55 min.



If you use Remote Controller RC-6 (sold separately, p.237), you can start or stop the time-lapse movie shooting with the drive mode set to $\langle | \rangle > \text{or } \langle | \rangle >$

When Using Remote Controller RC-6

Camera Status/Remote Control Setting	<2> (2-sec. delay)	< > (Immediate shooting)	
Test-shooting screen	To shooting-ready	Shoots still photo	
Shooting-ready	To test-shooting screen	Starts shooting	
During time-lapse movie shooting	Ends shooting	Ends shooting	

MENU Menu Function Settings

Q4



When the Live View shooting/Movie shooting switch is set to < ¹元>, the movie shooting menu options will appear under the [□4] and [□5] tabs (the [□2] and [□3] tabs in < □5).

Movie Servo AF

During movie shooting, the camera focuses on the subject continuously. The default setting is [**Disable**].

When [Enable] is set:

- The camera focuses on the subject continuously even when you are not pressing the shutter button halfway.
- Since this drives the lens continuously, it will consume battery power and shorten the total possible movie shooting time (p.291).
- With certain lenses, the lens operation noise during focusing may be recorded. If this happens, use an external microphone (commercially available) to reduce lens operation noise in the movie.
- If you want to set the lens's focus mode switch to <MF> during Movie Servo AF, first set the Live View shooting/Movie shooting switch to <□>.

- If you want to keep the focus at a specific point or you do not want the lens operation noise to be recorded, you can temporarily stop Movie Servo AF by pressing the button assigned to [Pause Movie Servo AF] or [AF stop] under [. . . . 3: Custom controls]. When you stop Movie Servo AF, the AF point will turn gray.
 - Under [. 3: Custom controls], if a button is assigned to [Pause Movie Servo AF] (p.421), Movie Servo AF will stop while holding down that button. When you press the button again, Movie Servo AF will resume.
 - If a button is assigned to [AF stop] (p.419), Movie Servo AF will stop while holding down that button. When you let go of the button, Movie Servo AF will resume.
- When Movie Servo AF is paused, if you return to movie shooting after pressing the <MENU> or <I>> button or performing other operations such as changing the AF method, Movie Servo AF will resume automatically.

When [Disable] is set:

 Press the shutter button halfway or press the <AF-ON> button to focus



Cautions When [Movie Servo AF] is Set to [Enable]

- Shooting Conditions that Make Focusing Difficult
 - · A fast-moving subject approaching or moving away from the camera.
 - · A subject moving at a close distance in front of the camera.
 - · Also see "Shooting Conditions that Make Focusing Difficult" on page 273.
- Movie Servo AF will pause during zooming or magnified view.
- During movie shooting, if a subject approaches or moves away or if the camera is moved vertically or horizontally (panning), the recorded movie image may momentarily expand or contract (change in image magnification).

AF method

You can select [: +Tracking] or [FlexiZone - Single] (p.269-272).

Grid display

With [3x3 ‡‡] or [6x4 ‡‡‡], you can display grid lines to help you level the camera vertically or horizontally. Also, with [3x3+diag ‡‡], the grid is displayed together with diagonal lines to help you compose with better balance by aligning the intersections over the subject.

Note that the grid is not displayed during movie shooting.

Movie recording size

You can set the movie recording size (image size, frame rate, and compression method). For details, see page 297.

Sound recording

You can set sound-recording settings. For details, see page 300.

\(\Omega\) 5



Silent LV shooting [★]

This function applies to still photo shooting. For details, see page 266

Metering timer[★]

You can change how long the exposure setting is displayed (AE lock time).

Time code

You can set the time code. For details, see pages 303-305.

Silent Control [★]

When [Enable ♠] is set, you can use the touch pad <♠> and Quick Control screen to change settings silently during movie shooting. For details, see page 302.

Sutton function *

You can set the functions performed by pressing the shutter button halfway or completely during movie shooting.

Setting	Pressed Halfway	Pressed Completely
®AF/♠	Metering and AF	Still photo shooting
(3) €	Metering only	Still photo shooting
®AF/³₩	Metering and AF	Starts/stops movie shooting
③ / ' ──	Metering only	Starts/stops movie shooting

If [②AF/"\□] or [③/"\□] is set, besides pressing the <\frac{\frac



General Movie Shooting Cautions

White < < □ > and Red < □ > Internal Temperature Warning Icons

- If the camera's internal temperature increases due to prolonged movie shooting. or under a high ambient temperature, a white < 18 > or red < 18 > icon will appear.
- The white < 1 > icon indicates that the image quality of still photos will deteriorate. It is recommended that you stop still photo shooting for a while and allow the camera to cool down. Since movie image quality will hardly be affected, you can still shoot movies.
- The red <

 | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | The red < | automatically. If this happens, you will not be able to shoot again until the camera's internal temperature decreases. Turn off the power and let the camera rest for a while.
- Shooting a movie at a high temperature for a prolonged period will cause the < 1 > or < 100 > icon to appear earlier. When you are not shooting, always turn off the camera.

Recording and Image Quality

- If the attached lens has an Image Stabilizer and you set the Image Stabilizer (IS) switch to < **ON**>, the Image Stabilizer will operate at all times even if you do not press the shutter button halfway. The Image Stabilizer consumes battery power and may shorten the total movie shooting time or decrease the number of possible shots. If you use a tripod or if the Image Stabilizer is not necessary, it is recommended that you set the IS switch to <OFF>.
- The camera's built-in microphone will also pick up camera operation noise. Use an external microphone (commercially available) to reduce camera operation noise in the movie.
- Do not connect anything other than an external microphone to the camera's external microphone IN terminal.
- With autoexposure shooting or shutter-priority AE, if the brightness changes during movie shooting, the movie may freeze temporarily. In such cases, shoot movies with aperture-priority AE or manual exposure.
- If there is a very bright light source in the image, the bright area may appear black on the LCD monitor. The movie will be recorded almost exactly as it appears on the LCD monitor.
- In low light, noise or irregular colors may appear in the image. The movie will be recorded almost exactly as it appears on the LCD monitor.
- If you play back a movie with other devices, image or sound quality may deteriorate or playback may not be possible (even if the devices support MOV format).



General Movie Shooting Cautions

Recording and Image Quality

If you use a card with a slow writing speed, a five-level indicator may appear on the right of the screen during movie shooting. It indicates how much data has not vet been written to the card (remaining capacity of the internal buffer memory). The slower the card, the faster the indicator will climb upward. If the indicator becomes full, movie shooting will stop automatically. If the card has a fast writing speed, the indicator will either not appear or the level (if displayed) will hardly go upward. First. shoot a few test movies to see if the card can write fast enough.



Indicator

- If the indicator indicates that the card is full and movie shooting stops automatically, the sound near the end of the movie may not be recorded properly.
- If the card's writing speed decreases (due to fragmentation) and the indicator appears, formatting the CF card (p.67) or low-level formatting of the SD card (p.67-68) may resolve the problem.

Still Photo Shooting during Movie Shooting

Regarding the image quality of still photos, see "Image Quality" on page 277.

9

Image Playback

This chapter explains how to play back or erase photos and movies, how to display them on a TV screen, and other playback-related functions.

Images shot and saved with another device

The camera may not be able to properly display images captured with a different camera, edited with a computer, or that have had their file names changed.

Image Playback

Single-Image Display





Play back the image.

- Press the < ►> button.
- The last image captured or played back will appear.

Select an image.

- To play back images starting with the last image captured, turn the <0> dial counterclockwise. To play back images starting with the first captured image, turn the dial clockwise.
- Each time you press the <INFO.> button, the information display will change.



No information



Basic information display



Shooting information display




When you play back RAW images shot with the [4: Crop/aspect ratio] (p.154) set, lines indicating the shooting area will be displayed.

Exit the image playback.


Press the < >> button to exit the image playback and return to shooting-ready state.

Shooting Information Display

With the shooting information screen displayed (p.320), you can tilt < ∜> up or down to change the shooting information displayed at the screen's bottom as follows. For details, see pages 323-324.



WENU Grid Display



In single-image display and two-image display (p.332), you can overlay the grid on the image playback.


With [▶3: Playback grid], you can select [3x3 ‡‡], [6x4 ‡‡], or [3x3+diag ‡‡].

This function is convenient for checking the image's vertical or horizontal tilt as well as composition.

INFO.: Shooting Information Display

Sample Information for Still Photos

Basic information display






- If the image was taken by another camera, certain shooting information may not be displayed.
- It may not be possible to play back images taken with the EOS 5DS/EOS 5DS R on other cameras.


Shooting information display

Detailed information



- * When you shoot in RAW+JPEG image quality, the RAW image file size will be displayed.
- * Lines indicating the shooting area will be displayed for images taken with the crop/aspect ratio set and with RAW or RAW+JPEG set for image quality.
- * Lines indicating the shooting area will be displayed for images with cropping information appended (p.411).
- * During flash photography without flash exposure compensation, < 2 > will be displayed.
- * <HDR > and the dynamic range adjustment amount will be displayed for images shot with HDR shooting.
- * < >> will be displayed for multiple-exposure photos.
- * < will be displayed for images shot with Multi Shot Noise Reduction.
- * For still photos taken during movie shooting, < , > will be displayed.
- * For images that are processed (RAW processing function, resized, or cropped) and then saved, < > will be displayed.
- * For images cropped and then saved, < \ddagger > will be displayed.

Lens/Histogram information




White balance information



Picture Style information 2



Picture Style information 1



Color space / Noise reduction information




Lens aberration correction information





If you used GPS Receiver GP-E2 to record GPS information for the image, tilt < >> up or down to view the "GPS information" screen.

Sample Movie Information Display

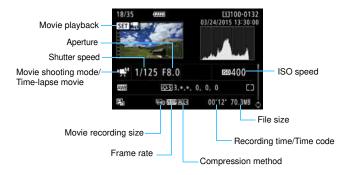

- <_m⁴> and <^m_m> modes: Shutter speed, aperture and ISO speed are not displayed.
- < my > mode: Aperture and ISO speed are not displayed.
- < mover > mode: Shutter speed and ISO speed are not displayed.
- <¬mM > mode + Auto ISO: ISO speed is not displayed.

Highlight Alert

When [**3:** Highlight alert] is set to [Enable], overexposed, clipped highlights will blink. To obtain more image detail in the overexposed, blinking areas, set the exposure compensation to a negative amount and shoot again.

AF Point Display

When [**\rightarrow** 3: **AF point disp.**] is set to [**Enable**], the AF point that achieved focus will be displayed in red. If automatic AF point selection is set, multiple AF points may be displayed.

Histogram

The brightness histogram shows the exposure level distribution and overall brightness. The RGB histogram is for checking the color saturation and gradation. The display can be switched with [3: Histogram disp.].

[Brightness] Display

This histogram is a graph showing the distribution of the image's brightness level. The horizontal axis indicates the brightness level (darker on the left and brighter on the right), while the vertical axis indicates how many pixels exist for each brightness level. The more pixels there are toward the left, the darker the image. The more pixels there are toward the right, the brighter the image. If there are too many pixels on the left, the shadow detail will be lost. If there are too many pixels on the right, the highlight detail will be lost. The gradation in-

Sample Histograms







between will be reproduced. By checking the image and its brightness histogram, you can see the exposure level inclination and the overall gradation.

[RGB] Display

This histogram is a graph showing the distribution of each primary color's brightness level in the image (RGB or red, green, and blue). The horizontal axis indicates the color's brightness level (darker on the left and brighter on the right), while the vertical axis indicates how many pixels exist for each color brightness level. The more pixels there are toward the left, the darker and less prominent the color. The more pixels there are toward the right, the brighter and denser the color. If there are too many pixels on the left, the respective color information will be lacking. If there are too many pixels on the right, the color will be too saturated with no gradation. By checking the image's RGB histogram, you can see the color's saturation and gradation condition, as well as white balance inclination

▶ Searching for Images Quickly

■ Display Multiple Images on One Screen (Index Display)

You can search for images quickly with the index display showing 4, 9, 36, or 100 images on one screen.





Press the <Q> button.

- During image playback or when the camera is ready to shoot, press the <Q > button.
- ▶ [△ Q] will be displayed on the lower right of the screen.

Switch to the index display.

- Turn the < > dial counterclockwise.
- The 4-image index display will appear. The selected image is highlighted with an orange frame.
- Turning the < > > dial further counterclockwise will switch the display from 9 images, 36 images and to 100 images. If you turn the dial clockwise, it will rotate through 100, 36, 9, 4, and single-image display.















Select an image.

- Operate <⊕> or the <●> dial to move the orange frame and select the image.
- Press the <Q > button to turn off the
 Q] icon, then turn the <
 dal to go to the next screen or previous image.
- Press < in the index display to display the selected image in the single-image display.

In the single-image display, you can turn the < >> dial to jump through the images forward or backward according to the jump method set.





Under the [▶2] tab, select [Image jump wl △], then press < (sr)>.



Select the jump method.

- Select the jump method, then press <(EF)>.
 - : Display images one by one
 - 10: Jump 10 images
 - **∭**: Jump 100 images
 - **:** Display by date
 - : Display by folder

 - : Display stills only
 - : Display protected images only
 - **∷**: **Display by image rating** (p.337)

 Turn the < ○○> dial to select.



Jump method Playback position

Browse by jumping.

- Press the < ▶> button to play back images.
- In the single-image display, turn the < ঐ > dial.
- You can browse by the method that was set.



- To search images by shooting date, select [Date].
 - To search images by folder, select [Folder].
 - If the card contains both movies and still photos, select [Movies] or [Stills] to display one or the other.
 - If no images match the [Protect] or [Rating] setting, you cannot browse through images with the < > dial.

Q Magnifying Images

You can magnify a captured image by approx. 1.5x to 16x on the LCD monitor.





Magnified area position





Magnify the image.

- The image can be magnified as follows: 1. During image playback (single-image display), 2. During the image review after image capture, and 3. From the shooting-ready state.
- Press the <Q > button.
- The magnified view will appear. The magnified area and [△ Q] will be displayed on the lower right of the screen.
- The image magnification increases as you turn the < >> dial clockwise.
 You can magnify the image up to approx. 16x.
- The image magnification decreases as you turn the < > dial counterclockwise. In the case of 1 and 3 only, turning the dial further will display the index display (p.327).

Scroll around the image.

- Use < >> to scroll around the magnified image.
- To exit the magnified view, press the < Q > button or < ►> button and the single-image display will return.



- In the case of 1 and 3 only, you can turn the < > dial to view another image while the magnification is maintained.
- A movie cannot be magnified.

MENU Magnification Settings



Under the [▶3] tab. when you select [Magnificatn (apx)], you can set the starting magnification and initial position for the magnified view.



1x (no magnification)

The image is not magnified. The magnified view will start with the single-image display.

- 2x, 4x, 8x, 16x (magnify from center)
 - The magnified view starts at the image center at the selected magnification.
- Actual size (from selected point)

The recorded image's pixels will be displayed at approx. 100%. The magnified view starts at the AF point that achieved focus. If the photo is taken with manual focus, the magnified view starts at the image center.

Same as last magnification (from center)

The magnification will be the same as the last time you exited the magnified view with the < >> or < Q > button. The magnified view starts at the image center.



For images taken with [:+Tracking] or [FlexiZone - Single] (p.268), the magnified view will start at the image center even if [Actual size (from selected pt)] is set.

□ Comparing Images (Two-Image Display)

You can compare two images side by side on the LCD monitor. In the two-image display, you can use magnified view or jump display as well as protection, rating and erasure of images.







Set the two-image display.

- During image playback, press the < □ > button.
- The two-image index display will appear. The currently-selected image will be highlighted with an orange frame.

Select the images to be compared.


- Pressing < set) > switches the orange frame between the two images.
- Turn the < >> dial to select an image.
- Repeat this procedure to select the other image to be compared.
- If the left and right images are the same, the [➡] icon will appear on the upper left of both images.
- By pressing the <Q> button, you can set the same magnification and magnified area for both images. (The magnification settings will match those of the image not highlighted with an orange frame.)
- By holding the < >> button, you can display the image highlighted with the orange frame as a single image.
- To return to the previous display, press the < □ > button.



- By pressing the **INFO.** button, you can change the information display.
- You cannot play back movies in the two-image display.

Rotating the Image

You can rotate the displayed image to the desired orientation.



Select [Rotate image].

Under the [▶1] tab, select [Rotate image], then press <(sī)>.



Select an image.

- Turn the <>> dial to select the image to be rotated.
- You can also select an image in the index display (p.327).



Rotate the image.

- Each time you press <(sī)>, the image will rotate clockwise as follows: 90° → 270° → 0°.
- To rotate another image, repeat steps 2 and 3.





- If you set [¥1: Auto rotate] to [On □ □] (p.362) before taking vertical shots, you need not rotate the image as described above.
- A movie cannot be rotated.

Protecting Images

You can protect important images from being accidentally erased by the camera's erase function.

MENU Protecting a Single Image





Under the [▶1] tab, select [Protect images], then press <(₺)>.



Select [Select images].

An image will be displayed.



Select an image.


- Turn the < >> dial to select the image to be protected.
- You can also select an image or movie on the index display (p.327).

Protect the image.

- Press <(xi) > to protect the selected image. The <(xi>) icon will appear at the top of the screen.
- To cancel the image protection, press ⟨ᢎ̄т⟩ again. The ⟨⟩ icon will disappear.
- To protect another image, repeat steps 3 and 4.

MENU Protecting All Images in a Folder or on a Card

You can protect all the images in a folder or on a card at once.



When you select [All images in folder] or [All images on card] in [1:1:1:1:2]

Protect images], all the images in the folder or on the card will be protected. To cancel the image protection, select [Unprotect all images in folder] or [Unprotect all images on card].



If you format the card (p.67), the protected images will also be erased.




- Movies can also be protected.
- Once an image is protected, it cannot be erased by the camera's erase function. To erase a protected image, you must first cancel the protection.
- If you erase all the images (p.360), only the protected images will remain. This is convenient when you want to erase unnecessary images all at once.
- When [All images on card] or [Unprotect all images on card] is selected, the images will be protected or unprotected on the card selected for [Record/play] or [Playback] under [\$1: Record func+card/folder sel.].

Protecting Images with the <RATE> Button

During image playback, you can use the **<RATE>** button to protect an image.





Under the [¥3] tab, select [RATE button function], then press <(st)>.



Select [Protect].



Select an image.

- Press the < ►> button to play back images.
- Turn the < >> dial to select the image to be protected.
- You can also select an image or movie on the index display (p.327).



Protect the image.

- When you press the <RATE> button, the image will be protected and the < >> icon will appear.
- To cancel the image protection, press the <RATE> button again. The <icon will disappear.

Setting Ratings

You can rate images (still photos and movies) with one of the five rating marks: [*]/[*]/[*]/[*]. This function is called rating.

Rating Images with the <RATE > Button





Select an image.

- During image playback, turn the
 dial to select an image or movie to be rated.
- You can also select an image or movie on the index display (p.327).

Rate the image.

- Each time you press the <RATE> button, the rating mark will change: [-]/[-]/[:]/[:]/[:]/None.
- To rate another image, repeat steps 1 and 2.



- If [¥3: RATE btn function] is set to [Protect], change it to [Rating].
- If you press the <Q> button when [Rating] is selected in [Y3: AMB btn function], you can set the rating marks that can be selected when you press the <RATE> button.

MENU Setting Ratings with the Menu







Select [Rating].

 Under the [▶2] tab, select [Rating], then press <(st)>.

Select an image.

- Turn the <>> dial to select an image or movie to be rated.
- If you press the <Q > button and turn the <△> dial counterclockwise, you can select an image from a threeimage display. To return to the singleimage display, turn the <△> dial clockwise.

Rate the image.

- Press < (x) > and a blue highlight frame will appear as shown in the screenshot.
- Turn the < >> dial to select a rating, then press < (FT) >.
- When you set a rating mark to the image, the total number of the images displayed beside the rating mark will be counted up.
- To rate another image, repeat steps 2 and 3.



A total of up to 999 images of a given rating can be displayed. If there are more than 999 images with a given rating, [###] will be displayed.



Taking Advantage of Ratings

- With [▶2: Image jump w/ △], you can display only images having the specified rating.
- With [▶2: Slide show], you can play back only images with a specific rating.
- With Digital Photo Professional (EOS software, p.520), you can select only the image with a specific rating (still photos only).
- With Windows 8.1, Windows 8, Windows 7, etc., you can see each file's rating as part of the file information display or in the provided image viewer (JPEG images only).

Q Quick Control for Playback

During playback, you can press the <<a>> button to set the following: [o¬: Protect images], [□: Rotate image], [★: Rating], [♣₩]: RAW image processing (RAW images only)], [□: Resize (JPEG image only)], [□: Cropping (JPEG images only)], [♠: Highlight alert], [♠: AF point display], and [♠: Image jump w/ △:]. For movies, only the functions in bold above can be set.





Press the <Q> button.

- During image playback, press the
 Q> button.
- ▶ The Quick Control options will appear.

Select an item and set it.

- Tilt < >> up or down to select a function
- The setting of the selected function is displayed at the bottom.
- Turn the < >> dial to set it.
- For RAW image processing, Resize, and Cropping, press < (x) > and set the function. For details, see page 364 for RAW image processing, page 369 for Resize, and page 371 for Cropping. To cancel, press the < MENU > button.

Exit the setting.

 Press the <Q> button to exit the Quick Control screen.



● To rotate an image, set [1: Auto rotate] to [On 2]. If [On 2] or [Off] is set, the [Rotate image] setting will be recorded to the image, but the camera will not rotate the image for display.



- Pressing the < | > button during the index display will switch to the single-image display and the Quick Control screen will appear. Pressing the < Q > button again will return to the index display.
- For images taken with another camera, the options you can select may be restricted.

¹ ── Enjoying Movies

You can play back movies in the following three ways:

Playback on a TV Set

(p.351)



By connecting the camera to a TV set with HDMI Cable HTC-100 (sold separately), you can play back the camera's still photos and movies on the TV set



- Since hard disk recorders do not have an HDMI IN port, the camera cannot be connected to a hard disk recorder with an HDMI cable.
- Even if the camera is connected to a hard disk recorder with a USB cable, movies and still photos cannot be played back or saved.

Playback on the Camera's LCD Monitor (p.344-345)



You can play back movies on the camera's LCD monitor. You can also edit out the movie's first and last scenes, and play back the still photos and movies on the card in an automatic slide show.



A movie edited with a computer cannot be rewritten to the card and played back with the camera.

Playback and Editing with a Computer



To play back or edit a movie, use preinstalled or general-purpose software, compatible with the movie's recording format



If you play back or edit a movie with commercially-available software, use software compatible with MOV-format movies. For details on commerciallyavailable software, contact the software manufacturer.

¹ ── Playing Back Movies



Play back the image.

Press the < >> button to display an image.





Select a movie.

- Turn the <>> dial to select the movie to be played.
- With the single-image display, the
 Image: icon displayed on the upper left indicates a movie.
- In the index display, perforations at the left edge of a thumbnail indicate a movie. As movies cannot be played from the index display, press <(ET) > to switch to the single-image display.

In the single-image display, press <():)-.

The movie playback panel will appear at the bottom of the screen.





Speaker

Play back the movie.

- Select [►] (Play), then press < (st)>.
- The movie will start playing back.
- You can pause the movie playback by pressing <(FT)>.
- You can adjust the sound volume during movie playback by turning the <>> dial.
- For more details on the playback procedure, see the next page.



The camera may not be able to play back movies shot with another camera.

Movie Playback Panel

Operation	Playback Description
► Play	Pressing <) toggles between play and stop.
I► Slow motion	Adjust the slow motion speed by turning the < > > dial. The slow motion speed is indicated on the upper right of the screen.
₩ First frame	Displays the movie's first frame.
Il Previous frame	Each time you press $<$ \in , the previous frame is displayed. If you hold down $<$ \in , it will rewind the movie.
II▶ Next frame	Each time you press <@>>, the movie will play frame-by-frame. If you hold down <@>>, it will fast forward the movie.
	Displays the movie's last frame.
% Edit	Displays the editing screen (p.346).
	Playback position
mm' ss"	Playback time (minutes:seconds with [Movie play count: Rec time] set)
hh:mm:ss.ff (DF) hh:mm:ss:ff (NDF)	Time code (hours:minutes:seconds:frames with [Movie play count: Time code] set)
✓ ✓ Volume	Turn the < > dial to adjust the volume of the built-in speaker (p.344).
MENU 5	To return to the single-image display, press the < MENU > button.




- With a fully-charged Battery Pack LP-E6N, the continuous playback time at room temperature (23°C/73°F) will be approx. 3 hr. 20 min.
- If you connect the camera to a TV set to play back a movie (p.351), adjust the sound volume with the TV set. (Turning the <a>> dial will not change the sound volume.) If there is audio feedback, place the camera farther away from the TV set or turn down the TV sound volume.
- If you take a still photo during movie shooting, the still photo will be displayed for approx. 1 sec. during the movie playback.

★ Editing a Movie's First and Last Scenes

You can edit out the first and last scenes of a movie in approx. 1-sec. increments. You can also edit time-lapse movies.





▶ The movie editing panel will be displayed at the bottom of the screen.



Specify the part to be edited out.

- Select either [¾□] (Cut beginning) or [□¼] (Cut end), then press < (๑).
- Tilt <♣> to the left or right to see the previous or next frames. Holding down the key will fast forward or fast rewind the frames. Turn the < ○> dial for frame-by-frame playback.
- After deciding which part to edit out, press < (ET) >. The portion highlighted in white on the top of the screen is what will remain.



Check the edited movie.

- Select [▶] and press <(ET) > to play back the edited movie.
- To change the editing, go back to step 2.
- To cancel the editing, press the <MENU> button, then select [OK] on the confirmation dialog.



Save the edited movie.

- Select [□], then press <(□)>.
- The save screen will appear.
- To save it as a new movie, select [New file]. To save it and overwrite the original movie file, select [Overwrite], then press <(ET)>.
- On the confirmation dialog, select [OK] to save the edited movie and return to the movie playback screen.



- Since the editing is performed in approx. 1-sec. increments (position indicated by [¾] on the top of the screen), the actual position where the movie is edited may differ from the position you specified.
- If the card does not have enough free space, [New file] will not be available.
- When the battery level is low, movie editing is not possible. Use a fullycharged battery.
- Movies shot with another camera cannot be edited with this camera.

MENU Slide Show (Auto Playback)

You can play back the images on the card as an automatic slide show.



Select [Slide show].

 Under the [▶2] tab, select [Slide show], then press <(□)>.

Number of images to be played back



Select the images to be played back.

 Select the desired option on the screen, then press <(SET)>.

All images/Movies/Stills/Protect

Date/Folder/Rating

- Select one of the following: [■Date]
 [■Folder] [★ Rating].
- When < NFO √P > is highlighted, press the < NFO, > button.
- Select the desired setting, then press <§ET)>.

Date



Select folder (I)
100EOSSD 28
101EOSSD 5
102EOSSD 12

Folder



Item	Playback Description
□ All images	All the still photos and movies on the card will be played back.
Date	Still photos and movies taken on the selected shooting date will be played back.
Folder	Still photos and movies in the selected folder will be played back.
' ™ Movies	Only the movies on the card will be played back.
Stills	Only the still photos on the card will be played back.
От Protected	Only the protected still photos and movies on the card will be played back.
★ Rating	Only the still photos and movies with the selected rating will be played back.



Configure [Set up] as desired.

- Select [Set up], then press <(ET)>.
- Set the [Display time] and [Repeat] settings for still photos.
- After completing the settings, press the < MENU > button.





Repeat





The images on the card selected for [Record/play] or [Playback] under [\forall 1: Record func+card/folder sel.] will be played back.





Start the slide show.

- Select [Start], then press < (str) >.
- After [Loading image...] is displayed, the slide show will start.



Exit the slide show.

 To exit the slide show and return to the setting screen, press the < MENU> button.




- To pause the slide show, press <(€F)>. During pause, [II] will be displayed on the upper left of the image. Press <(€F)> again to resume the slide show
- During auto playback, you can press the <INFO.> button to change the still photo display format (p.320).
- During movie playback, you can adjust the sound volume by turning the
 dial.
- During auto playback or pause, you can turn the <>> dial to view another image.
- During auto playback, auto power off will not take effect.
- The display time may vary depending on the image.
- To view the slide show on a TV set, see page 351.

Viewing Images on a TV Set


By connecting the camera to a TV set with an HDMI cable (sold separately), you can play the camera's still photos and movies on the TV set. For the HDMI cable, HDMI Cable HTC-100 (sold separately) is recommended.

If the picture does not appear on the TV screen, set the [43: Video system] correctly to [For NTSC] or [For PAL] (depending on the video system of your TV set).



Connect the HDMI cable to the camera.


With the plug's < ▲ HDMI MINI> logo facing the front of the camera, insert it into the < HDMI OUT > terminal.



Connect the HDMI cable to the TV set.

 Connect the HDMI cable to the TV set's HDMI IN port.

Turn on the TV set and switch the TV set's video input to select the connected port.





Press the < >> button.

- The image will appear on the TV screen. (Nothing will be displayed on the camera's LCD monitor.)
- The images will automatically be displayed at the optimum resolution matching the connected TV set.
- By pressing the < INFO. > button, you can change the information display.
- To play back movies, see page 344.






- Adjust movie sound volume with the TV set. The sound volume cannot be adjusted with the camera.
- Before connecting or disconnecting the cable between the camera and TV set, turn off the camera and TV set.
- Depending on the TV set, part of the image displayed may be cut off.
- Do not connect any other device's output to the camera's <HDMI OUT > terminal. Doing so may cause a malfunction.
- Certain TV sets may not be able to display the captured movies.

Using HDMI CEC TV Sets

If the TV set connected to the camera with an HDMI cable is compatible with HDMI CEC*, you can use the TV set's remote control for playback operations.

* An HDMI-standard function enabling HDMI devices to control each other so that you can control them with one remote control unit.





Set [Ctrl over HDMI] to [Enable].

- Under the [▶3] tab, select [Ctrl over HDMI], then press < (st)>.
- Select [Enable], then press < (SET) >.

Connect the camera to a TV set.

- Use an HDMI cable to connect the camera to the TV set
- The TV set's input will switch automatically to the HDMI port connected to the camera. If it does not switch automatically, use the TV set's remote control to select the HDMI IN port the cable is connected to.

Press the camera's <►> button.

An image will appear on the TV screen and you can use the TV set's remote control to play back images.

Select an image.

 Point the remote control toward the TV set and press the ←/→ button to select an image.

Press the remote control's Enter button.

- The menu appears and you can perform the playback operations shown on the left.
- Press the remote control's ←/→ button to select the desired option, then press the Enter button. For a slide show, press the ↑/↓ button to select an option, then press the Enter button
- If you select [Return] and press the Enter button, the menu will disappear and you can use the ←/→ button to select an image.

Still photo playback menu



: 9-image index
: Play movie
: Slide show

INFO.: Display shooting info

: Rotate



During the two-image display (p.332), playback with the TV's remote control is not possible. To use the TV's remote control for playback, first press the < >> button to return to the single-image display.




- Some TV sets require you to first enable the HDMI CEC connection. For details, refer to the TV set's instruction manual.
- Certain TV sets, even those compatible with HDMI CEC, may not operate properly. In such a case, set [F3: Ctrl over HDMI] to [Disable], and use the camera to control the playback operation.

Copying Images

The images recorded on one card can be copied to another card.

MENU Copying a Single Image





Under the [1] tab, select [Image copy], then press < (set) >.



Select [Sel.Image].

- Check the copy source and target cards' number, and remaining capacity.
- Select [Sel.Image], then press < (st) >.

Lowest file number Number of images in folder



Select the folder.

- Select the folder containing the image you want to copy, then press < (ET) >.
- Check the images displayed on the right to select the desired folder.
- The images in the selected folder will be displayed.

The copy source is the card selected for [Record/play] or [Playback] under [1: Record func+card/folder sel.].

Total images selected



Select the images to be copied.

- Turn the <>> dial to select an image to be copied, then press <
- The [√] icon will appear on the upper left of the screen.
- If you press the <Q > button and turn the <॒> dial counterclockwise, you can select an image from a threeimage display. To return to the singleimage display, turn the <॒> dial clockwise.
- To select other images to be copied, repeat step 4.

Press the <RATE> button.

 After selecting all the images to be copied, press the <RATE> button.

Select [OK].


 Check the card where the images will be copied to, then select [OK].





Select the target folder.

- Select the target folder to which you want to copy the images, then press <(ET)>.
- To create a new folder, select [Create folder].



OK

Select [OK].

- Check the information of the source card and target card, then select [OK].
 - The copying will start and the progress will be displayed.
- When the copying is completed, the result will be displayed. Select [OK] to return to the screen in step 2.

MENU Copying All Images in a Folder or on a Card

You can copy all the images in a folder or on a card at once.



Under [▶1: Image copy], when you select [Sel. ▶ or [All image], you can copy all the images in the folder or on a card.



- The file name of the copied image will be the same as the source image's file name.
- If [Sel.Image] is set, you cannot copy images in multiple folders at once.
 Select images in each folder to copy them folder by folder.
- If an image is being copied to a target folder/card which has an image with the same file number, the following will be displayed: [Skip image and continue] [Replace existing image] [Cancel copy]. Select the copying method, then press <(ET)>.
 - [Skip image and continue]: Any images in the source folder having the same file number as images in the target folder will be skipped and not copied.
 - [Replace existing image]: Any images in the target folder having the same file number as the source images (including protected images) will be overwritten.

If an image with a print order (p.389) is overwritten, you will have to set the print order again.

- The image's print order information, image transfer information, and photo book order information will not be retained when the image is copied.
- Shooting is not possible during the copying operation. Select [Cancel] before shooting.

m Erasing Images

You can either select and erase unnecessary images one by one or erase them in one batch. Protected images (p.334) will not be erased.

Once an image is erased, it cannot be recovered. Make sure you no longer need the image before erasing it. To prevent important images from being erased accidentally, protect them. Erasing a RAW+JPEG image will erase both the RAW and JPEG images.

Erasing a Single Image



Play back the image to be erased.

Press the < m > button.

The Erase menu will appear.



Erase the image.


Select [Erase], then press < (SET) >. The image displayed will be erased.




Setting [....3: Default Erase option] to [[Erase] selected] makes it faster to erase images (p.412).

MENU Checkmarking [√] Images to Be Erased in a Batch

By appending checkmarks < \checkmark > to the images to be erased, you can erase multiple images at once.









Select [Erase images].

• Under the [►1] tab, select [Erase images], then press <(€ET)>.

Select [Select and erase images].

- An image will be displayed.
- If you press the <Q > button and turn the <a>> dial counterclockwise, you can select an image from a three-image display. To return to the single-image display, turn the <a>> dial clockwise

Select the images to be erased.

- Turn the < > dial to select the image to be erased, then press < (FT) >.
- A checkmark [√] will be displayed on the upper left of the screen.
- To select other images to be erased, repeat step 3.

Erase the image.

- Press the < m̄ > button, then press [**OK**].
- The selected images will be erased in one batch.

MENU Erasing All Images in a Folder or on a Card

You can erase all the images in a folder or on a card at once. When [1: Erase images] is set to [All images in folder] or [All images on card], all the images in the folder or on the card will be erased.



- To erase all images, including protected images, format the card (p.67).
 - The images on the card selected for [Record/play] or [Playback] under [\forall 1: Record func+card/folder sel.] will be erased.

Changing Image Playback Settings

MENU Adjusting the LCD Monitor Brightness

The LCD monitor's brightness is adjusted automatically for optimum viewing depending on the ambient light level. You can also set the automatic adjustment's brightness level (brighter or darker), or adjust the brightness manually.



Select [LCD brightness].

Under the [2] tab, select [LCD brightness], then press < (FT) >.

Select [Auto] or [Manual].

Turn the < > dial to make the selection.


Adjust the brightness.

- While referring to the gray chart, turn the <0> dial, then press < 1>.
- You can adjust [Auto] to one of three levels, and [Manual] to one of seven levels.

Automatic adjustment



Manual adjustment





While [Auto] is set, be careful not to obstruct the round, ambient light sensor (p.28) under the LCD monitor with your finger, etc.



- To check the image's exposure, looking at the histogram is recommended (p.326).
- During playback, pressing the < 0; > button will display the screen in step 2.

MENU Auto Rotation of Vertical Images



Vertical images are rotated automatically so they are displayed vertically on the camera's LCD monitor and on the computer instead of horizontally. You can change the setting for this feature



Select [Auto rotate].

Under the [¥1] tab, select [Auto rotate], then press <(⊊F)>.

Set the auto rotation.

- Select the desired setting, then press < (FT)>.
- On
 ☐ ☐

 The vertical image is automatically rotated during playback on both the camera's LCD monitor and on the computer.
- On
 The vertical image is automatically rotated only on the computer.
- Off
 The vertical image is not automatically rotated.



Auto rotation will not work with vertical images captured while auto rotation was [Off]. They will not rotate even if you later switch it to [On] for playback.



- The vertical image will not be automatically rotated for the image review just after shooting.
- If the vertical image is taken while the camera is pointed up or down, the image may not be rotated automatically for playback.
- If the vertical image is not automatically rotated on the computer screen, it means the software you are using is unable to rotate the image. Using the EOS software is recommended.

Post-Processing Images

You can process RAW images and resize or crop JPEG images.

 A ☆ icon at the upper right of a page title indicates a function that can be used only in the following modes: <P> <Τv><Δv><Μ><Β>




- The camera may not be able to process images taken with another camera
 - Post-processing images as described in this chapter cannot be performed while the camera is connected to a computer via an interface cable

RAW Images with the Camera *

You can process (AM) images with the camera and save them as JPEG images. As the RAW image itself does not change, you can apply different processing conditions to create any number of JPEG images from it.

Note that **M** (AW) and **S** (AW) images cannot be processed with the camera. Use Digital Photo Professional (EOS software, p.520) to process those images.







Select [RAW image processing].

- Under the [▶1] tab, select [RAW image processing], then press
 ⟨€)>.
- RAW images will be displayed.

Select an image.

- Turn the < > dial to select the image you want to process.
- If you press the <Q> button and turn the <\(\subseteq\)> dial counterclockwise, you can select an image from the index display.

Process the image.

- Press < (\$\sir*) > to make the RAWprocessing options appear (p.366).
- Use <∜> to select an option, then turn the <∅> dial to switch the setting.
- The displayed image will reflect such settings as "Brightness adjustment", "White balance", etc.
- To return to the image settings at the time of shooting, press the <INFO.> button.








Displaying the setting screen

Press <€> to display the setting screen. Turn the <○ > or <△ > dial to change the setting. Press <€> to finalize the setting and return to the previous screen.



- Select [1] (Save), then press < (SET) >.
- Select [OK] to save the image.
- Check the destination folder and image file number, then select [OK].
- To process another image, repeat steps 2 to 4.

Magnified View

You can magnify the image by pressing the <Q> button in step 3. The magnification will differ depending on the pixel count of [Image quality] set in [RAW image processing]. With < \Leftrightarrow >, you can scroll around the magnified image.

To cancel magnified view, press the <Q > button again.

Crop/Aspect Ratio

Frame lines indicating the shooting area will be displayed on images shot when [12 4: Crop/aspect ratio] (p.154) is set to an option other than [Full-frame]. JPEG images generated from RAW images will be saved with the cropping area or aspect ratio that was set.

RAW Image Processing Options

- *±0 Brightness adjustment
 You can adjust the image brightness up to ±1 stop in 1/3-stop increments. The displayed image will reflect the setting's effect.
- ™ White balance (p.174)
 You can select the white balance. If you select [₩] and press the <INFO.> button, you can select [Auto: Ambience priority] or [Auto: White priority]. If you select [【] and press the <INFO.> button, you can set the color temperature. The displayed image will reflect the setting's effect.
- Picture Style (p.164) You can select the Picture Style. By pressing the <INFO.> button, you can adjust the sharpness and other parameters. The displayed image will reflect the setting's effect.
- Auto Lighting Optimizer (p.182) You can set the Auto Lighting Optimizer. The displayed image will reflect the setting's effect.
- NR_{ii} High ISO speed noise reduction (p.183) You can set the noise reduction for high ISO speeds. The displayed image will reflect the setting's effect. If the effect is difficult to discern, magnify the image (p.365).
- Image quality (p.149)
 You can set the image quality when generating an image in JPEG format.

- sRGB Color space (p.193)
 - You can select either sRGB or Adobe RGB. Since the camera's LCD monitor is not compatible with Adobe RGB, the image will not look very different when either color space is set.
- Peripheral illumination correction (p.188) If [Enable] is set, the corrected image will be displayed. If the effect is difficult to discern, magnify the image (p.365) and check the four corners. The peripheral illumination correction applied with the camera will be less pronounced than with Digital Photo Professional (EOS software) and may be less apparent. In such a case, use Digital Photo Professional to apply the peripheral illumination correction.
- Distortion correction Image distortion due to lens characteristics can be corrected. If [Enable] is set, the corrected image will be displayed. The image periphery will be trimmed in the corrected image. Since the image resolution may look slightly lower, adjust the
 - Since the image resolution may look slightly lower, adjust the sharpness with the Picture Style's [**Sharpness**] parameter setting as necessary.
- Worr Chromatic aberration correction (p.189)
 Chromatic aberrations (color fringing along the subject's outline) due to the lens characteristics can be corrected. If [Enable] is set, the corrected image will be displayed. If the effect is difficult to discern, magnify the image (p.365).



Peripheral Illumination Correction, Distortion Correction, and Chromatic Aberration Correction

To execute peripheral illumination correction, distortion correction, and chromatic aberration correction, the correction data of the lens used is necessary. If you cannot apply correction when processing RAW images in the camera, use EOS Utility (EOS software, p.520) to register the correction data to the camera.



- Processing RAW images in the camera will not produce the same results as processing RAW images with Digital Photo Professional.
 - When processing images with [Distortion] set to [Enable], AF point display information (p.325) and Dust Delete Data (p.375) will not be appended to the image.

☐ Resizing JPEG Images

You can resize a JPEG image to make the pixel count lower and save it as a new image. Resizing an image is possible only with JPEG L/M1/M2/S1/S2 images. JPEG S3 and RAW images cannot be resized.







Target sizes



Select [Resize].

- Under the [▶2] tab, select [Resize], then press <(€)>.
- An image will be displayed.

Select an image.

- Turn the < >> dial to select the image you want to resize.
- If you press the <Q > button and turn the <a>> dial counterclockwise, you can select an image from the index display.

Select the desired image size.

- Press < (ET) > to display the image sizes
- Select the desired image size, then press < (ET)>.

Save the image.

- Select [OK] to save the resized image.
- Check the destination folder and image file number, then select [OK].
- To resize another image, repeat steps 2 to 4.

Resize Options by Original Image Size

Original Image Size	Available Resize Settings				
Original illage Size	M1	M2	S1	S2	S 3
L	0	0	0	0	0
M1		0	0	0	0
M2			0	0	0
S1				0	0
S2					0

Image Sizes

Sizes for resized images are shown below.

(Approx.)

Image Quality	Full-frame (3:2)	1.3x (crop)	1.6x (crop)	
M1	7680x5120	6016x4000*	4800x3200	
	(39.3 megapixels)	(24.1 megapixels)	(15.4 megapixels)	
M2	5760x3840	4512x3008	3616x2408*	
	(22.1 megapixels)	(13.6 megapixels)	(8.7 megapixels)	
S1	4320x2880	3376x2256*	2704x1808*	
	(12.4 megapixels)	(7.6 megapixels)	(4.9 megapixels)	
S2	1920x1280	1920x1280	1920x1280	
	(2.5 megapixels)	(2.5 megapixels)	(2.5 megapixels)	
\$3	720x480	720x480	720x480	
	(350,000 pixels)	(350,000 pixels)	(350,000 pixels)	

Image Quality	1:1 (aspect ratio)	4:3 (aspect ratio)	16:9 (aspect ratio)
M1	5120x5120	6816x5120*	7680x4320
	(26.2 megapixels)	(34.9 megapixels)	(33.2 megapixels)
M2	3840x3840	5120x3840	5760x3240
	(14.7 megapixels)	(19.7 megapixels)	(18.7 megapixels)
S1	2880x2880	3840x2880	4320x2432*
	(8.3 megapixels)	(11.1 megapixels)	(10.5 megapixels)
\$2	1280x1280	1712x1280*	1920x1080
	(1.6 megapixels)	(2.2 megapixels)	(2.1 megapixels)
\$3	480x480	640x480	720x408*
	(230,000 pixels)	(310,000 pixels)	(290,000 pixels)

lacksquare The items marked with an asterisk do not exactly match the indicated aspect ratio. The image will be cropped slightly.

☐ Cropping JPEG Images

You can crop a JPEG image and save it as another image. You can crop L, M1, M2, S1 and S2 JPEG images. JPEG S3 and RAW images cannot be cropped.





- Under the [▶2] tab, select [Cropping], then press <(ET)>.
- An image is displayed.



Select an image.

- Turn the <>> dial to select the image you want to crop.
- If you press the <Q > button and turn the < > dial counterclockwise, you can select an image from the index display.



Set the cropping frame size, aspect ratio, position, and orientation.

- Press < (str) > to display the cropping frame
- The image area within the cropping frame will be cropped.

Changing the Cropping Frame Size

Turn the < > dial to change the cropping frame size. The smaller the cropping frame, the more magnified the cropped image will look.

Changing the Aspect Ratio

Turn the <>> dial to change the cropping frame's aspect ratio. You can select the aspect ratio as follows: [3:2], [16:9], [4:3], or [1:1].


Moving the Cropping Frame

Use < to move the frame over the image vertically or horizontally. Move the cropping frame until it covers the desired image area.

Switching the Cropping Frame Orientation

Pressing the <**INFO.**> button will toggle the cropping frame between the vertical and horizontal orientations. This enables you to create a vertically oriented image from a horizontal image.





- Press the <Q> button.
- The image area to be cropped will be displayed.
- Press the <Q> button again to return to the original image.



- Press < (st) > and select [OK] to save the cropped image.
- Check the destination folder and image number, then select [OK].
- To crop another image, repeat steps 2 to 4.





- Once a cropped image is saved, it cannot be cropped again or resized.
- AF point display information (p.325) and Dust Delete Data (p.375) will not be appended to the cropped images.

Sensor Cleaning

The camera has a Self Cleaning Sensor Unit to automatically shake off dust adhered to the image sensor's front layer (low pass filter).

The Dust Delete Data can also be appended to the image so that the dust spots remaining can be deleted automatically by Digital Photo Professional (EOS software, p.520).

Smudges adhering to the front of the sensor

Besides dust entering the camera from outside, in rare cases, lubricant from the camera's internal parts may adhere to the front of the sensor. If visible spots still remain after the automatic sensor cleaning, having the sensor cleaned by a Canon Service Center is recommended.



Even while the Self Cleaning Sensor Unit is operating, you can press the shutter button halfway to interrupt the cleaning and start shooting immediately.

. to Automatic Sensor Cleaning

Whenever you set the power switch to **ON** or **OFF**, the Self Cleaning Sensor Unit operates to automatically shake off the dust on the front of the sensor. Normally, you need not pay attention to this operation. However, you can choose to perform sensor cleaning manually, or disable it.

Cleaning the Sensor Now





Under the [¥3] tab, select [Sensor cleaning], then press <(€).



) Select [Clean now ౘ급].

- Select [OK].
- The screen will indicate that the sensor is being cleaned. (A small sound may be heard.) Although there will be a shutter sound, no picture is taken.



- For best results, perform the sensor cleaning with the camera placed upright and stable on a table or other flat surface.
- Even if you repeat the sensor cleaning, the result will not improve much.
 Immediately after the sensor cleaning is finished, the [Clean now the properties of the prop

Disabling Automatic Sensor Cleaning

- In step 2, select [Auto cleaning :] and set it to [Disable].
- The sensor cleaning will no longer be executed when you set the power switch to <ON> or <OFF>.


MENU Appending Dust Delete Data ★

Normally, the Self Cleaning Sensor Unit will eliminate most of the dust that may be visible on captured images. However, in case visible dust still remains, you can append the Dust Delete Data to the image for erasing the dust spots later. The Dust Delete Data is used by Digital Photo Professional (EOS software, p.520) to erase the dust spots automatically.

Preparation

- Prepare a solid white object such as a sheet of paper.
- Set the lens focal length to 50 mm or longer.
- Set the lens's focus mode switch to <MF> and set the focus to infinity (∞). If the lens has no distance scale, rotate the camera to face towards you and turn the focusing ring clockwise all the way.

Obtaining the Dust Delete Data








Select [OK].

After the automatic self-cleaning of the sensor is performed, a message will appear. Although there will be a shutter sound during the cleaning, no picture is taken.









Shoot a solid-white object.

- At a distance of 20 cm 30 cm (0.7 ft. 1.0 ft.), fill the viewfinder with a patternless, solid-white object and take a picture.
- ➤ The picture will be taken in aperturepriority AE mode at an aperture of f/22.
- Since the image will not be saved, the data can still be obtained even if there is no card in the camera.
- When the picture is taken, the camera will start collecting the Dust Delete Data. When the Dust Delete Data is obtained, a message will appear.
- If the data is not obtained successfully, an error message will appear. Follow the "Preparation" procedure on the preceding page, then select [OK]. Take the picture again.

Dust Delete Data

After the Dust Delete Data is obtained, it is appended to all the JPEG and RAW images captured thereafter. Before an important shoot, it is recommended that you update the Dust Delete Data by obtaining it again.

For details about using Digital Photo Professional (EOS software, p.520) to erase dust spots, refer to the Digital Photo Professional Instruction Manual (p.522).

The Dust Delete Data appended to the image is so small that it hardly affects the image file size.



Be sure to use a solid-white object such as a new sheet of white paper. If the object has any pattern or design, it may be recognized as dust data and affect the accuracy of the dust deletion with the EOS software.

MENU Manual Sensor Cleaning *

Dust that could not be removed by the automatic sensor cleaning can be removed manually with a commercially-available blower, etc. Before cleaning the sensor, detach the lens from the camera.

The image sensor is extremely delicate. If the sensor needs to be cleaned directly, having it done by a Canon Service Center is recommended.



Select [Sensor cleaning].

Under the [43] tab. select [Sensor cleaning], then press < (ET) >.



Select [Clean manually].



Select [OK].

- In a moment, the reflex mirror will lock up and the shutter will open.
- "CLn" will blink on the LCD panel.
- Clean the sensor.
- End the cleaning.
 - Set the power switch to **OFF**>.



- If you use a battery, make sure it is fully charged.
- If you use Battery Grip BG-E11 (sold separately) with AA/R6 batteries. manual sensor cleaning will not be possible.

For the power source, using AC Adapter Kit ACK-E6 (sold separately) is recommended.



- While cleaning the sensor, never do any of the following. If the power is cut off, the shutter will close and the shutter curtains and image sensor may get damaged.
 - Setting the power switch to <OFF>.
 - · Removing or inserting the battery.
- The surface of the image sensor is extremely delicate. Clean the sensor with care.
- Use a plain blower without any brush attached. A brush can scratch the sensor
- Do not insert the blower tip inside the camera beyond the lens mount. If the power is turned off, the shutter will close and the shutter curtains or reflex mirror may get damaged.
- Never use pressurized air or gas to clean the sensor. The blowing force can damage the sensor, or the spray gas can freeze on the sensor and scratch it.
- If the battery level becomes low while you clean the sensor, the beeper will sound as a warning. Stop cleaning the sensor.
- If a smudge that cannot be removed with a blower remains, having the sensor cleaned by a Canon Service Center is recommended.

12

Printing Images and Transferring Images to a Computer


- Printing (p.382)
 You can connect the camera directly to a printer and print out the images on the card. The camera is compliant with "A PictBridge", which is the standard for direct printing.
- Digital Print Order Format (DPOF) (p.389) DPOF (Digital Print Order Format) enables you to print images recorded on the card according to your printing instructions such as the image selection, quantity to print, etc. You can print multiple images in one batch or create a print order for a photofinisher.
- Transferring Images to a Computer (p.393)
 You can connect the camera to a computer and operate the camera to transfer images recorded on the card to the computer.
- Specifying Images for a Photobook (p.397)
 You can specify images on the card for printing in a photobook.


Preparing to Print

The direct printing procedure can be performed entirely with the camera while you look at the camera's LCD monitor.


Connecting the Camera to a Printer








For details, refer to the printer's instruction manual.



Connect the camera to a printer.

- Use the interface cable provided with the camera.
- When connecting the cable to the camera, use the cable protector (p.36). Connect the cable to the digital terminal with the plug's <ss: icon facing the back of the camera.
- To connect to the printer, refer to the printer's instruction manual.




Turn on the printer.



- Set the camera's power switch to <ON>.
 - Some printers may make a beeping sound.





- Press the < ►> button.
- ► The image will appear with the icon on the upper left of the screen to indicate that the camera is connected to a printer.



- Make sure the printer has a PictBridge connection port.
 - Use the provided interface cable or one from Canon (p.454). When connecting the interface cable, use the provided cable protector (p.36).
 - Movies cannot be printed.
 - The camera cannot be used with printers conforming only to CP Direct or Bubble Jet Direct.
 - If there is a long beeping sound in step 5, it indicates a problem with the printer. Resolve the problem displayed in the error message (p.388).
 - Printing is not possible if Multi Shot Noise Reduction or the HDR Mode is set



- You can also print RAW images taken with this camera.
- You can also print JPEG/RAW images shot when [☐ 4: Crop/aspect ratio1 (p.154) is set.
- If you use a battery to power the camera, make sure it is fully charged. With a fully-charged battery, printing up to approx. 3 hr. is possible.
- Before disconnecting the cable, first turn off the camera and printer. Hold the plug (not the cord) to pull out the cable.
- For direct printing, using AC Adapter Kit ACK-E6 (sold separately) to power the camera is recommended.




The screen display and setting options will differ depending on the printer. Some settings may not be available. For details, refer to the printer's instruction manual.

Printer-connected icon



Select the image to be printed.

- Check that the
 icon is displayed on the upper left of the LCD monitor.
- Turn the < >> dial to select the image to be printed.
- - The print setting screen will appear.



The paper size, type, and layout you set are displayed.

* Depending on the printer, certain settings such as the date and file number imprinting and cropping may not be selectable.



Select [Paper settings].


The paper settings screen will appear.

□ Setting the Paper Size



- Select the size of the paper loaded in the printer, then press < (ET)>.
- The paper type screen will appear.

Setting the Paper Type



- Select the type of the paper loaded in the printer, then press < (\$\varepsilon \varepsilon) >.
- The page layout screen will appear.

Setting the Page Layout



- Select the page layout, then press <(SET)>.
- The print setting screen will reappear.

Borderless	Prints with no borders. If your printer cannot print borderless prints, the print will have borders.
Bordered	Prints with white borders along the edges.
Bordered [1	Imprints the shooting information* ¹ on the border on 9x13 cm or larger prints.
xx-up	Option to print 2, 4, 8, 9, 16, or 20 images on one sheet.
20-up ∏ 35-up□	Prints 20 or 35 images as thumbnails on A4 or Letter size paper* ² . Imprints the shooting information* ¹ with [20-up Ⅱ].
Default	The page layout varies depending on the printer model or its settings.

^{*1:} From the Exif data, the camera name, lens name, shooting mode, shutter speed, aperture, exposure compensation amount, ISO speed, white balance, etc., will be imprinted.

^{*2:}After ordering the prints with "Digital Print Order Format (DPOF)" (p.389), printing by following "Direct Printing of Print-Ordered Images" (p.392) is recommended.





Set the printing effects.

- Set them if necessary. If you do not need to set any printing effects, go to step 5.
- Contents displayed on the screen differ depending on the printer.
- Select the setting, then press <(st)>.
- Select the desired printing effect, then press < (SET) >.
- brightly, you can also adjust the printing effects (p.386).

Printing Effect	Description		
⊘ Off	No automatic correction is applied.		
⊘ On	Print with the printer's standard colors. The image's Exif data is used to make automatic corrections.		
™VIVID	Print with higher saturation to produce more vivid blues and greens.		
⊠NR	Image noise is reduced before printing.		
B/W B/W	Prints in black-and-white with true blacks.		
B/W Cool tone	Prints in black-and-white with cool, bluish blacks.		
B/W Warm tone	Prints in black-and-white with warm, yellowish blacks.		
△ Natural	Prints the image in the actual colors and contrast. No automatic color adjustments are applied.		
▲ Natural M	Printing characteristics are the same as the "Natural" setting. However, this setting enables finer printing adjustments than with "Natural."		
○ Default	Printing differs depending on the printer. For details, refer to the printer's instruction manual.		

When you change the printing effects, changes are reflected in the image displayed on the upper left of the screen. Note that the printed image may look slightly different from the displayed image, which is only an approximation. This also applies to [Brightness] and [Adjust levels] on page 386.







Set the date and file number imprinting.

- Set them if necessary.
- Set the print settings as desired, then press < (ET)>.

Set the number of copies.

- Set it if necessary.
- Select <□>, then press <☞>.
- Select the number of copies, then press < (ET) >.

Start printing.

Select [Print], then press < (SET) >.



- The [Default] setting for printing effects and other options are the printer's own default settings as set by the printer's manufacturer. Refer to the printer's instruction manual to find out what the [Default] settings are
- Depending on the image's file size and image-recording quality, it may take some time for the printing to start after you select [Print].
- If image tilt correction (p.387) is applied, it may take longer to print the image.
- To stop the printing, press <(ET)> while [Stop] is displayed, then select [OK].
- If you execute [\$\psi 4\$: Clear all camera settings] (p.70), all the settings will revert to their defaults.



Adjusting Printing Effects



PrintEffect	■Natural M		
Brightness	= 0 a		
Adjust levels	Off		
# Brightener	Off		
Red-eye corr	Off		

In step 4 on page 384, select the printing effect. When the < INFO => icons are displayed brightly, you can press the < INFO. > button. You can then adjust the printing effects. What can be adjusted or what is displayed will depend on the selection made in step 4.

Brightness

The image brightness can be adjusted.

Adjust levels

When you select [Manual], you can change the histogram's distribution and adjust the image's brightness and contrast.

With the Adjust levels screen displayed, press the <**INFO.** > button to change the position of the <1>. Turn the <0> dial to freely adjust

the shadow level (0 - 127) or highlight level (128 - 255).

Brightener

Effective in backlit conditions where the subject's face looks dark. When [On] is set, the face will be brightened for printing.

Red-eve corr.

Effective in flash images where the subject has red eyes. When [On] is set, the red eye will be corrected for printing.



- The [Brightener] and [Red-eye corr.] effects will not be reflected on the screen.
- When [Detail set.] is selected, you can adjust the [Contrast], [Saturation], [Color tone], and [Color balance]. To adjust the [Color **balance**], use < ...>. B is for blue. A for amber, M for magenta, and G for green. The image's color balance will be adjusted towards the color in the direction of the move.
- If you select [Clear all], all the printing effect settings will be reverted to their defaults.



Cropping the Image

Tilt correction



You can crop the image and print only an enlarged version of the cropped portion, as if the image is recomposed.

Set the cropping right before printing. If you change the print settings after setting the cropping, you may have to set the cropping again before printing.

- On the print setting screen, select [Cropping].
- Set the cropping frame size, position, and aspect ratio.
 - The image area within the cropping frame will be printed. The cropping frame's aspect ratio can be changed with [Paper settings].

Changing the Cropping Frame Size

Turn the < > dial to change the cropping frame size. The smaller the cropping frame, the larger the image magnification will be for printing.

Moving the Cropping Frame

Use < >> to move the frame over the image vertically or horizontally. Move the cropping frame until it covers the desired image area.

Switching the Orientations of the Cropping Frame

Pressing the <**INFO.**> button will toggle the cropping frame between the vertical and horizontal orientations. This enables you to create a vertically oriented print from a horizontal image.

Image Tilt Correction

By turning the <>> dial, you can tilt the image between -10 and +10 degrees in 0.5-degree increments. When you adjust the

- Press <<</p>
 From > to exit the cropping.
 - The print setting screen will reappear.
 - You can check the cropped image area on the print setting screen.



- Depending on the printer, you may not be able to print an image with a large image size. In such a case, resize the image (p.369), then print.
- If the image's aspect ratio is different from the printing paper's aspect ratio, the image may be cropped significantly when you print it as a borderless print. If the image is cropped, the print may look grainier due to the fewer number of pixels.
- If you imprint shooting information on an image shot at an expanded ISO speed (H), the correct ISO speed may not be imprinted.
- Depending on the printer, the cropped image area may not be printed as vou specified.
- The smaller you make the cropping frame, the grainier the picture will look in the print.
- Check the camera's LCD monitor while cropping the image. If you look at the image on a TV screen, the cropping frame may not be displayed accurately.



Handling Printer Errors

If printing does not resume after you resolve a printer error (no ink, no paper. etc.) and select [Continue], operate the buttons on the printer to resume printing. For details on resuming the printing, refer to the printer's instruction manual

Error Messages

If a problem occurs during printing, an error message will appear on the camera's LCD monitor. Press < (\$ET) > to stop printing. After fixing the problem, resume printing. For details on how to fix a printing problem, refer to the printer's instruction manual.

Paper Error

Check whether the paper is properly loaded in the printer.

Ink Error

Check the printer's ink level and the waste ink tank.

Hardware Error

Check for any printer problems other than paper and ink problems.


File Error

The selected image cannot be printed via PictBridge. Images taken with a different camera or images edited with a computer may not be printable.

Digital Print Order Format (DPOF)

You can set the print settings such as print type, date imprinting, file number imprinting, etc. The print settings will be applied to all print-ordered images. (They cannot be set individually for each image.)

Setting the Printing Options





Under the [►1] tab, select [Print order], then press <(□)>.



Select [Set up].

Set the options as desired.

- Set the [Print type], [Date], and [File No.].
- Select the option to be set, then press <(st)>. Select the desired setting, then press <(st)>.



Print type



Set up

File No. On

Date

File No.

		Standard		Prints one image on one sheet.	
Print type	働	Index		Multiple thumbnail images are printed on one sheet.	
		Both		Prints both the standard and index prints.	
Date	C	On [On] imprints the recorded date on the		rints the recorded date on the print.	
Date	C	Off	[OII] IIIIP	initis the recorded date on the print.	
File number	C)n	[On] imprints the file number on the print.		
i lie nambei	C	Off	[Cii] iiiip	Tints the life number on the print.	



Exit the setting.

- Press the <MFNIJ> button.
- The print order screen will reappear.
- Next, select [Sel.Image], [By] or [All image] to order the images to be printed.



- RAW images and movies cannot be print ordered. You can print RAW images with PictBridge (p.379).
- If you print an image with a large image size using the [Index] or [Both] setting (p.392), the index print may not be printed with some printers. In such a case, resize the image (p.369), then print the index print.
- Even if [Date] and [File No.] are set to [On], the date or file number may not be imprinted, depending on the print type setting and printer model.
- With [Index] prints, the [Date] and [File No.] cannot both be set to [On]
 at the same time.
- When printing with DPOF, use the card whose print order specifications are set. It cannot be printed with the specified print order if you just extract images from the card and try to print them.
- Certain DPOF-compatible printers and photofinishers may not be able to print the images as you specified. Refer to the printer's instruction manual before printing, or check with your photofinisher about compatibility when ordering prints.
- Do not specify a new print order for a card containing images whose print order was set by a different camera. The print order may be overwritten.
 Also, the print order may not be possible, depending on the image type.

Print Ordering

Sel.Image







Select and order images one by one. If you press the <Q > button and turn the select an image from a three-image display. To return to the single-image display, turn the < > dial clockwise. Press the <MFNU> button to save the print order to the card.

Standard / Both

Press < (SET) >, and a print order for one copy of the displayed image will be placed. By turning the <>> dial, you can set the number of copies to be printed up to 99.

Index

Press < (st) > to add a checkmark to the box [√]. The image will be included in the index print.

By 🖿

Select [Mark all in folder] and select the folder. A print order for one copy of all the images in the folder will be specified. If you select [Clear all in folder] and select the folder, the print order for all the images in the folder will be canceled.

All image

If you select [Mark all on card], one copy of all the images on the card will be set for printing. If you select [Clear all on card], the print order will be cleared for all the images on the card.



- Note that RAW images and movies will not be included in the print order even if you set [By] or [All image].
 - When using a PictBridge printer, print no more than 400 images for one print order. If you specify more than this, all the images may not be printed.

Direct Printing of Print-Ordered Images



With a PictBridge printer, you can easily print images with DPOF.

1 Prepare to print.

- See page 380.
 Follow the "Connecting the Camera to a Printer" procedure up to step 5.
- Under the [►1] tab, select [Print order].
- 3 Select [Print].
 - [Print] will be displayed only if the camera is connected to a printer and printing is possible.
- 4 Set the [Paper settings] (p.382).
 - Set the printing effects (p.384) if necessary.
- Select [OK].



- Before printing, be sure to set the paper size.
- Certain printers may not imprint the file number.
- If [Bordered] is set, certain printers may imprint the date on the border.
- Depending on the printer, the date may appear faint if it is imprinted on a bright background or on the border.
- Under [Adjust levels], [Manual] cannot be selected.



- If you stopped the printing and want to resume printing of the remaining images, select [Resume]. Note that printing will not resume if any of the following are the case:
 - You changed the print order or deleted any of the print ordered images before resuming the printing.
 - When index is set, you changed the paper setting before resuming the printing.
 - $\bullet\,$ The card's remaining capacity was low when you paused the printing.
- If a problem occurs during printing, see page 388.

Transferring Images to a Computer

You can connect the camera to a computer and operate the camera to transfer images on the card to the computer. This is called direct image transfer

The direct image transfer can be performed with the camera while you look at the LCD monitor.

The images transferred to the computer will be saved in the [Pictures] or [My Pictures] folder and organized in folders by shooting date.





Caution for Image Transfer

Before connecting the camera to a computer, install the EOS Utility (p.521) on your computer.

computer.

Preparing Image Transfer





- Set the camera's power switch to <OFF>.
- Connect the camera to a
 - Use the interface cable provided with the camera
 - When connecting the cable to the camera, use the cable protector (p.36). Connect the cable to the digital terminal with the plug's camera
 - Connect the cord's plug to the computer's USB terminal.




Use the provided interface cable or one from Canon (p.454). When connecting the interface cable, use the provided cable protector (p.36).





Set the camera's power switch to <ON>.

- When the computer displays a screen to select the program, select [EOS Utility].
- The EOS Utility screen will appear on the computer.





- If the EOS Utility screen does not appear, refer to the EOS Utility Instruction Manual (p.522).
- Before disconnecting the cable, turn off the camera. Hold the plug (not the cord) to pull out the cable.

MENU Transferring RAW+JPEG Images



For RAW+JPEG images, you can specify which image to transfer.

On the next page in step 2, select [RAW+JPEG transfer], and select the image to be transferred: [JPEG only], [RAW only], or [RAW+JPEG].

MENU Selecting the Images to be Transferred

Sel.Image









Select [Image transfer].

Under the [▶2] tab, select [Image transfer], then press <(€1)>.

Select [Image sel./transfer].

Select [Sel.Image].

Select the images to be transferred

- Turn the < > dial to select the image to be transferred, then press < >
- Turn the <
 > dial to display the [√] on the screen's upper left, then press <
- If you press the <Q > button and turn the <△⇒ > dial counterclockwise, you can select an image from a three-image display. To return to the single-image display, turn the <△⇒ > dial clockwise.
- To select other images to be transferred, repeat step 4.



- When [Sel.Image] is selected, you can check the image's transfer status on the upper left of the screen: No mark: Not selected. ✓: Selected for transfer. X: Transfer failed. O: Transfer succeeded.
- The procedures for [RAW+JPEG transfer] (p.394) and above steps 1 to 4 can also be performed while the camera is not connected to a computer.





Transfer the image.

- On the computer screen, check that EOS Utility's main window is displayed.
- Select [Direct transfer], then press <(ET)>.
- On the confirmation dialog, select [OK], and the images will be transferred to the computer.
- Images selected with [Sel. 1] and [All image] can also be transferred in this way.

Sel.

Select [Sel. 1] and select [Folder images not transfer'd]. When you select a folder, all the images in that folder not yet transferred to the computer will be selected.

Selecting [Folder images failed transf.] will select the selected folder's images that failed to transfer.

Selecting [Clear folder transf. history] will clear the transfer history of the images in the selected folder. After clearing the transfer history, you can select [Folder images not transfer'd] and again transfer all the images in the folder.

All image

If [All image] is selected and you select [Card images not transferred], all the images on the card not yet transferred to a computer will be selected.

For a description of [Card images failed transfer] and [Clear card's transf. history], see "Sel.

" above.



- If any screen other than EOS Utility's main window is displayed on the computer, [Direct transfer] is not displayed.
- During the image transfer, certain menu options cannot be used.




- You can also transfer movies.
- Up to 9,999 images can be transferred in one batch.
- Shooting is possible during the image transfer.

Specifying Images for a Photobook

You can specify up to 998 images to be printed in a photobook. When you use EOS Utility (EOS software) to transfer images to a computer, the specified images will be copied to a dedicated folder. This function is useful for ordering photobooks online.

Specifying One Image at a Time



Select [Photobook Set-up].

 Under the [▶1] tab, select [Photobook set-up], then press <(□)>.



Select [Select images].



Select the image to be specified.

- Turn the <>> dial to select the image to be specified, then press <
- If you press the <Q > button and turn the < >> dial counterclockwise, you can select an image from a threeimage display. To return to the singleimage display, turn the < >> dial clockwise.
- To select other images to be transferred, repeat step 3. The number of specified images will be displayed.

Specifying All Images in a Folder or on a Card

You can specify all the images in a folder or on a card at once.



When [▶1: Photobook Set-up] is set to [All images in folder] or [All images on card], all the images in the folder or on the card will be specified.

To clear your selections, select [Clear all in folder] or [Clear all on card].



- RAW images and movies cannot be specified.
 - Do not specify images already specified for a photobook in another camera for another photobook with this camera. The photobook settings may be overwritten.

13

Customizing the Camera

You can customize various camera functions to suit your picture-taking preferences with Custom Functions. Also, current camera settings can be saved under < >> < >> > positions of the Mode Dial.

The features explained in this chapter can be set and used in the following shooting modes: $<\mathbf{P}><\mathbf{Tv}>$ $<\mathbf{Av}><\mathbf{M}><\mathbf{B}>$.



MENU Custom Functions ★

.Ω.1: Exposure		Shooting	Shooting
Exposure level increments	p.402	0	0
ISO speed setting increments	p.402	0	In M
Bracketing auto cancel	p.403	0	(Still photo,
Bracketing sequence	p. -1 05	0	with WB
Number of bracketed shots	p.404	0	bracketing)
Safety shift	p.405	0	
Same exposure for new aperture	p.406	0	

2: Exposure

Set shutter speed range	p.408	0	0
Set aperture range	р.400	0	0

₼ IV

> Movie

Ď	13	•	Ot	he	re

		Shooting	Shooting
Warnings () in viewfinder	p.409		
Dial direction during Tv/Av	p.410	0	0
Multi function lock	p.+10	0	0
Custom Controls	p.411	Depends	on setting
Add cropping information	p.+11	0	
Default Erase option	p.412	(During playback)	
Retract lens on power off	p. 112	0	0

.0.4: Clear

Selecting [. . 4: Clear all Custom Func. (C.Fn)] will clear all the Custom Function settings.

MENU Custom Function Settings [★]



Under the [...] tab, you can customize various camera features to suit your picture-taking preferences. Any settings different from the default will be displayed in blue.

C.Fn1: Exposure

Exposure level increments

1/3:1/3-stop

1/2:1/2-stop

Sets 1/2-stop increments for the shutter speed, aperture, exposure compensation, AEB, flash exposure compensation, etc. This is effective when you prefer to control the exposure in less fine increments than 1/3-stop.



When [1/2-stop] is set, the exposure level will be displayed as shown below.





ISO speed setting increments

1/3: 1/3-stop

1/1: 1-stop

You can change the manual ISO speed setting increments to 1stop.



Even if [1/1] is set, ISO speed will be automatically set in 1/3-stop increments when Auto ISO is set

Bracketing auto cancel

ON: Enable

When you set the power switch to < **OFF**>, the AEB and white balance bracketing settings will be canceled. AEB will also be canceled when the flash is ready to fire or if you switch to movie shooting.

OFF: Disable

The AEB and white balance bracketing settings will not be canceled even if you set the power switch to **OFF**>. (If the flash is ready to fire or if you switch to movie shooting, AEB will be canceled temporarily, but the AEB range will be retained.)

Bracketing sequence

The AEB shooting sequence and white balance bracketing sequence can be changed.

0-+: 0, -, +

-0+: -, 0, +

+0-: +, 0, -

AEB	White Balance Bracketing			
ALB	B/A Direction	M/G Direction		
0 : Standard	0 : Standard white balance	0 : Standard white balance		
exposure	O . Standard write balance	U . Stariuaru Wille Dalarice		
- : Decreased exposure	- : Blue bias	- : Magenta bias		
+ : Increased exposure	+ : Amber bias	+: Green bias		

Number of bracketed shots

The number of shots taken with AEB and white balance bracketing can be changed from the default, 3 shots, to 2, 5, or 7 shots.

When [Bracketing sequence: 0, -, +] is set, the bracketed shots will be taken as shown in the table below.

3: 3 shots

2: 2 shots 5: 5 shots

7: 7 shots

(1-stop increments)

	1st Shot	2nd Shot	3rd Shot	4th Shot	5th Shot	6th Shot	7th Shot
3: 3 shots	Standard (0)	-1	+1				
2: 2 shots	Standard (0)	±1					
5: 5 shots	Standard (0)	-2	-1	+1	+2		
7: 7 shots	Standard (0)	-3	-2	-1	+1	+2	+3



If [2 shots] is set, you can select the + or - side when setting the AEB range. Setting WB bracketing will result in a decreased exposure in the B/A or M/G direction.

Safety shift

OFF: Disable

Tv/Av: Shutter speed/Aperture

This takes effect in the shutter-priority AE (Tv) and aperture-priority AE (Av) modes. If the subject brightness changes and the standard exposure cannot be obtained within the autoexposure range, the camera will automatically change the manually-selected setting to obtain a standard exposure.

ISO: ISO speed

This works in the Program AE (\mathbf{P}), shutter-priority AE (\mathbf{Tv}), and aperture-priority AE (\mathbf{Av}) modes. If the subject brightness changes and the standard exposure cannot be obtained within the autoexposure range, the camera will automatically change the manually set ISO speed to obtain a standard exposure.



- The minimum and maximum ISO speeds of the safety shift using the ISO speed will be determined by the [Auto ISO range] setting (p.162).
 However, if the manually set ISO speed exceeds the [Auto ISO range], the safety shift will take effect up or down to the manually set ISO speed.
- Safety shift will take effect if necessary even when flash is used.

Same exposure for new aperture

If the <**M**> mode (manual exposure shooting) is set and the ISO speed is set manually (other than Auto ISO or H (12800) is set), the maximum aperture's f/number may change to a higher number (smaller aperture) if you do any of the following: 1. Change the lens, 2. Attach or detach an Extender, or 3. Use a zoom lens whose maximum aperture f/number changes. If you then shoot at the exposure setting as is, the image will be underexposed by the amount the maximum aperture f/number changes to a higher number. However, by changing the ISO speed or shutter speed (Tv) automatically, you can obtain the same exposure that would be obtained before you did 1, 2, or 3.

OFF: Disable

Automatic changes in settings to maintain the specified exposure will not be applied. The ISO speed, shutter speed, and aperture already set will be used for shooting. If you do 1, 2, or 3 and the maximum aperture f/number increases, adjust the ISO speed and shutter speed before you shoot.

ISO: ISO speed

If you do 1, 2, or 3, the ISO speed will automatically increase to compensate for the amount that the maximum aperture f/number increases by. The same exposure that would be obtained before you did 1, 2, or 3 is thereby obtained.

Tv: Shutter speed

If you do 1, 2, or 3, a slower shutter speed will automatically be set to compensate for the amount that the maximum aperture f/number increases by. The same exposure that would be obtained before you did 1, 2, or 3 is thereby obtained.



- This function does not work with macro lenses whose actual aperture f/number changes when the magnification changes.
 - This function does not work with movies
 - If [ISO speed] is set and the exposure cannot be maintained within the range set with [ISO speed range], the ISO speed will be automatically switched within the specified range.
 - If [Shutter speed] is set and the exposure cannot be maintained within the range set with [.Q.2: Set shutter speed range], the shutter speed will be automatically switched within the specified range.
 - If you do 1, 2, or 3 and the camera turns off (power switch is set to <OFF>, etc.) while the exposure is being maintained, the standard exposure will be updated to the exposure at the moment the camera turns off



- This function also works with changes in the highest f/number (minimum aperture).
- If you set [ISO speed] or [Shutter speed], do 1, 2, or 3, and then undo 1, 2, or 3 without manually changing the ISO speed, shutter speed, or aperture, so that the camera is back to its original state, the original exposure setting will be restored.
- If [ISO speed] is set and the ISO speed increases to an expanded ISO speed, the shutter speed may change to maintain the exposure.

C.Fn2: Exposure

Set shutter speed range

You can set the shutter speed range. In the $\langle Tv \rangle \langle M \rangle$ modes, you can set the shutter speed manually within the shutter speed range that you have set. In the <**P**> <**Av**> modes, the shutter speed will be set automatically within the shutter speed range that you have set.

Highest speed

You can set it from 1/8000 sec. to 15 sec.

Lowest speed

You can set it from 30 sec. to 1/4000 sec.

Set aperture range

You can set the aperture range. In the <Av> <M> modes, you can set the aperture manually within the aperture range that you have set. In the <**P**> <**Tv**> modes, the aperture will be set automatically within the aperture range that you have set.

Min. aperture (Max. f/)

You can set it from f/91 to f/1.4.

Max. aperture (Min. f/)

You can set it from f/1 0 to f/64



The settable aperture range will differ depending on the lens's maximum and minimum apertures.

C.Fn3: Others

Warnings () in viewfinder

When any of the following functions are set, the < 1 > icon can be displayed in the viewfinder (p.31).

Select the function for which you want the warning icon to appear, and press $\langle \mathfrak{st} \rangle$ to append a $\langle \checkmark \rangle$. Then select [OK] to register the setting.

When monochrome sim is set

If the Picture Style is set to [Monochrome] (p.166), the warning icon will appear.

When WB is corrected

If white balance correction is set (p.179), the warning icon will appear.

When one-touch image quality is set

If you change the image-recording quality with the one-touch image quality function (p.424), the warning icon will appear.

When ™ is set

If [3: High ISO speed NR] is set to [Multi Shot Noise Reduction (p.183), the warning icon will appear.

When spot metering is set

If the metering mode is set to [Spot metering] (p.213), the warning icon will appear.

If you set any of the checkmarked [<] functions, < • > will also appear for the respective setting displayed on the Quick Control screen (p.60) and Custom Quick Control screen (p.427).

Dial direction during Tv/Av

- → : Normal

+⁻ : Reverse direction

Dial turning direction when setting the shutter speed and aperture can be reversed.

In the <**M**> shooting mode, the turning direction of the < $\stackrel{\frown}{\bigtriangleup}>$ and < $\bigcirc>$ dials will be reversed. In other shooting modes, the turning direction of only the < $\stackrel{\frown}{\bigtriangleup}>$ dial will be reversed. The < $\bigcirc>$ dial's turning direction in the <**M**> mode and the turning direction to set the exposure compensation in the <**P**>, <**Tv**>, and <**Av**> mode will be the same

Multi function lock

When the <LOCK►> switch is set to the right, it can prevent the <△>, <①>, and <↔> from accidentally changing a setting.

Select the camera control you want to lock, then press <⊕> to append a checkmark [√]. Select [OK] to register the setting.

- Main Dial
- Quick Control Dial
- Multi-controller



- If the <LOCK▶> switch is set and you try to use any of the locked camera controls, <L> will appear in the viewfinder and on the LCD panel. Also, [LOCK] will appear on the Quick Control screen (p.60) and Custom Quick Control screen (p.427).
- By default, when locked, the < > dial will be locked.
- Even if the <<p>> dial is appended with a [√] checkmark, you can still use the touch pad <</p>

Custom Controls

You can assign often-used functions to camera buttons or dials according to your preferences. For details, see page 413.

Add cropping information

If you set cropping information, vertical lines for the aspect ratio you have set will appear on the Live View image. You can then compose the shot as if you were shooting with a medium- or large-format camera (6x6 cm, 4x5 inch, etc.).

When you take a picture, the aspect ratio information for cropping the image with the EOS software will be appended to the image. (The image is recorded to the card without being cropped.)

After the image is transferred to a computer, you can use Digital Photo Professional (EOS software, p.520) to easily crop the image to the aspect ratio that was set.

OFF: Off 6:7: Aspect ratio 6:7
6:6: Aspect ratio 6:6 5:6: Aspect ratio 10:12
3:4: Aspect ratio 3:4 5:7: Aspect ratio 5:7

4:5 : Aspect ratio 4:5



- If [4: Crop/aspect ratio] is set to any setting other than [Full-frame], the cropping information cannot be set.
- Cropping information will also be appended for viewfinder shooting.
 However, the cropping range will not be displayed.
- Even if a RAW image with cropping information added is processed with the camera (p.364), the JPEG image cannot be saved as the cropped image.

Default Erase option

During image playback and image review after image capture, when you press the <m> button, the erase menu appears (p.358). You can set which option. [Cancel] or [Erase], is to be preselected on this screen.

If [**Erase**] is set, you can just press < (EFT) > to quickly erase the image.

in : [Cancel] selected

im: [Erase] selected



If [Erase] is set, be careful not to erase an image accidentally.

Retract lens on power off

This is to set the lens retraction mechanism for when a gear-driven STM lens (such as EF40mm f/2.8 STM) is attached to the camera. You can set it to retract the extended lens automatically when the camera's power switch is set to < OFF >.

ON: Enable **OFF: Disable**




- With auto power off, the lens will not retract regardless of the setting.
- Make sure that the lens has been retracted before detaching it.



When [Enable] is set, this function takes effect regardless of the lens's focus mode switch setting (AF or MF).

. P. 3: Custom Controls ★

You can assign often-used functions to camera buttons or dials according to your preferences.







Select [1 3: Custom Controls].

- Under the [.....3] tab, select [Custom Controls]. then press < (SET) >.
- The Custom Controls screen to select control buttons and dials will appear.

Select a camera button or dial.

- Select a camera button or dial, then press < (SET) >.
- The name of the camera control and the assignable functions will be displayed.

Assign a function.

- Select a function, then press < (st) >.
- If the [INFO] icon appears on the bottom left, you can press the <INFO.> button and set other related options.

Exit the setting.

- When you press < (FET) > to exit the setting, the screen in step 2 will reappear.
- Press the < MFNII > button to exit



With the screen in step 2 displayed, you can press the <ਜ਼> button to revert the Custom Control settings to their defaults. Note that the [.....3: Custom Controls] settings will not be canceled even if you select [...4: Clear all Custom Func. (C.Fn)].

Assignable Functions to Camera Controls

	Function			•	AF-ON	*
	® AF	Metering and AF start		0	○*1	O*1
	AF-OFF	AF stop	419		0	0
	AF⊹	Switch to registered AF function				
ш	ONE SHOT. AI SERVO	ONE SHOT AI SERVO	420		0	0
AF	□ PP	Switch to registered AF point				
	-≣-	AF point direct selection				
	-B-‡	Direct AF point selection: Vertical	421			
	SERVO AF	Pause Movie Servo AF				
	(3)	Metering start	421	0		
	*	AE lock	721		0	0
	*	AE lock (while button pressed)		0		
	Х н	AE lock (hold)			0	0
بو	*AF-OFF	AE lock, AF stop	422		0	0
Exposure	FEL	FE lock			0	0
Exp	ISO <u>₹</u>	Set ISO speed (hold button, turn 🔭)				
	ISO@	Set ISO speed (during metering)				
	Z₹	Exposure compensation (hold button, turn 🤲)				
	Tv	Shutter speed setting in M mode	423			
	Av	Aperture setting in M mode				

0	LENS	M-Fn	SET	*	•	(\$ <mark>\$</mark> \$
	0					
0	0					
○*2	○*2					
0	0					
○*3	○*3					
					0	○*4
					0	
0			0			
0	0	0				
0	0	0				
0		0				
			0			
					0	
			0			
				0	0	
				0	0	



< (LEXE) > stands for "AF stop button" provided on super telephoto lenses equipped with Image Stabilizer.

Assignable Functions to Camera Controls

	Function		Page	•	AF-ON	*
		Switch between crop/aspect	423			
ý	RAW JPEG	One-touch image quality setting				
Images	RAW H	One-touch image quality (hold)	424			
드	#	Image quality				
	3.4	Picture Style	425			
	O	Depth-of-field preview				
	((世))	IS start	425			
	MENU	Menu display				
	YO.	Register/recall shooting function			O*7	○*7
tion	▶	Image playback				
Operation	Q	Magnify/Reduce (press SET, turn ★)				
		Cycle: 22 • 150 /Drive • AF/WB • 1	426			
	UNLOCK Unlock while button pressed					
	3 0	Flash function settings				
	OFF	No function (disabled)			0	0

0	LENS	M-Fn	SET	*	•	0,00
		○*5				
○*6		○*6				
○*6		○*6				
			0			
			0			
0						
0	0					
			0			
			0			
			0			
		0				
0						
			0			
0			0	0	0	0



< (LEXE) > stands for "AF stop button" provided on super telephoto lenses equipped with Image Stabilizer.

SAF: Metering and AF start

When you press the button assigned to this function, metering and AF are executed.

*1:When assigned to the <AF-ON> or <★> button, pressing the <INFO.> button while the setting screen is displayed will enable you to set the detailed AF settings. When shooting, pressing the <AF-ON> or <★> button will execute AF as it was set.



AF start position

When [**Registered AF point**] is set, you can press the <AF-ON> or <★> button to switch to the registered AF point.

Registering the AF Point

- 1. Set the AF area selection mode to one of the following: Single-point Spot AF (manual selection), Single-point AF (manual selection), AF point expansion (manual selection "#"), AF point expansion (manual selection, surrounding points), or 61-point automatic selection AF. Zone AF (manual selection of zone) cannot be selected.
- 2. Select an AF point manually.
- 3. Hold down the <ः > button and press the <ः > button. A beep will sound and the AF point will be registered. If the AF area selection mode is set to any setting other than 61-point automatic selection AF, the registered AF point will blink.



- When the AF point is registered, the following will be displayed:
 - 61-point automatic selection AF: [] HP (HP: Home Position)
 - Spot AF, 1 pt AF, Expand AF Area: SEL[] (Center), SEL HP (Off center)

- AI Servo AF characteristics (p.109)
 Press the <AF-ON> or <★> button to perform AF with the set case from [Case1] to [Case6].
- AF operation (p.86)
 Press the <AF-ON> or <★> button to perform AF with the set AF operation.
- AF area selection mode (p.90)
 Press the <AF-ON> or <★> button to perform AF with the set AF area selection mode.



- If [AF4: Orientation linked AF point] is set to [Separate AF pts: Area+pt] or [Separate AF pts: Pt only], you can register the AF points to be used separately for vertical (grip up or down) and horizontal shooting.
- If [AF start position: Registered AF point] and [AF area selection mode] are both set, [Registered AF point] will take effect.

AF-OFF: AF stop

The AF will stop while you hold down the button assigned to this function. Convenient when you want to stop the AF during AI Servo AF.

AF-: Switch to registered AF function

After setting and assigning this function to a button, you can apply the following settings by holding down the assigned button for AF: AF area selection mode (p.90), Tracking sensitivity (p.114), Acceleration/ deceleration tracking (p.115), AF point auto switching (p.116), Servo 1st image priority (p.118), and Servo 2nd image priority (p.119). Convenient when you want to change the AF characteristics during AI Servo AF.

*2:On the setting screen, press the <INFO.> button to display the detailed settings screen. Turn the <\pre>O < \limes > dial to select the parameter to be registered, then press <\limes > to append a checkmark [\sqrt{]}. When you select a parameter and press <\limes >, you can adjust the parameter. By pressing the <\limes > button, you can revert the settings to their defaults.



ONE SHOT AL SERVO

You can switch the AF operation. In One-Shot AF mode, when you hold down the button to which this function is assigned, the camera switches to AI Servo AF mode. In the AI Servo AF mode, the camera switches to One-Shot AF mode only while you hold down the button. Convenient when you need to keep switching between One-Shot AF and AI Servo AF for a subject that keeps moving and stopping.

□ ੈ _{IP}: Switch to registered AF point

During metering, when you press the button assigned to this function, focusing point can be switched to the registered AF point.

*3:On the setting screen, when you press the <INFO.> button, you can select [Switch only when btn is held] or [Switch each time btn is pressed]. To register the AF point, see page 418.

: Direct AF point selection

During metering, you can select an AF point directly with the < >> dial or <<<p>> without pressing the <</p>
⇒ button. With the <</p>
⇒ dial, you can select a left or right AF point. (Looping sequence for Zone AF.)

*5:On the Multi-controller setting screen, when you press the < INFO. > button, you can press the center of < ?> to select [Switch to center AF point] or [Switch to registered AF point]. To register the AF point, see page 418.

- : Direct AF point selection: Vertical

During metering, you can turn the <>> dial to directly select an upper or lower AF point without pressing the < := > button. (Looping sequence for Zone AF.)

:: Pause Movie Servo AF

During Movie Servo AF, you can pause the AF by pressing the Depthof-field preview button or < (set) >. Press the button again to resume Movie Servo AF

(a): Metering start

When you press the shutter button halfway, exposure metering is performed (AF is not performed).

*: AE lock

When you press the button assigned to this function, you can lock the exposure (AE lock) during metering. Convenient when you want to focus and meter the shot at different areas or when you want to take multiple shots at the same exposure setting.



To change the aperture in <M> mode when [Direct AF point selection], [Direct AF pt select: Vertical], or [Set ISO speed (* during metering)] (p.422) is assigned to <>>, turn the <<>> dial while holding down the < * > button.

X: AE lock (while button pressed)

The exposure will be locked (AE lock) while you press the shutter button.

★H: AE lock (hold)

When you press the button assigned to this function, you can lock the exposure (AE lock). The AE lock will be maintained until you press the button again. Convenient when you want to focus and meter the shot at different areas or when you want to take multiple shots at the same exposure setting.

*AF-OFF: AE lock, AF stop

When you press the button assigned to this function, you can lock the exposure (AE lock) and the AF will stop. Convenient during AI Servo AF if you want AE lock at the same time when AF stops.

FEL: FE lock

During flash photography, pressing the button assigned to this function will fire a preflash and record the required flash output (FE lock).

|\$0 €: Set ISO speed (hold button, turn 🎮)

You can set the ISO speed by holding down < (arr) > and turning the < (3) > dial.

If this control is used while Auto ISO is set, manual ISO speed setting will take effect. Auto ISO cannot be set. If you use this function in the <**M**> mode, you can adjust the exposure with the ISO speed while maintaining the current shutter speed and aperture.

|SO : Set ISO speed (during metering)

During metering, you can set the ISO speed by turning the < \bigcirc > dial. The settable range is the same as with $|SO \oplus E|$.



If you assign [AE lock (while button pressed)] to the shutter button, any buttons assigned to [AE lock] or [AE lock (hold)] will also work as [AE lock (while button pressed)].

½ : Exposure compensation (hold button, turn **¾**)

You can set the exposure compensation by holding down < (EET) > and turning the < dial. Convenient when you want to set exposure compensation while < M > manual exposure and Auto ISO are set.

Ty: Shutter speed setting in M mode

In manual exposure < M>, you can set the shutter speed with the <
\(\) or < \(\) > dial.

Av: Aperture setting in M mode

In manual exposure $\langle \mathbf{M} \rangle$, you can set the aperture with the $\langle \bigcirc \rangle$ or < ঐ _ dial.

□: Switch between crop/aspect

When you press the <M-Fn> button, you can switch from full-frame shooting to crop shooting (approx. 1.3x or 1.6x) or shooting with the set aspect ratio (1:1, 4:3, or 16:9). Pressing the <M-Fn> button switches the setting.

*5: On the setting screen, press the < INFO. > button to display the detailed settings screen. Turn the <0> dial to select the setting to be switched to, then press < (ET) > to append a checkmark [].





The operations for [Set ISO speed (hold btn, turn 🖚)] (p.422) and [Expo comp (hold btn, turn ♣)] are possible even when the <LOCK►> switch is set to the right (Multi function lock, p.59).

RAW: One-touch image quality setting

Pressing the button assigned to this function will switch to the imagerecording quality set here. While this change is in effect, the imagerecording quality (JPEG/RAW) will blink in the viewfinder (with [Show/ hide in viewfinder]'s [Image quality] checkmarked). After the shooting ends, the One-touch image quality setting will be canceled and the image-recording quality will be switched back to the previous quality.

*6: On the setting screen, by pressing the < INFO. > button, you can select the imagerecording quality for this function.

RAW H: One-touch image quality (hold)

Pressing the button assigned to this function will switch to the imagerecording quality set here. While this change is in effect, the imagerecording quality (JPEG/RAW) will blink in the viewfinder (with [Show/ hide in viewfinder]'s [Image quality] checkmarked). Even after shooting, the One-touch image quality setting will not be canceled. To revert to the previous image-recording quality setting, press the button assigned to this function again.

*6: You can select the image-recording quality for this function by pressing the < INFO.> button in the setting screen.

Press < (st) > to display the image-recording quality setting screen (p.149) on the LCD monitor.



If RAW or RAW+JPEG is set for the image-recording quality to be switched to with [One-touch image quality setting] and [One-touch image quality (hold)], [Multi Shot Noise Reduction] (p.183) will not work after the switch. For [3: High ISO speed noise reduct'n], [Standard] will be applied for shooting.



When the image-recording quality is switched with the One-touch image quality setting, you can display < 1> in the viewfinder (p.409).

≈ : Picture Style

Press <(E)> to display the Picture Style selection setting screen on the LCD monitor (p.164).

: Depth-of-field preview

When you press the depth-of-field preview button, the aperture will stop down and you can check the depth of field (p.209).

((♦)): IS start

If you press the button assigned to this function when the lens's IS switch is set to **<ON**>, lens's Image Stabilizer will operate (p.55).

MENU: Menu display

Press <(ET) > to display the menu on the LCD monitor.

`□': Register/recall shooting function

You can manually set the main shooting functions such as the shutter speed, aperture, ISO speed, metering mode and AF area selection mode, and register them to the camera. Only while you hold down the button assigned to this function, you can recall and use the registered shooting function settings and shoot.

*7:On the setting screen, press the <INFO.> button to display the detailed settings. Turn the <□> or < ⟨□> dial to select the function to be registered, then press < ⟨⊕⟩ to append a checkmark [√] to it. When you select a function and press < ⟨⊕⟩, you can adjust the setting. By pressing the < ⟨□⟩ button, you can revert the settings to their defaults. By selecting [Register current settings], the camera's current settings will be registered. To register the AF point, see page 418.



▶: Image playback

Pressing < (str) > will play back images.

Q: Magnify/Reduce (press SET, turn 🙈)

Press < (a) to magnify or reduce the images recorded on the card. See page 330 for the operation procedure. During Live View or movie shooting (except :+Tracking), you can also magnify the image (p.274, 275).

__ : Cycle: 22 • 50/Drive • AF/WB • 3

Pressing the $\langle M-Fn \rangle$ button changes the settable function in this sequence: $\mathbb{Z} \times \mathbb{R} \to \mathbb{R} \to \mathbb{R} \times \mathbb{R} \to \mathbb{R}$.

UNLOCK ±: Unlock while button pressed

Even when the <LOCK > switch is set to the right, only while you hold down the depth-of-field preview button, you can use the camera control buttons and dials restricted by [....3: Multi function lock].

📭 : Flash function settings

Pressing < (SET) > will display the flash function setting screen.

OFF: No function (disabled)

Use this setting when you do not want to assign any function to the button.

Custom Quick Control


On the standard Quick Control screen (p.60), pre-determined shooting functions are displayed in the default layout. On the Custom Quick Control screen, you can customize the screen with your preferred shooting functions and layout. This feature is called "Custom Quick Control".

This page explains how to change the layout of the Custom Quick Control screen. Page 61 explains how to use the Quick Control screen, and page 442 explains how to display the Custom Quick Control screen.



Select [Custom Quick Control].

 Under the [¥3] tab, select [Custom Quick Control], then press <(€).



Select [Start editing layout].



Read the operation procedure and select [OK].

• Q : Add item



 Items displayed on the default screen are shown on the left.







Add an item.

- Press the <Q> button.
- Turn the < > dial or use < -> > to select the item to be added, then press < (SET) >.
- To remove an item, select the item. then press the < 而 > button. Otherwise, select [Clear all items] in step 2.
- For items that let you select the icon size, turn the < >> dial or use < +>> to select the size, then press < (set) >.
- For items which can be positioned and for display sizes, see page 430.

Position the item.

- Use <\(\frac{\mathcal{C}}{\mathcal{C}}\)>, <\(\frac{\mathcal{C}}{\mathcal{C}}\)> to move the item (framed with directional wedges) to the desired position.
- If you want to change the size, press the <INFO.> button to change it.
- Press < (SET) > to place the item. If there is already an item on that position, it will be overwritten (deleted).
- To move an item to another position. select the item and press < (ET) > to move it



If you first want to delete all the items displayed by default, select [Clear all items] in step 2 and then go to step 4.

Sample layout



- Repeat steps 4 and 5 to position other items as desired
- To delete an item already in position, select it and press the < m̄ > button.

Exit the setting.

 Press the <MENU> button to exit the setting. The screen in step 2 will reappear.

Sample screen



Check the setting screen.

- Under [¥3: [Nio] button display options], check that [Custom Quick Control screen] is checkmarked (p.442).
- Press the <INFO.> button to display the Custom Quick Control screen (p.442) and check the layout.
- Press the <Q> button to use the Quick Control screen (p.61).

Resetting the Custom Quick Control Screen or Clearing All Items

In step 2, selecting [Revert layout to default] will revert the Custom Quick Control screen to the default layout of Custom Quick Control screen (p.427).

Selecting [Clear all items] will delete all the items set. The screen will then be blank

Available Items and Display Sizes for the Screen Layout

(Vertical x horizontal cells)

Item and Size	1x1	1x2	1x3	2x2	2x3
Shooting mode	0			0	
Shutter speed	0	0			
Aperture	0	0			
ISO speed	0	0			
Exposure compensation/ AEB setting	0	0	0		
Flash exposure compensation	0	0	0		
Picture Style	0		0		
White balance	0	0			
White balance shift/ bracketing	0	0			
Auto Lighting Optimizer	0				
Custom Controls	0				
AF operation	0	0			
AF point selection	0				0
Metering mode	0				
Drive mode	0				
Recording function/ card selection	0	0		0	
Date/Time/Zone	0	0			0
External Speedlite control	0				
Highlight tone priority	0				
Viewfinder grid	0				
Sensor cleaning	0				



- Depending on the items, the amount of displayable information and settable functions for Quick Control may vary due to their display sizes.
- The same item cannot be placed in multiple positions on the screen.

<△ > Mode Settings and Display Conditions

You can also set Custom Quick Control and display the Custom Quick Control screen in the (基*) mode.

However, functions such as [Expo.comp./AEB] that are not displayed on the menu screen for [A] > mode will not appear on the Custom Quick Control screen. Also, [ISO speed] and other functions that cannot be set with the Quick Control screen in the (A) > mode will be grayed out.

Not displayed


Exposure compensation/AEB, Flash exposure compensation, White balance shift/bracketing, Custom Controls, External Speedlite control, Highlight tone priority

Grayed out (not settable with the Quick Control screen)
 Shutter speed, Aperture, ISO speed, Picture Style, White balance,
 Auto Lighting Optimizer, AF operation, AF point selection, Metering mode

MENU Registering My Menu[★]

Under My Menu tab, you can register menu items and Custom Functions whose settings you change frequently. You can also name the registered menu tabs and press the <**MENU**> button to display the My Menu tab first.

Adding My Menu Tab



Select [Add My Menu tab].


 Under the [★] tab, select [Add My Menu tab], then press <(sir)>.



Select [OK].

- The [MY MENU1] tab is created.
- You can create up to five menu tabs by repeating steps 1 and 2.

Registering Menu Items under the My Menu Tab(s)




Select [Configure: MY MENU*].

Turn the < > dial to select [Configure: MY MENU*] (tab for registering menu items), then press < >



Select [Select items to register].



Register the desired items.

- Select the desired item, then press <(set) >.
- Select [OK] on the confirmation dialog.
- You can register up to six items.
- To return to the screen in step 2, press the < MENU > button.

My Menu Tab Settings



You can sort and delete items under the menu tab, and rename or delete the menu tab.

Sort registered items

You can change the order of the registered items in My Menu. Select [**Sort registered items**] and select the item whose order you want to change. Then press < (E) >. With [\$] displayed, turn the < () > dial to change the order, then press < (E) >.


Delete selected items / Delete all items on tab
 You can delete any of the registered items. [Delete selected items]
 deletes one item at a time, and [Delete all items on tab] deletes all registered items.

Delete tab

You can delete the My Menu tab currently displayed. Select [**Delete tab**] to delete the [**MY MENU***] tab.

Rename tab

You can rename the My Menu tab from [MY MENU*].






Enter text.

- Press the < m̄ > button to delete any unnecessary characters.
- Press the <Q> button. The text palette will be highlighted with a color frame, and text can be entered.
- Operate the <<p>> dial or <</p>
 > to move the
 □ and select the desired character. Then press <<p>> to enter it.
- You can enter up to 16 characters.

Exit the setting.

- After entering the text, press the <MENU> button, then select [OK].
- The name is saved.

Deleting all My Menu tabs / Deleting all items



You can delete all My Menu tabs and delete all My Menu items.

- Delete all My Menu tabs You can delete all My Menu tabs. When you select [Delete all My Menu tabs], all the tabs from [MY MENU1] to [MY MENU5] will be deleted and the [★] tab will revert to its default.
- Delete all items
 You can delete all the items registered under the [MY MENU1] to
 [MY MENU5] tabs and keep the tabs. The menu tab(s) will remain.
 When [Delete all items] is selected, all the items registered under all the created tabs will be deleted.



If you do [Delete tab] or [Delete all My Menu tabs], tab names renamed with [Rename tab] will also be deleted.

Menu Display Settings




You can select [Menu display] to set the menu screen that is to appear first when you press the <MENU> button.

- Normal display
 Displays the last displayed menu screen.
- Display from My Menu tab
 Displays with the [★] tab selected.
- Display only My Menu tab
 Only the [★] tab is displayed. (The ♠, AF, ▶, ♠, and ♠. tabs will not be displayed.)

You can register current camera settings, such as the shooting mode, menu functions, and Custom Function settings, as Custom shooting modes under the Mode Dial's < 3, < 2, and < 5, positions.





 Under the [¥4] tab, select [Custom shooting mode (C1-C3)], then press <(€1)>.



Select [Register settings].

Register the Custom shooting mode.

- Select the Custom shooting mode to be registered, then press < (set) >.
- Select [OK] on the confirmation dialog.
- The current camera settings (p.438-439) will be registered under the Mode Dial's C* position.

Automatic Updating

Canceling Registered Custom Shooting Modes

In step 2, if you select [Clear settings], the settings of respective modes will revert to the default settings with no Custom shooting modes registered.

Settings To Be Registered

Shooting functions

Shooting mode, Shutter speed, Aperture, ISO speed, AF operation, AF area selection mode, AF point, Drive mode, Metering mode, Exposure compensation amount, Flash exposure compensation amount

Menu functions

- [1] Image quality, Image review time, Beep, Release shutter without card, Lens aberration correction, Flash firing, E-TTL II flash metering, Flash sync speed in Av mode
- [2] Exposure compensation/AEB, ISO speed settings, Auto Lighting Optimizer, White balance, Custom White Balance, White balance shift/bracketing, Color space
- [1 Picture Style, Long exposure noise reduction, High ISO speed noise reduction, Highlight tone priority, Multiple exposure (settings), HDR Mode (settings)
- [4] Interval timer, Bulb timer, Anti-flicker shooting, Mirror lockup, Crop/aspect ratio

[5 (Live View shooting)]

Live View shooting, AF method, Continuous AF, Grid display, Exposure simulation

[6 (Live View shooting)]

Silent LV shooting, Metering timer

[4 (Movie)]

Movie Servo AF, AF method, Grid display, Movie recording size, Sound recording

[15 (Movie)]

Silent LV shooting, Metering timer, Movie recording count, Movie play count, Silent control, button function, Timelapse movie (settings)

- [AF1] Case 1, Case 2, Case 3, Case 4, Case 5, Case 6
- [AF2] Al Servo 1st image priority, Al Servo 2nd image priority

- [AF3] Lens electronic MF, AF-assist beam firing, One-Shot AF release priority
- [AF4] Lens drive when AF impossible, Selectable AF point, Select AF area selection mode, AF area selection method, Orientation linked AF point, Initial AF point, (3) AI Servo AF, Auto AF point selection: EOS iTR AF
- [AF5] Manual AF point selection pattern, AF point display during focus. VF display illumination. AF Microadiustment
- [**2**] Slide show (settings), Image jump with \triangle
- [3] Highlight alert, AF point display, Playback grid, Histogram display, Movie play count, Magnification (approx.)
- [¥1] File numbering, Auto rotate, Eye-Fi settings
- [**42**] Auto power off, LCD brightness, Viewfinder display
- [43] Auto cleaning, [NEO] button display options, RATE button function
- [....1] Exposure level increments, ISO speed setting increments, Bracketing auto cancel, Bracketing sequence, Number of bracketed shots. Safety shift. Same exposure for new aperture
- [.0.2] Set shutter speed range. Set aperture range
- [. 3] Dial direction during Tv/Av, Multi function lock, Custom Controls, Add cropping information, Default Erase option, Retract lens on power off



My Menu settings will not be registered under Custom shooting modes.



- change shooting function settings and menu settings.
- By pressing the <INFO.> button, you can check which shooting mode is registered under < >, < >, and < > (p.442-444).

MEMO			

Reference

This chapter provides reference information for camera features, system accessories, etc.



Certification Logo

Select [4: Certification Logo Display] and press < (ET) > to display some of the logos of the camera's certifications. Other certification logos can be found in this Instruction Manual, on the camera body, and on the camera's package.

INFO. Button Functions






When the camera is ready to shoot, pressing the <INFO.> button can switch the display as follows: Camera settings. Electronic level (p.75), Quick Control screen (p.60), and Custom Quick Control screen (p.427).

Under the [43] tab. [INTO button display options] enables you to select the options displayed when the < INFO.> button is pressed.

- Select the desired display option and press < (SET) > to append a checkmark [**1**].
- After completing the selections, select [OK].






- If you turn off the power while the Electronic level, Quick Control screen, or Custom Quick Control screen is displayed, the same screen will be displayed when you turn on the power again. To cancel this function, press the <INFO.> button a number of times until the screen is blank, then turn off the power switch.
- Note that you cannot remove the [√] for all four display options.
- The [Displays camera settings] sample screen is displayed in English for all languages.
- Even if you uncheck the [Electronic level] so it does not appear, it will still appear for Live View shooting and movie shooting when you press the <INFO.> button.
- While the Quick Control screen or Custom Quick Control screen is displayed, pressing the <Q> button enables you to set a function with Quick Control (p.61).

Camera Settings



^{*} This icon is displayed when the transfer of some images failed.

Quick Control Screen

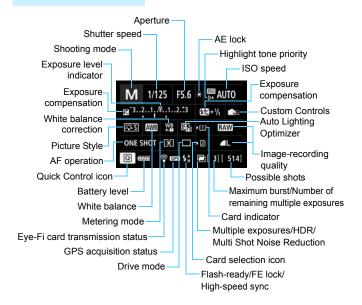

Custom Quick Control Screen

For the Custom Quick Control screen, see page 427.

Button Functions for the Quick Control and Custom Quick Control Screens

When you press the <WB•⑧>, <DRIVE•AF>, <**12**•ISO>, or <**!**> button, the setting screen appears and you can use <*↑*>, <*↑*>, or <M-Fn> to set the functions.



Metering mode / White balance



ISO speed / Flash exposure compensation




AF operation / Drive mode



AF point selection

MENU Checking the Battery Information

You can check the battery's condition on the LCD monitor. Each Battery Pack LP-E6N/LP-E6 has a unique serial number, and you can register multiple batteries to the camera. When you use this feature, you can check the registered batteries' approximate remaining capacity and operation history.



Select [Battery info.].

- Under the [¥3] tab, select [Battery info.], then press <(€).
- The battery info. screen will appear.





Battery model or household power source being used.

The battery level indicator (p.48) is displayed together with the remaining battery level shown in 1% increments.

The number of shots taken with the current battery. The number is reset when the battery is recharged.

Battery's recharge performance level is displayed in one of three levels.

■■■ (Green): Battery's recharge performance is fine.

■■□ (Green): Battery's recharge performance is slightly degraded.

■□□ (Red): Purchasing a new battery is recommended.



Using a genuine Canon Battery Pack LP-E6N/LP-E6 is recommended. If you use batteries that are not genuine Canon products, the camera's full performance may not be attained or malfunction may result.



- The shutter count is the number of still photos taken. (Movies are not counted.)
- The battery information will also be displayed when Battery Pack LP-E6N/LP-E6 is used with Battery Grip BG-E11 (sold separately). If AA/R6 batteries are used, only the remaining battery level will be displayed.



If a battery communication error message is displayed, follow the instructions in the message.

Registering Batteries to the Camera

You can register up to six LP-E6N/LP-E6 batteries to the camera. To register multiple batteries to the camera, follow the procedure below for each battery.



Press the <INFO.> button.

- With the battery info. screen displayed, press the < INFO. > button.
- The battery history screen will appear.
- If the battery is not registered, it will be grayed out.



Select [Register].

The confirmation dialog will appear.

Select [OK].

- The battery will be registered and the battery history screen will reappear.
- The graved out battery number will now be displayed in white.
- Press the <MENU> button. The battery info, screen will reappear.





- The battery cannot be registered if Battery Grip BG-E11 (sold separately) using AA/R6 batteries is attached or the camera is powered by AC Adapter Kit ACK-E6 (sold separately).
- If six batteries are already registered, [Register] cannot be selected. To delete unnecessary battery information, see page 449.

Labeling Serial Numbers on Batteries

It is convenient to label each registered Battery Pack LP-E6N/LP-E6 with their serial numbers, using commercially-available labels.







 Write the serial number displayed on the battery history screen on a label approx. 25 mm x 15 mm / 1.0 in. x 0.6 in. in size.



Remove the battery and affix the label.

- Set the power switch to <OFF>.
- Open the battery compartment cover and remove the battery.
- Affix the label as shown in the illustration (on the side with no electrical contacts).
- Repeat this procedure for all of your batteries so you can easily see the serial number.



- Do not affix the label on any part other than as shown in the illustration in step 2. Otherwise, the misplaced label may make it difficult to insert the battery or impossible to turn on the camera.
- If you use Battery Grip BG-E11 (sold separately), the label may peel off as you repeatedly insert and remove the battery. If it peels off, affix a new label.

Checking the Remaining Capacity of a Registered Battery

You can check the remaining capacity of any battery (even when not installed) and also when it was last used.



Remaining capacity of a battery

Look for the serial number.

- Refer to the battery's serial number label and look for the battery's serial number on the battery history screen.
- You can check the respective battery's remaining capacity and the date when it was last used.

Deleting the Registered Battery Information

- 1 Select [Delete info.].
 - Follow step 2 on page 447 to select [Delete info.], then press <@>;
- Select the battery information to be deleted.
 - Select the battery information to be deleted, then press < (\$\sigma\$).
 - ► [√] will appear.
 - To delete information for another battery, repeat this procedure.
- 3 Press the < m

 > button.
 - The confirmation dialog will appear.
- 4 Select [OK].
 - The battery information will be deleted and the screen in step 1 will reappear.


Using a Household Power Outlet

With AC Adapter Kit ACK-E6 (sold separately), you can connect the camera to a household power outlet and do not have to worry about the remaining battery level.





 Connect the DC Coupler's plug to the AC Adapter's socket.




Connect the power cord.

- Connect the power cord as shown in the illustration.
- After using the camera, unplug the power plug from the power outlet.



Place the cord in the groove.

 Insert the DC Coupler's cord to the groove carefully without damaging the cord.



DC Coupler cord hole

Insert the DC Coupler.

- Open the battery compartment cover and open the DC Coupler cord hole cover.
- Insert the DC Coupler securely until it locks and put the cord through the hole
- Close the cover.




Do not connect or disconnect the power cord or DC Coupler while the camera's power switch is set to <**ON**>.

Using Eye-Fi Cards

With a commercially-available Eye-Fi card already set up, you can automatically transfer captured images to a computer or upload them to an online service via a wireless LAN.

The image transfer is a function of the Eye-Fi card. For instructions on how to set up and use the Eye-Fi card or to troubleshoot any image transfer problems, refer to the Eye-Fi card's instruction manual or contact the card manufacturer.

The camera is not guaranteed to support Eye-Fi card functions (including wireless transfer). In case of a problem with an Eye-Fi card, please check with the card manufacturer. Also note that approval is required to use Eye-Fi cards in many countries or regions. Without approval, use of the card is not permitted. If it is unclear whether the card has been approved for use in your area, please check with the card manufacturer.







Select [Eye-Fi settings].

- Under the [¥1] tab, select [Eye-Fi settings], then press <(€)>.
- This menu is displayed only when an Eye-Fi card is inserted into the camera.

Enable Eye-Fi transmission.

- Select [Eye-Fi trans.], then press <(set)>.
 - Select [Enable], then press < (SET) >.
 - If you set [Disable], there will be no automatic transmission even with the Eye-Fi card inserted (transmission status icon



Display the connection information.

Select [Connection info.], then press < (SET) > .



Check the [Access point SSID:].

- Check that an access point is displayed for [Access point SSID:].
- You can also check the Eye-Fi card's MAC address and firmware version
- Press the <MFNIJ> button to exit the menu.



Transmission status

Take the picture.


- The picture is transferred and the [] icon switches from gray (not connected) to one of the icons below.
- For transferred images, [] is displayed in the shooting information display (p.323).
- (Gray) Not connected: No connection with access point.
- (Blinking) Connecting...: Connecting to access point.
- (Illuminated) Connected: Connection to access point established.
- (†) Transferring...
- : Image transfer to access point in progress.




Cautions for Using Eye-Fi Cards

- If "@" is displayed, an error occurred while retrieving the card information. Turn the camera's power switch off and on again.
- Even if [Eye-Fi trans.] is set to [Disable], it may still transmit a signal. In hospitals, airports, and other places where wireless transmissions are prohibited, remove the Eye-Fi card from the camera.
- If the image transfer does not function, check the Eye-Fi card and computer settings. For details, refer to the card's instruction manual.
- Depending on the wireless LAN's connection conditions, the image transfer may take longer or it may be interrupted.
- The Eye-Fi card may become hot as it transmits.
- The battery power will be consumed faster.
- During the image transfer, auto power off will not take effect.
- If you insert a wireless LAN card other than an Eye-Fi card, [Eye-Fi settings] will not appear. Also, the transmission status icon <>> will not appear.

System Map

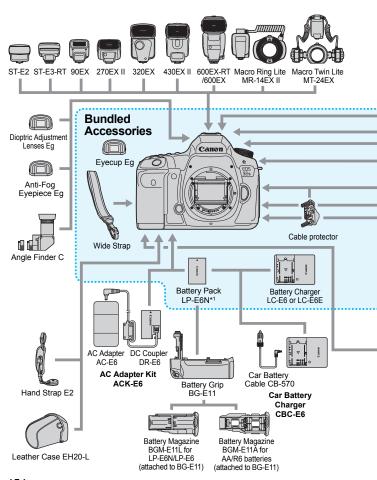

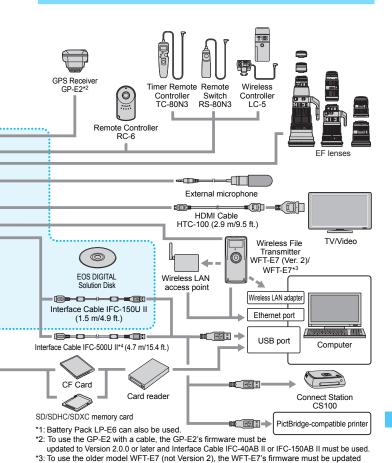

- and Interface Cable IFC-40AB II or IFC-150AB II must be used.
- *4: With IFC-500U II, the communication speed will be equivalent to Hi-Speed USB (USB 2.0).
 - * All cable lengths given are approximate figures.

Function Availability Table According to Shooting Mode

Still Photo Shooting

●: Set automatically ○: User selectable : Not selectable/Disabled

	Function	Œ [‡]	Р	Τv	Αv	М	В
All image quality se	ettings selectable	0	0	0	0	0	0
Crop/aspect ratio			0	0	0	0	0
ISO speed	Automatically set/Auto ISO	•	0	0	0	0	0
loo opecu	Manually set		0	0	0	0	0
Picture Style	Automatically set/Auto	•	0	0	0	0	0
r lotare otyle	Manual selection		0	0	0	0	0
	Auto	•	0	0	0	0	0
	Preset		0	0	0	0	0
White balance	Custom		0	0	0	0	0
	Color temperature setting		0	0	0	0	0
	Correction/Bracketing		0	0	0	0	0
Auto Lighting Opting	nizer	•	0	0	0	0	0
Long exposure nois	Long exposure noise reduction		0	0	0	0	0
High ISO speed noise reduction		•	0	0	0	0	0
Highlight tone prior	rity		0	0	0	0	0
Lens aberration	Peripheral illumination correction	0	0	0	0	0	0
correction	Chromatic aberration correction	0	0	0	0	0	0
Anti-flicker shootin	g* ¹	•	0	0	0	0	0
Color space	sRGB	•	0	0	0	0	0
Color space	Adobe RGB		0	0	0	0	0
	One-Shot AF*1		0	0	0	0	0
	Al Servo AF*1		0	0	0	0	0
	Al Focus AF*1	•	0	0	0	0	0
	AF area selection mode*1		0	0	0	0	0
AF point		•	0	0	0	0	0
	Manual focusing (MF)	0	0	0	0	0	0
	AF Microadjustment*1		0	0	0	0	0
		0	0	0	0	0	0
	FlexZone - Single*2	0	0	0	0	0	0
	Continuous AF*2	0	0	0	0	0	0

	Function	∆ †	Р	Τv	Αv	М	В
	Evaluative metering	•	0	0	0	0	0
Metering	Partial metering		0	0	0	0	0
wetering	Spot metering		0	0	0	0	0
	Center-weighted average metering		0	0	0	0	0
	Program shift		0				
	Exposure compensation		0	0	0	○*3	
	AEB		0	0	0	0	
	AE lock		0	0	0	*4	
Exposure	Depth-of-field preview		0	0	0	0	0
LAPOSUIE	HDR shooting		0	0	0	0	
	Multiple exposures		0	0	0	0	0
	Interval timer*1	0	0	0	0	0	
	Bulb timer						0
	Mirror Lockup*1		0	0	0	0	0
	Single shooting	0	0	0	0	0	0
	High-speed continuous shooting	0	0	0	0	0	0
	Low-speed continuous shooting	0	0	0	0	0	0
Drive	Silent single shooting	0	0	0	0	0	0
	Silent continuous shooting	0	0	0	0	0	0
	10-sec. self-timer/Remote control	0	0	0	0	0	0
	2-sec. self-timer/Remote control	0	0	0	0	0	0
	Flash exposure compensation		0	0	0	0	0
External	FE lock*1		0	0	0	0	0
Speedlite	Function settings		0	0	0	0	0
	Custom Function settings		0	0	0	0	0
Live View shoo	ting	0	0	0	0	0	0
Quick Control	·	0	0	0	0	0	0

^{*1:} Settable only with viewfinder shooting.

^{*2:} Settable only during Live View shooting.
*3: Settable only when Auto ISO is set.

^{*4:} With Auto ISO, you can set a fixed ISO speed.

Movie Shooting

●: Set automatically ○: User selectable □ : Not selectable/Disabled

			М	ovies	•				
	Function	ď	P/B	Τv	Αv	М	Œ [‡]	P/B/Tv/Av	М
		· F A⁺	-	₩ v	™ Av	· <u>™</u> M	• ¶A⁺	東東東	ı≝M
(movie)	uality settings selectable	0	0	0	0	0			
All image q (still photos	uality settings selectable						0	0	0
Time-lapse	movie	0	0	0	0	0			
ISO speed	Automatically set/Auto ISO	•	•	•	•	0	•	•	0
150 speed	Manually set					0			0
Picture	Automatically set/Auto	•	0	0	0	0	•	0	0
Style	Manual selection		0	0	0	0		0	0
	Auto	•	0	0	0	0	•	0	0
	Preset		0	0	0	0		0	0
White	Custom		0	0	0	0		0	0
balance	Color temperature setting		0	0	0	0		0	0
	Correction		0	0	0	0		0	0
	Bracketing							0	0
Auto Lighti	ng Optimizer	•	0	0	0	0	•	0	0
Long expos	sure noise reduction								
	peed noise reduction*2	•	0	0	0	0	•	0	0
Highlight to			0	0	0	0		0	0
Lens aberration	Peripheral illumination correction	0	0	0	0	0	0	0	0
correction	Chromatic aberration correction	0	0	0	0	0	0	0	0
Color	sRGB	•	•	•	•	•	•	0	0
space	Adobe RGB							0	0
	∵+Tracking	0	0	0	0	0	0	0	0
AF	FlexiZone - Single	0	0	0	0	0	0	0	0
Ci.	Manual focusing (MF)	0	0	0	0	0	0	0	0
	Movie Servo AF	0	0	0	0	0	0	0	0

Still Photos*1				s	lovie	M			
М	P/B/Tv/Av	Δ [†]	М	Αv	Τv	P/B	Œ [†]	Function	
₩M	> • • • • • • • • • • • • • • • • • • •	• ∰A [†]	μM	壕	Щ٧	*	¥,		
•	•	•	•	•	•	•	•	ing	
								Program shift	
*3	0		*3	0	0	0		AE lock	
O*4	0		O*4	0	0	0		sure Exposure compensation	
								AEB	
								Depth-of-field preview	
0	0	0						Single shooting	
0	0	0						High-speed continuous shooting	
0	0	0						Low-speed continuous shooting	
0	0	0						Silent single shooting	
0	0	0						Silent continuous shooting	
0	0	0						10-sec. self-timer/ Remote control*5	
0	0	0						2-sec. self-timer/Remote control*5	
								External Speedlite	
			0	0	0	0	0	d recording	
			0	0	0	0	0	Time code	
0	0	0	0	0	0	0	0	Control	
			0	0	0	0	0	2-sec. self-timer/Remote control ⁻⁵ nal Speedlite d recording code	

^{*1:} Indicates still photo shooting during movie shooting.

^{*2:} Multi Shot Noise Reduction cannot be set.

^{*3:} With Auto ISO, you can set a fixed ISO speed.

^{*4:} Settable only when Auto ISO is set.

^{*5:} Works only before you start shooting a movie.

Menu Settings

Viewfinder Shooting and Live View Shooting

: Shooting 1 (Red)

Page

	RAW / M RAW / S RAW L / L / M1 / M1 / M2 / M2 / S1 / S1 / S2 / S3					
Image quality						
Image review time	Off / 2 sec. / 4 sec. / 8 sec. / Hold	70				
Веер	Enable / Disable	69				
Release shutter without card	Enable / Disable	44				
Lens aberration	Peripheral illumination: Enable / Disable	188				
correction	Chromatic aberration: Enable / Disable	100				
External Speedlite control	Flash firing / E-TTL II metering / Flash sync. speed in Av mode / Flash function settings / Flash C.Fn settings / Clear settings	247				



- Shaded menu options are not displayed in the < mode.</p>
 - What is displayed under [♠1: Image quality] depends on the [Record func.] (p.146) setting under [1: Record func+card/folder sel.]. If [Rec. separately] is set, set the image quality for each card.
 - With movie shooting, certain menu items are not displayed. Also, the [6] tab will not appear.

: Shooting 2 (Red)

Page

Exposure compensation/ AEB setting*	1/3- and 1/2-stop increments, ±5 stops (AEB ±3 stops)	214 215
ISO speed settings	ISO speed / ISO speed range / Auto ISO range / Minimum shutter speed	158
Auto Lighting Optimizer	Disable / Low / Standard / High Disabled in M or B modes	182
White balance	础 (Ambience priority) / www (White priority) / */ ★/ ★/*/*/ ↓ (Approx. 2500 - 10000)	174
Custom White Balance	Manual setting of white balance	176
White Balance Shift/ Bracketing	White balance correction: B/A/M/G bias, 9 levels each White balance bracketing: B/A and M/G bias, single-level increments, ±3 levels	179
Color space	sRGB / Adobe RGB	193

^{*} During movie shooting, [Expo.comp./AEB] will be [Exposure comp.].

: Shooting 3 (Red)

Picture Style	조심 Auto / 조정 Standard / 조각 Portrait / 조립 Landscape / 조래 Fine Detail / 조돼 Neutral / 조각 Faithful / 조돼 Monochrome / 조립 User Def. 1-3	164
Long exposure noise reduction	Disable / Auto / Enable	185
High ISO speed noise reduction	Disable / Low / Standard / High / Multi Shot Noise Reduction	183
Highlight tone priority	Disable / Enable	187
Dust Delete Data	Obtain data to be used by EOS software to delete dust spots	375
Multiple exposure	Multiple exposure / Multiple exposure control / Number of exposures / Save source images / Continue multiple exposure	226
HDR Mode	Adjust dynamic range / Effect / Continuous HDR / Auto Image Align / Save source images	221

: Shooting 4* (Red)

Page

Interval timer	Disable / Enable (Interval / Number of shots)	239
Bulb timer	Disable / Enable (Exposure time)	219
Anti-flicker shooting	Disable / Enable	191
Mirror lockup	Disable / Press twice to shoot / Shoot 1/8 sec after press / Shoot 1/4 sec after press / Shoot 1/2 sec after press / Shoot 1 sec. after press / Shoot 2 sec. after press	234
Crop/aspect ratio	Full-frame / 1.3x (crop) / 1.6x (crop) / 1:1 (aspect ratio) / 4:3 (aspect ratio) / 16:9 (aspect ratio)	154

^{*} In the <♠ > mode, these menu options are displayed under [♠2].

: Shooting 5* (Red)

• ,	,	
Live View shooting	Enable / Disable	257
AF method	+Tracking / FlexiZone - Single	268
Continuous AF	Disable / Enable	264
Grid display	Off / 3x3 ‡ / 6x4 ## / 3x3+diag 💥	265
Exposure simulation	Enable / During 🚱 / Disable	265

^{*} In the < 🖈 > mode, these menu options are displayed under [🗖 3].

: Shooting 6 (Red)

Silent LV shooting	Mode 1 / Mode 2 / Disable	266
Metering timer	4 sec. / 8 sec. / 16 sec. / 30 sec. / 1 min. / 10 min. / 30 min.	267

AF: AF1 (Purple)

Page

Case 1	Versatile multi purpose setting	110
Case 2	Continue to track the subjects, ignoring possible obstacles	110
Case 3	Instantly focus on subjects suddenly entering AF points	111
Case 4	For subjects that accelerate or decelerate quickly	111
Case 5	For erratic subjects moving quickly in any direction	112
Case 6	For subjects that change speed and move erratically	113

AF: AF2 (Purple)

Al Servo 1st image priority	Release priority / Equal priority / Focus priority	118
Al Servo 2nd image priority	Shooting speed priority / Equal priority / Focus priority	119

AF: AF3 (Purple)

Lens electronic MF	Enable after One-Shot AF / Disable after One-Shot AF / Disable in AF mode	120
AF-assist beam firing	Enable / Disable / IR AF assist beam only	121
One-Shot AF release priority	Release priority / Focus priority	122

AF: AF4 (Purple)

Page

Lens drive when AF impossible	Continue focus search / Stop focus search	
Selectable AF point	61 points / Only cross-type AF points / 15 points / 9 points	
Select AF area selection mode	Manual selection: Spot AF / Manual selection: 1 point AF / Expand AF area: "d"/ Expand AF area: Surround / Manual selection: Zone AF / Auto selection: 61 point AF	
AF area selection method	→ M-Fn button / → Main Dial	126
Orientation linked AF point	Same for both vertical/horizontal / Separate AF points: Area+point / Separate AF points: Point only	
Initial AF point, (3) AI Servo AF	Initial () AF point selected / Manual 回 🗖 🖧 👯 AF point / Auto	128
Auto AF point selection: EOS iTR AF	Enable / Disable	129

AF: AF5 (Purple)

Manual AF point selection pattern	Stops at AF area edges / Continuous	130	
AF point display during focus	Selected (constant) / All (constant) / Selected (pre-AF, focused) / Selected (focused) / Disable display		
	Auto / Enable / Disable		
VF display illumination	AF point during AI Servo AF: Non illuminated / Illuminated	132	
AF Microadjustment	Disable / All by same amount / Adjust by lens	134	

▶: Playback 1 (Blue)

Page

Protect images	Protect images	334
Rotate image	Rotate images	333
Erase images	Erase images	358
Print order	Specify images to be printed (DPOF)	392
Photobook Set-up	Specify images for a photobook	397
Image copy	Copy images between cards	354
RAW image processing	Process RAW images	364

▶: Playback 2 (Blue)

Cropping	Partially crop JPEG images	371
Resize	Downsize JPEG image's pixel count	369
Rating	[OFF] / [→] / [→] / [→] / [★]	337
Slide show	Set playback description / Display time / Repeat, and start auto playback	348
Image transfer	Image selection/transfer / RAW+JPEG transfer	395
lmage jump w/ ੴ	1 image / 10 images / 100 images / Date / Folder / Movies / Stills / Protect / Rating	328

▶: Playback 3 (Blue)

_ ,		
Highlight alert	Disable / Enable	325
AF point display	Disable / Enable	325
Playback grid	Off / 3x3 ‡ / 6x4 ‡ / 3x3+diag 🔀	321
Histogram display	Brightness / RGB	326
Movie playback count*	Rec time / Time code	304
Magnification (approx.)	1x (no magnification) / 2x (magnify from center) / 4x (magnify from center) / 8x (magnify from center) / 16x (magnify from center) / Actual size (from selected point) / Same as last magnification (from center)	331
Control over HDMI	Disable / Enable	352

^{*} The setting is linked to the [Time code]'s [Movie play count] under the [△5 (Movie)] tab.

∀: Set-up 1 (Yellow)

Page

Record function+card/	Recording function: Standard / Auto switch card / Record separately / Record to multiple	146
folder selection	Record/playback / Playback: 1 / 2	148
	Folder: Selecting and creating a folder	194
File numbering	Continuous / Auto reset / Manual reset	
File name	Preset code / User setting 1 / User setting 2	
Auto rotate	On 🗖 및 / On 및 / Off	362
Format card	Erase data on the card by formatting	67
Eye-Fi settings	Displayed when a commercially-available Eye-Fi card is inserted	451

∵: Set-up 2 (Yellow)

Auto power off	1 min. / 2 min. / 4 min. / 8 min. / 15 min. / 30 min. / Disable	
LCD brightness	Auto: Adjustable to one of three brightness levels	361
LOD brightness	Manual: Adjustable to one of seven brightness levels	301
Date/Time/Zone	Date (year, month, day) / Time (hr., min., sec.) / Daylight saving time / Time zone	49
Language 👼	Select the interface language	
Viewfinder display	Electronic level: Hide / Show	75
	Grid display: Hide / Show	74
	Show/hide in viewfinder: Battery / White balance / Drive mode / AF operation / Metering mode / Image quality / Flicker detection	77
GPS device settings	Settable when the GPS Receiver GP-E2 (sold separately) is attached	-

♥: Set-up 3 (Yellow)

D	. ~	_
Γc	ıų	ᆫ

Video system	For NTSC / For PAL		
Battery information	Power source / Remaining capacity / Shutter count / Recharge performance / Battery registration / Serial number / Battery history		
	Auto cleaning .t்_→ : Enable / Disable	374	
Sensor cleaning	Clean now .t□	3/4	
	Clean manually	377	
(NEO) button display options	Displays camera settings / Electronic level / Quick Control screen / Custom Quick Control screen	442	
Custom Quick Control	Customize the functions and layout for Quick Control screen		
RATE button function	Rating / Protect		
Communication settings	Displayed when Wireless File Transmitter WFT-E7 (Ver. 2, sold separately) is attached.	-	



- When using GPS device or a Wireless File Transmitter, be sure to check the countries and areas of use, and use the device in accordance with the laws and regulations of the country or region.
 - Note that when connecting GPS Receiver GP-E2 (sold separately) with a cable, preparations as below are necessary.
 - Update the GP-E2's firmware to Version 2.0.0 or later. (Using the cable for connection is not possible with the firmware version earlier than Version 2.0.0.)
 - Interface Cable IFC-40AB II or IFC-150AB II (both sold separately) must be used

When using the GP-E2 attached to the hot shoe, preparations as above are not necessary. For how to update the GP-E2's firmware, refer to the Canon Web site

♥: Set-up 4 (Yellow)

Page

Custom shooting mode (C1-C3)	Register current camera settings to the Mode Dial's (1), (2), and (3) positions	437
Clear all camera settings	Resets the camera to the default settings	70
Copyright information	Display copyright information / Enter author's name / Enter copyright details / Delete copyright information	201
Certification Logo Display	Some of the camera's certification logos are displayed	441
firmware ver.	Select to update the firmware of the camera, lens, Speedlite, or Wireless File Transmitter	-

. . . : Custom Functions (Orange)

C.Fn1: Exposure	Customize camera functions as desired	402
C.Fn2: Exposure		408
C.Fn3: Others		409
C.Fn4: Clear	Clear all Custom Function settings	401

★: My Menu (Green)

Add My Menu tab	Add My Menu tabs 1-5	432
Delete all My Menu tabs	Delete all My Menu tabs	435
Delete all items	Delete all items under My Menu tabs 1-5	435
Menu display	Normal display / Display from My Menu tab / Display only My Menu tab	436

Movie Shooting

: Shooting 4*1 (Movie) (Red)

Page

Movie Servo AF	Enable / Disable		
AF method	∵+Tracking / FlexiZone - Single		
Grid display	Off / 3x3 # / 6x4 ## / 3x3+diag #		
Movie recording size	1920x1080 / 1280x720 / 640x480 NTSC: 59.94p / 29.97p / 23.98p PAL: 50.00p / 25.00p ALL-I (For editing) / IPB (Standard)	297	
Sound recording* ²	Sound recording: Auto / Manual / Disable Recording level Wind filter: Disable / Enable Attenuator: Disable / Enable		

^{*1:} In the (a +) mode, these menu options are displayed under [2].

^{*2:} In the < (A) > mode, [Sound recording] settings will be [On] [Off].

: Shooting 5*1 (Movie) (Red)

Page

Silent LV shooting	Mode 1 / Mode 2 / Disable		
Metering timer	4 sec. / 8 sec. / 16 sec. / 30 sec. / 1 min. / 10 min. / 30 min.		
Time code	Count up / Start time setting / Movie recording count / Movie play count*2 / Drop frame*3		
Silent Control	Enable 🗘 / Disable 🗘	302	
• button function	©AF/ ♠ / ◉ / ♠ / ⊛AF/ ॑── / ◉ / ႛ──	316	
Time-lapse movie Disable / Enable (Interval / No. of shots / Time required / Playback time/ Card- time left)		306	

^{*1:} In the < (A) > mode, these menu options are displayed under [13].

^{*2:} The setting is linked to [Movie play count] under the [3] tab.

^{*3:} Displayed when 59.94 (59.94 fps) or 29.97 (29.97 fps) is set.

Troubleshooting Guide

If a problem occurs with the camera, first consult this Troubleshooting Guide. If this Troubleshooting Guide does not resolve the problem, contact your dealer or nearest Canon Service Center.

Power-Related Problems

The battery does not recharge.

- If the battery's remaining capacity is 94% or higher, the battery will not be recharged (p.446).
- Do not use any battery other than genuine Battery Pack LP-E6N/LP-E6.

The charger's lamp blinks at high speed.

If (1) the battery charger or battery has a problem or (2) communication with the battery failed (with a non-Canon battery pack), the protection circuit will stop charging, and the charge lamp will blink in orange at a high speed. In the case of (1), unplug the charger's power plug from the power outlet. Detach and reattach the battery to the charger. Wait a few minutes, then reconnect the power plug to the power outlet. If the problem persists, contact your dealer or nearest Canon Service Center.

The charger's lamp does not blink.

If the internal temperature of the battery attached to the charger is high, the charger will not charge the battery for safety reasons (lamp off). During charging, if the battery's temperature becomes high for any reason, charging will stop automatically (lamp blinks). When the battery temperature goes down, charging will resume automatically.

The camera does not operate even when the power switch is set to < ON >.

- Make sure the battery compartment cover is closed (p.42).
- Make sure the battery is installed properly in the camera (p.42).
- Recharge the battery (p.40).
- Make sure the card slot cover is closed (p.43).

The access lamp still lights or blinks even when the power switch is <OFF>.

 If the power is turned off while an image is being recorded to the card, the access lamp will remain on or continue to blink for a few seconds. When the image recording is completed, the power will turn off automatically.

[Does this battery/do these batteries display the Canon logo?] is displayed.

- Do not use any battery other than a genuine Battery Pack LP-E6N/LP-E6.
- Remove and install the battery again (p.42).
- If the battery contacts are dirty, use a soft cloth to clean them.

The battery becomes exhausted quickly.

- Use a fully-charged battery (p.40).
- The battery performance may have degraded. See [♥3: Battery info.] to check the battery's recharge performance level (p.446). If the battery performance is poor, replace the battery with a new one.
- The number of possible shots will decrease with any of the following operations:
 - Pressing the shutter button halfway for a prolonged period.
 - · Activating the AF frequently without taking a picture.
 - · Using the lens's Image Stabilizer.
 - · Using the LCD monitor frequently.
 - Continuing Live View shooting or movie shooting for a prolonged period.
 - · The Eye-Fi card's communication function is operating.

The camera turns off by itself.

- Auto power off is in effect. If you do not want auto power off to take effect, set [\(\frac{4}{2}\): Auto power off] to [Disable] (p.69).
- Even if [Y2: Auto power off] is set to [Disable], the LCD monitor will still turn off after the camera is left idle for 30 min. (The camera's power does not turn off.)

Shooting-Related Problems

The lens cannot be attached.

The camera cannot be used with EF-S or EF-M lenses (p.52).

The viewfinder is dark.

Install a recharged battery in the camera (p.40).

No images can be shot or recorded.

- Make sure the card is properly inserted (p.43).
- If you are using an SD card, slide the card's write-protect switch to the Write/Erase setting (p.43).
- If the card is full, replace the card or delete unnecessary images to make space (p.43, 328).
- If you try to focus in the One-Shot AF mode and the focus indicator
 in the viewfinder blinks, a picture cannot be taken. Press the shutter button halfway again to refocus automatically, or focus manually (p.55, 141).

The card cannot be used.

If a card error message is displayed, see page 46 or 487.

I cannot lock the focus and recompose the shot.

 Set the AF operation to One-Shot AF (p.87). Focus lock is not possible in the AI Servo AF, or when servo takes effect in AI Focus AF (p.83).

I have to press the shutter button twice completely to take a picture.

If [14: Mirror lockup] is set to [Press twice to shoot], set it to [Disable].

The image is out of focus or blurred.

- Set the lens's focus mode switch to <AF> (p.52).
- Press the shutter button gently to prevent camera shake (p.54-55).
- If the lens has an Image Stabilizer, set the IS switch to < ON >.
- In low light, the shutter speed may become slow. Use a faster shutter speed (p.206), set a higher ISO speed (p.158), use flash (p.244), or use a tripod.
- See "Minimizing Blurred Photos" on page 235.

There are fewer AF points.

 Depending on the attached lens, the number of usable AF points and patterns will differ. The lenses are categorized into nine groups from A to I. Check which group your lens belongs to. Using a lens in Groups F to H will have fewer usable AF points (p.103-104).

The AF point is blinking or two AF points are displayed.

- Regarding lighting up or blinking of the AF points when you press the
 button, see page 94.
- The AF point at the registered area is blinking (p.94, 418).
- The manually-selected AF point (or zone) and the registered AF point are displayed (p.93, 418).

The AF points do not light up in red.

- The AF points light up in red when focus is achieved in low-light conditions.
- In the <P>, <Tv>, <Av>, <M>, and modes, you can set whether to have the AF points light in red when focus is achieved (p.132).

The continuous shooting speed is slow.

- The continuous shooting speed may become slower depending on the shutter speed, aperture, subject conditions, brightness, lens, flash use, temperature, battery type, remaining battery level, etc. (p.143).
- In Al Servo AF operation, the continuous shooting speed may become slower depending on the subject conditions and lens used (p.143).
- If you use Battery Pack LP-E6 and shoot in low temperatures (battery temperature is low), the high-speed continuous shooting speed may become slower (p.143).
- The continuous shooting speed may become slower if the remaining battery level is low or if you shoot under low-light conditions (p.143).
- If you use Battery Grip BG-E11 (sold separately) with AA/R6 batteries, the maximum continuous shooting speed will be approx. 3.0 fps for high-speed continuous shooting.
- If you set [

 4: Anti-flicker shoot.] to [Enable] and shoot under a flickering light source, the continuous shooting speed may decrease slightly, the shooting interval may become irregular, or the release time lag may become longer (p.191).

The maximum burst during continuous shooting is lower.

 If you shoot something that has fine detail such as a field of grass, the file size will be larger, and the actual maximum burst may be lower than the number mentioned on page 151.

I cannot shoot in the 4:3 or 16:9 aspect ratio.

 During viewfinder shooting, you cannot shoot in either the 4:3 or the 16:9 aspect ratio even when the aspect ratio is set. During Live View shooting, you can shoot images in the 4:3 and 16:9 aspect ratios (p.154).

ISO 100 cannot be set. ISO speed expansion cannot be selected.

If [

3: Highlight tone priority] is set to [Enable], the settable ISO speed range will be ISO 200 - ISO 6400. Even if you expand the settable ISO speed range with [ISO speed range], you cannot select the L (equivalent to ISO 50) or H (equivalent to ISO 12800). When [

3: Highlight tone priority] is set to [Disable], ISO 100/125/160, L, or H can be set (p.187).

Even if I set a decreased exposure compensation, the image comes out bright.

I cannot set the exposure compensation while both manual exposure and Auto ISO are set.

- See page 211 to set the exposure compensation.
- Even if an exposure compensation is performed, it will not be applied for flash photography.

Multi Shot Noise Reduction cannot be set.

 If the image-recording quality is set to RAW or RAW+JPEG, [Multi Shot Noise Reduction] cannot be set.

The Live View image or movie shooting image is not displayed during multiple-exposure shooting.

 If [On:ContShtng] is set, Live View display, image review after image capture, or image playback is not possible during shooting (p.226).

Live View shooting ends when multiple exposure shooting is performed.

 If you perform Live View shooting with [On:ContShtng], Live View function will end automatically when the first exposure is taken. Take the second and subsequent exposures while looking through the viewfinder.

The multiple-exposure image is shot in AW quality.

 When the image-recording quality is set to M MAW or S MAW, the multiple-exposure image will be recorded in MAW quality (p.233).

When I use the < Av > mode with flash, the shutter speed becomes slow.

• If you shoot at night when the background is dark, the shutter speed automatically becomes slow (slow-sync shooting) so that both the subject and background are properly exposed. To prevent a slow shutter speed, under [☎1: External Speedlite control], set [Flash sync. speed in Av mode] to [1/200-1/60sec. auto] or [1/200 sec. (fixed)] (p.248).

The flash does not fire.

- Make sure the flash (or PC sync cord) is securely attached to the camera.
- If you use a non-Canon flash unit with Live View shooting, set [6: Silent LV shoot.] to [Disable] (p.266).

The flash always fires at full output.

- If you use a flash unit other than an EX-series Speedlite, the flash will always be fired at full output (p.245).
- When the flash Custom Function setting for [Flash metering mode] is set to [TTL flash metering] (autoflash), the flash will always be fired at full output (p.253).

Flash exposure compensation cannot be set.

 If flash exposure compensation is already set with the Speedlite, flash exposure compensation cannot be set with the camera. When the external Speedlite's flash exposure compensation is canceled (set to 0), flash exposure compensation can be set with the camera.

High-speed sync cannot be set in the < Av > mode.

 Under [☐1: External Speedlite control], set [Flash sync. speed in Av model to [Auto] (p.248).

The shutter makes two shooting sounds during Live View shooting.

 If you use flash, the shutter will make two sounds each time you shoot (p.257).

During Live View or movie shooting, a white I or red I icon is displayed.

It indicates that the camera's internal temperature is high. If the white <
■> icon is displayed, the still photo's image quality may deteriorate. If the red <
>=> icon is displayed, it indicates that the Live View or movie shooting will soon stop automatically (p.277, 317).

Movie shooting stops by itself.

- If the card's writing speed is slow, movie shooting may stop automatically. For cards that can record movies, see page 5. To find out the card's writing speed, refer to the card manufacturer's Web site.
- If the movie shooting time reaches 29 min. 59 sec., the movie shooting will stop automatically.

The ISO speed cannot be set for movie shooting.

If the shooting mode is (a h >, < P >, < Tv >, < Av >, or < B >, the ISO speed will be set automatically. In the < M > mode, you can freely set the ISO speed (p.287).

The manually set ISO speed changes when switching to movie shooting.

 If you shoot a movie with manual exposure set to L (equivalent to ISO 50), the ISO speed setting will switch to ISO 100. Even if you switch back to still photo shooting, the ISO speed will not revert to L.

The exposure changes during movie shooting.

- If you change the shutter speed or aperture during movie shooting, the changes in the exposure may be recorded.
- Zooming the lens during movie shooting can cause changes in the exposure regardless of whether the lens's maximum aperture changes or not. The changes in the exposure may be recorded as a result.

The image flickers or horizontal stripes appear during movie shooting.

Flickering, horizontal stripes (noise), or irregular exposures can be caused by fluorescent lighting, LED lighting, or other light sources during movie shooting. Also, changes in the exposure (brightness) or color tone may be recorded. In the < M> or < Tv> mode, a slow shutter speed may reduce the problem. The problem may be more noticeable in time-lapse movie shooting.

The subject looks distorted during movie shooting.

 If you move the camera to the left or right (panning) or shoot a moving subject, the image may look distorted. The problem may be more noticeable in time-lapse movie shooting.

When I shoot still photos during movie shooting, the movie shooting stops.

- To shoot still photos during movie shooting, using a CF card capable of UDMA transfer or a UHS-I SD card is recommended.
- Setting a lower image quality for still photos or shooting fewer continuous still photos may resolve the problem.

Time code is off.

 Shooting still photos during movie shooting will cause a discrepancy between the actual time and time code. When you want to edit a movie using time code, it is recommended not to shoot still photos during movie shooting.

Operation Problems

I cannot change the setting with the <<a>>, <<a>>, <<<>>>.

- Set the <LOCK►> switch to the left (lock release, p.59).
- Check the [. . 3: Multi function lock] setting (p.410).

A camera button or dial does not work as expected.

• Check the [....3: Custom Controls] setting (p.413).

Display Problems

The menu screen shows fewer tabs and options.

- In the < ∆̄ > mode, only certain menu tabs and options are displayed.
 Set the shooting mode to < P>, < Ty>, < Ay>, < M> or < B> (p.64).
- Under the [★] tab, [Menu display] is set to [Display only My Menu tab] (p.436).

The file name's first character is an underscore (" ").

 Set the color space to sRGB. If Adobe RGB is set, the first character will be an underscore (p.193).

The fourth character in the file name changes.

 With [\(\frac{\psi}{1}\): File name], select the camera's unique file name or the file name registered under User setting 1 (p.196).

The file numbering does not start from 0001.

 If the card already contains recorded images, the image number may not start from 0001 (p.199).

The shooting date and time displayed is incorrect.

- Check that the correct date and time are set (p.49).
- Check the time zone and daylight saving time (p.49-50).

The date and time are not in the picture.

 The shooting date and time do not appear in the picture. The date and time are recorded in the image data as shooting information. When printing, you can imprint the date and time in the picture, using the date and time recorded in the shooting information (p.385, 389).

[###] is displayed.

 If the number of images recorded on the card exceeds the number the camera can display, [###] will be displayed (p.339).

In the viewfinder, the AF point display speed is slow.

 In low temperatures, the display speed of the AF points may become slower due to the AF point display device's (liquid crystal) characteristics. The display speed will return to normal at room temperature.

The LCD monitor does not display a clear image.

- If the LCD monitor is dirty, use a soft cloth to clean it.
- In low or high temperatures, the LCD monitor display may seem slow or may look black. It will return to normal at room temperature.

[Eye-Fi settings] does not appear.

 [Eye-Fi settings] will appear only when an Eye-Fi card is inserted in the camera. If the Eye-Fi card has a write-protect switch set to the LOCK position, you will not be able to check the card's connection status or disable Eye-Fi transmission (p.451).

Playback Problems

Part of the image blinks in black.

[►3: Highlight alert] is set to [Enable] (p.325).

A red box is displayed on the image.

[►3: AF point disp.] is set to [Enable] (p.325).

The image cannot be erased.

If the image is protected, it cannot be erased (p.334).

The movie cannot be played back.

Movies edited with a computer cannot be played back with the camera.

Camera operation noise can be heard when the movie is played back.

 If you operate the camera's dials or lens during movie shooting, the operation noise will also be recorded. Using an external microphone (commercially available) is recommended (p.301).

The movie has still moments.

 During autoexposure movie shooting, if there is a drastic change in the exposure level, the recording will stop momentarily until the brightness stabilizes. In such cases, shoot in the <M> mode (p.286).

No picture on the TV set.

- Check if the [\$\psi\$3: Video system] is correctly set to [For NTSC] or [For PAL] (depending on the video system of your TV set).
- Check that the HDMI cable's plug is inserted all the way in (p.351).

There are multiple movie files for a single movie shoot.

 If the movie file size reaches 4 GB, another movie file will be created automatically (p.299).

My card reader does not recognize the card.

 Depending on the card reader and computer OS used, large-capacity CF cards or SDXC cards may not be correctly recognized. In such a case, connect your camera to the computer with the interface cable, then transfer the images to your computer, using EOS Utility (EOS software, p.520).

I cannot process the RAW image.

 M MAW and S MAW images cannot be processed with the camera. Use the EOS software, Digital Photo Professional to process the image (p.520).

I cannot resize or crop the image.

 JPEG \$3, RAW, M RAW, and \$ RAW images cannot be resized or cropped with the camera (p.369, 371).

Sensor Cleaning Problems

The shutter makes a noise during sensor cleaning.

If you selected [Clean now the picture is taken (p.374).

Automatic sensor cleaning does not work.

If you repeatedly turn the power switch < ON > / < OFF > at a short interval, the < ⁻— > icon may not be displayed (p.47).

Printing-Related Problems

There are fewer printing effects than listed in the instruction manual.

Contents displayed on the screen vary depending on the printer. This
instruction manual lists all the printing effects available (p.384).

Computer Connection Problems

Communication between the connected camera and computer does not work.

When using EOS Utility (EOS software), set [5: Time-lapse movie] to [Disable] (p.306).

I cannot transfer images to a computer.

- Install the EOS software (EOS DIGITAL Solution Disk CD-ROM) on the computer (p.520).
- Check that EOS Utility's main window is displayed.

Error Codes

Error number



If there is a problem with the camera, an error message will appear. Follow the onscreen instructions.

Cause and countermeasures

Number	Error Message and Solution
01	Communications between the camera and lens is faulty. Clean the lens contacts. $% \left(\frac{1}{2}\right) =\frac{1}{2}\left(\frac{1}{2}$
01	→ Clean the electrical contacts on the camera and lens, use a Canon lens, or remove and install the battery again (p.25, 26, 42).
02	Card* cannot be accessed. Reinsert/change card* or format card* with camera.
02	→ Remove and insert the card again, replace the card, or format the card (p.43, 67).
	Cannot save images because card* is full. Replace card*.
04	→ Replace the card, erase unnecessary images, or format the card (p.43, 67, 358).
06	Sensor cleaning could not be performed. Turn the camera off and on again.
	→ Operate the power switch (p.47).
10, 20 30, 40 50, 60 70, 80 99	An error prevented shooting. Turn the camera off and on again or re-install the battery.
	→ Operate the power switch, remove and install the battery again, or use a Canon lens (p.42, 47).

^{*} If the error still persists, write down the error number and contact your nearest Canon Service Center.

Specifications

Type

Type: Digital, single-lens reflex, AF/AE camera Recording media: CF cards (Type I, UDMA 7 supported)

SD/SDHC*/SDXC* memory cards

* UHS-I cards compatible.

Approx. 36.0 x 24.0 mm Image sensor size:

Compatible lenses: Canon EF lenses * Excluding EF-S and EF-M lenses

(35mm-equivalent lens focal length is as indicated on

the lens)

Canon FF mount Lens mount:

Image Sensor

Type: CMOS sensor

Effective pixels: Approx. 50.6 megapixels

* Rounded off to the nearest 10,000th.

Aspect ratio: 3.2

Dust delete feature: Auto/Manual, Appending Dust Delete Data

Recording System

Recording format: Design rule for Camera File System (DCF) 2.0

Image type: JPEG, RAW (14-bit Canon original),

RAW+JPEG simultaneous recording possible

Pixels recorded L (Large) : Approx. 50.3 megapixels (8688 x 5792) M1 (Medium 1): Approx. 39.3 megapixels (7680 x 5120) (With full-frame):

M2 (Medium 2): Approx. 22.1 megapixels (5760 x 3840) S1 (Small 1) : Approx. 12.4 megapixels (4320 x 2880) S2 (Small 2) : Approx. 2.5 megapixels (1920 x 1280) S3 (Small 3) : Approx. 0.35 megapixels (720 x 480) RAW : Approx. 50.3 megapixels (8688 x 5792)

M-RAW : Approx. 28.0 megapixels (6480 x 4320) S-RAW : Approx. 12.4 megapixels (4320 x 2880) Crop/aspect ratio: Crop shooting and shooting with the set aspect ratio

possible.

Full-frame / Approx. 1.3x (crop) / Approx. 1.6x (crop) / 1:1 (aspect ratio) / 4:3 (aspect ratio) / 16:9 (aspect ratio) Recording function: Standard, Auto switch card, Record separately, Record

to multiple Possible

File name: Preset code / User setting 1 / User setting 2
File numbering: Continuous. Auto reset. Manual reset

• Image Processing During Shooting

Picture Style: Auto, Standard, Portrait, Landscape, Fine Detail,

Neutral, Faithful, Monochrome, User Defined 1 - 3 Auto (Ambience priority), Auto (White priority), Preset

(Daylight, Shade, Cloudy, Tungsten light, White fluorescent light, Flash), Custom, Color temperature setting (approx. 2500-10000 K), White balance correction, and White balance bracketing provided *Flash color temperature information transmission

possible

Noise reduction: Applicable to long exposures and high ISO speed shots

Automatic image Auto Lighting Optimizer provided

brightness correction:

Create/select a folder:

White balance:

Highlight tone priority: Provided

Lens aberration Peripheral illumination correction. Chromatic aberration

correction: correction

Viewfinder

Magnification:

Type: Eye-level pentaprism

Coverage: Vertical/Horizontal approx. 100% (with Eye point approx.

21 mm, full-frame)
Approx. 0.71x (-1 m⁻¹ with 50mm lens at infinity)

Eye point: Approx. 21mm (from eyepiece lens center at -1 m⁻¹)

Built-in dioptric Approx. -3.0 - +1.0 m⁻¹ (dpt)

adjustment:

Focusing screen: Fixed
Grid display: Provided
Electronic level: Provided

Function setting display: Battery, White balance, Drive mode, AF operation,

Metering mode, Image quality: JPEG/RAW, Flicker

detection, Warning symbol!

Mirror: Quick-return type

Depth-of-field preview: Provided

Autofocus

Type: TTL secondary image-registration, phase-difference

detection with the dedicated AF sensor 61 (Cross-type AF point; Max. 41 points) AF points:

> * Number of available AF points, cross-type points, and Dual cross-type points vary depending on the lens. * Dual cross-type focusing at f/2.8 with 5 AF points

vertically aligned at the center.

(AF group: When Group A lenses are used)

Focusing brightness EV -2 - 18 (Conditions: f/2.8-sensitive center AF point.

One-Shot AF, room temperature, ISO 100) range:

Focus operation: One-Shot AF, AI Servo AF, AI Focus AF, Manual focusing (MF)

AF area selection mode: Single-point Spot AF (manual selection), Single-point AF

(manual selection), AF point expansion (manual selection: up. down. left. and right). AF point expansion (manual selection: surround), Zone AF (manual selection of zone), 61-point automatic selection AF

Based on EOS iTR AF setting

selection conditions: (Enables AF incorporating human face/color information)

* iTR: Intelligent Tracking and Recognition

AF Configuration Tool: Case 1 - 6

Al Servo AF Tracking sensitivity, Acceleration/deceleration tracking,

characteristics: AF point auto switching

AF Custom Functions: 16 functions

AF fine adjustment: AF Microadjustment (All lenses by the same amount,

Adjust by lens)

Emitted by the EOS-dedicated external Speedlite AF-assist beam:

Exposure Control

AF point automatic

Metering mode: Approx. 150,000-pixel RGB+IR metering sensor and

> 252-zone TTL metering at max. aperture EOS iSA (Intelligent Subject Analysis) system Evaluative metering (linked to all AF points)

Partial metering (approx. 6.1% of viewfinder at center)

Spot metering (approx. 1.3% of viewfinder at center)

· Center-weighted average metering

Brightness metering range:

EV 0 - 20 (at room temperature, ISO 100)

Exposure control: Program AE (Scene Intelligent Auto, Program), Shutterpriority AE, Aperture-priority AE, Manual exposure, Bulb

exposure

ISO speed Scene Intelligent Auto: ISO 100 - ISO 3200 set

(Recommended automatically

exposure index): P, Tv, Av, M, B: Auto ISO, ISO 100 - ISO 6400 (in 1/3- or

whole-stop increments), or ISO expansion to L

(equivalent to ISO 50) or H (equivalent to ISO 12800)

ISO speed settings: ISO speed range, Auto ISO range, and Auto ISO

minimum shutter speed settable

Exposure Manual: ±5 stops in 1/3- or 1/2-stop increments

compensation: AEB: ±3 stops in 1/3- or 1/2-stop increments (can be

combined with manual exposure compensation)
Applied in One-Shot AF mode with evaluative

AE lock: Auto: Applied in One-Shot AF mode with evaluative metering when focus is achieved

Manual: By AE lock button

Anti-flicker: Possible

Interval timer: Shooting interval and shot count settable

Bulb timer: Bulb exposure time settable

HDR Shooting

Dynamic range adjustment: Auto, ±1, ±2, ±3

Effects: Natural, Art standard, Art vivid, Art bold, Art embossed

Auto image align: Provided

Multiple Exposures

Shooting method: Function/control priority, Continuous shooting priority

Number of multiple 2 to 9 exposures

exposures:

Multiple-exposure control: Additive, Average, Bright, Dark

Shutter

Type: Electronically-controlled, focal-plane shutter

Shutter speed: 1/8000 sec. to 30 sec. (total shutter speed range; available range varies by shooting mode), Bulb, X-sync at 1/200 sec.

Drive System

Drive mode: Single shooting, High-speed continuous shooting, Low-

speed continuous shooting, Silent single shooting, Silent continuous shooting, 10-sec. self-timer/remote control,

2-sec. self-timer/remote control

Continuous shooting

speed:

High-speed continuous shooting:

Max. approx. 5.0 shots/sec.

Low-speed continuous shooting: Max. approx. 3.0 shots/sec. Silent continuous shooting:

Max. approx. 3.0 shots/sec.

Max. burst JPEG Large/Fine: Approx. 31 shots (approx. 510 shots) (With full-frame):

RAW: Approx. 12 shots (approx. 14 shots)

RAW+JPEG Large/Fine: Approx. 12 shots (approx. 12 shots) * Figures are based on Canon's testing standards (ISO 100 and Standard Picture Style) and an 8 GB CF card. * Figures in parentheses apply to an UDMA mode 7, with

a CF card based on Canon's testing standards.

External Speedlite

Compatible Speedlites: **EX-series Speedlites** Flash metering: F-TTL II autoflash

Flash exposure ±3 stops in 1/3- or 1/2-stop increments

compensation:

FF lock: Provided PC terminal: Provided

Flash control: Flash function settings, Flash C.Fn settings

Live View Shooting

Contrast-detection AF system (Face+Tracking, Focus method:

FlexiZone-Single)

Manual focus (approx. 6x and 16x magnified view

possible for focus check)

Continuous AF: Provided

Focusing brightness range: EV 0 - 18 (at room temperature, ISO 100)

Metering mode: Evaluative metering (315 zones), Partial metering

(approx. 6.4% of Live View screen), Spot metering (approx. 2.8% of Live View screen), Center-weighted

average metering

Brightness metering EV 0 - 20 (at room temperature, ISO 100)

range:

Silent shooting: Provided (Mode 1 and 2)

Grid display: 3 types

Movie Shooting

Recording format: MOV

Movie: MPEG-4 AVC / H.264 Variable (average) bit rate

Audio: Linear PCM

Recording size and Full HD (1920x1080): 29.97p/25.00p/23.98p

frame rate: HD (1280x720) : 59.94p/50.00p VGA (640x480) : 29.97p/25.00p

Compression method: ALL-I (For editing/I-only), IPB (Standard) File size: Full HD (29.97p/25.00p/23.98p)/ALL-I

: Approx. 654 MB/min.

Full HD (29.97p/25.00p/23.98p)/IPB (Standard)

: Approx. 225 MB/min. HD (59.94p/50.00p)/ALL-I : Approx. 583 MB/min. HD (59.94p/50.00p)/IPB (Standard) : Approx. 196 MB/min. VGA (29.97p/25.00p)/IPB (Standard): Approx. 78 MB/min.

Card requirements [CF card]

(Writing/reading speed): ALL-I: 30 MB/sec. or faster, IPB: 10 MB/sec. or faster

[SD card]

ALL-I: 20 MB/sec. or faster, IPB: 6 MB/sec. or faster

Focus method: Contrast-detection AF system (Face+Tracking,

FlexiZone-Single)

Manual focus (approx. 6x and 16x magnified view

possible for focus check)

Movie servo AF: Possible

Focusing brightness range: EV 0 - 18 (at room temperature, ISO 100)

Metering mode: Center-weighted average and Evaluative metering with

the image sensor

* Automatically set by the focus method.

Brightness metering range: EV 0 - 20 (at room temperature, ISO 100)

Exposure control: Autoexposure shooting (Program AE for movie shooting), Shutter-priority AE, Aperture-priority AE, Manual exposure

Exposure compensation: ±3 stops in 1/3-stop or 1/2-stop increments

ISO speed Scene Intelligent Auto, Tv: Automatically set within ISO

(Recommended 100 - ISO 6400

exposure index): P, Av, B: Automatically set within ISO 100 - ISO 6400,

expandable to H (equivalent to ISO 12800)

M: Auto ISO (automatically set within ISO 100 - ISO 6400), ISO 100 - ISO 6400 set manually (in 1/3- or whole-stop increments), expandable to H (equivalent to ISO 12800)

Time code: Supported

Drop frames: Compatible with 59.94p/29.97p

Sound recording: Built-in monaural microphone, external stereo

microphone terminal provided

Sound-recording level adjustable, wind filter provided,

attenuator provided

Grid display: 3 types

Time-lapse movie: Shooting interval and number of shots settable

Required shooting time period, playback length, and

remaining card capacity viewable

Still photo shooting: Possible

LCD Monitor

Type: TFT color, liquid-crystal monitor

Monitor size and dots: Wide 8.1 cm (3.2-in) (3:2) with approx. 1.04 million dots

Brightness adjustment: Auto (Dark, Standard, Bright), Manual (7 levels)

Electronic level: Provided Interface languages: 25

Help display: Possible

Playback

Highlight alert:

Image display format: Single-image display (without shooting information),

Single-image display (with simple information), Singleimage display (Shooting information displayed: Detailed information, Lens/histogram, White balance, Picture Style 1, Picture Style 2, Color space/noise reduction, Lens aberration correction), Index display (4/9/36/100

images), Two-image display Overexposed highlights blink

AF point display: Provided Grid display: 3 types

Magnified view: Approx. 1.5x-16x, initial magnification and position

settable

Image browsing method: Single image, Jump by 10 or 100 images, By shooting

date, By folder, By movies, By stills, By protected

images, By rating

Image rotation: Provided

Rating: Provided

Movie playback: Enabled (LCD monitor, HDMI)

Built-in speaker

Slide show: All images, By date, By folder, By movies, By stills, By

protected images, By rating

Image protection: Possible Copying images: Possible

Post-Processing of Images

In-camera RAW image Brightness correction, White balance, Picture Style, Auto Lighting Optimizer, High ISO speed noise reduction.

processina:

JPEG image-recording quality. Color space. Peripheral illumination correction, Distortion correction, Chromatic

aberration correction

Provided Resize: Cropping: Provided

Direct Printing

Compatible printers: PictBridge-compatible printers Printable images: JPEG and RAW images Print ordering: DPOF Version 1.1 compliant

Image Transfer

Transferrable files: Still photos (JPEG, RAW, RAW+JPEG images), Movies

Custom Functions

Custom Functions: 16 Custom Quick Control: Provided

My Menu: Up to 5 screens can be registered

Custom shooting mode: Register under Mode Dial's C1, C2, or C3

Copyright information: Text entry and inclusion enabled

Interface

DIGITAL terminal: SuperSpeed USB (USB 3.0)

> Computer communication, direct printing, Wireless File Transmitter WFT-E7 (Ver. 2), GPS Receiver GP-E2.

Connect Station CS100 connection

HDMI mini OUT terminal: Type C (Auto switching of resolution), CEC-compatible

External microphone IN 3.5 mm diameter stereo mini-iack

terminal:

Remote control terminal: For N3-type remote control units

Wireless remote control: Compatible with Remote Controller RC-6

Eye-Fi card: Supported Power

Battery: Battery Pack LP-E6N/LP-E6, quantity 1

* AC power can be supplied via AC Adapter Kit ACK-E6.

* With Battery Grip BG-E11 attached, AA/R6 batteries

can be used.

Battery information: Remaining capacity, Shutter count, Recharge

performance, and Battery registration possible

Number of possible With viewfinder shooting:

shots: Approx. 700 shots at room temperature (23°C/73°F),

approx. 660 shots at low temperatures (0°C/32°F)

With Live View shooting:

Approx. 220 shots at room temperature (23°C/73°F), approx. 210 shots at low temperatures (0°C/32°F)

* With a fully-charged Battery Pack LP-E6N.

Movie shooting time: Total approx. 1 hr. 30 min. at room temperature (23°C/

73°F)

Total approx. 1 hr. 25 min. at low temperatures (0°C/

32°F)

* With a fully-charged Battery Pack LP-E6N.

Dimensions and Weight

Dimensions (W x H x D): Approx. 152.0 x 116.4 x 76.4 mm / 5.98 x 4.58 x 3.01 in.

Weight: Approx. 930 g / 32.80 oz. (Based on CIPA Guidelines)

Approx. 845 g / 29.80 oz. (Body only)

Operation Environment

Working temperature 0°C - 40°C / 32°F - 104°F

range:

Working humidity: 85% or less

Battery Pack LP-E6N

Type: Rechargeable lithium-ion battery

Rated voltage: 7.2 V DC
Battery capacity: 1865 mAh

Working temperature 0°C - 40°C / 32°F - 104°F

range:

Working humidity: 85% or less

Dimensions (W x H x D): Approx. 38.4 x 21.0 x 56.8 mm / 1.51 x 0.83 x 2.24 in.

Weight: Approx. 80 g / 2.82 oz. (excluding protective cover)

Battery Charger LC-E6

Compatible battery: Battery Pack LP-E6N/LP-E6

Approx. 2 hr. 30 min. Recharging time: Rated input: 100 - 240 V AC (50/60 Hz)

8.4 V DC / 1.2 A Rated output:

5°C - 40°C / 41°F - 104°F Working temperature range:

Working humidity: 85% or less

Dimensions (W x H x D): Approx. 69.0 x 33.0 x 93.0 mm / 2.7 x 1.3 x 3.7

Approx. 130 g / 4.6 oz. Weight:

Battery Charger LC-E6E

Compatible battery: Battery Pack LP-E6N/LP-E6

Power cord length: Approx. 1 m / 3.3 ft. Recharging time: Approx. 2 hr. 30 min. Rated input: 100 - 240 V AC (50/60 Hz) Rated output: 8.4 V DC/1.2 A

5°C - 40°C / 41°F - 104°F Working temperature range:

Working humidity: 85% or less

Dimensions (W x H x D): Approx. 69.0 x 33.0 x 93.0 mm / 2.7 x 1.3 x 3.7

in

Weight: Approx. 125 g / 4.4 oz. (excluding power cord)

- All the specifications listed above are common between EOS 5DS and EOS 5DS R.
- All the data above is based on Canon's testing standards and CIPA (Camera & Imaging Products Association) testing standards and guidelines.
- Dimensions and weight listed above are based on CIPA Guidelines (except weight for camera body only).
- Product specifications and the exterior are subject to change without notice.
- If a problem occurs with a non-Canon lens attached to the camera, consult the respective lens manufacturer.

Trademarks

- Adobe is a trademark of Adobe Systems Incorporated.
- Microsoft and Windows are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.
- Macintosh and Mac OS are trademarks of Apple Inc., registered in the U.S. and other countries.
- CompactFlash is a trademark of SanDisk Corporation.
- SDXC logo is a trademark of SD-3C, LLC.
- HDMI, HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.
- All other trademarks are the property of their respective owners.

About MPEG-4 Licensing

"This product is licensed under AT&T patents for the MPEG-4 standard and may be used for encoding MPEG-4 compliant video and/or decoding MPEG-4 compliant video that was encoded only (1) for a personal and non-commercial purpose or (2) by a video provider licensed under the AT&T patents to provide MPEG-4 compliant video. No license is granted or implied for any other use for MPEG-4 standard."

* Notice displayed in English as required.

Use of Genuine Canon Accessories Is Recommended

This product is designed to achieve excellent performance when used with genuine Canon accessories.

Canon shall not be liable for any damage to this product and/or accidents such as fire, etc., caused by the malfunction of non-genuine Canon accessories (e.g., a leakage and/or explosion of a battery pack). Please note that this warranty does not apply to repairs arising out of the malfunction of non-genuine Canon accessories, although you may request such repairs on a chargeable hasis



Battery Pack LP-E6N/LP-E6 is dedicated to Canon products only. Using it with an incompatible battery charger or product may result in malfunction or accidents for which Canon cannot be held liable.

Digital Camera Model DS126521 / DS126611 Systems

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for class B digital devices, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The cable with the ferrite core provided with the digital camera must be used with this equipment in order to comply with Class B limits in Subpart B of Part 15 of the FCC rules.

Do not make any changes or modifications to the equipment unless otherwise specified in the manual. If such changes or modifications should be made, you could be required to stop operation of the equipment.

Canon U.S.A. Inc. One Canon Park, Melville, NY 11747, U.S.A. Tel No. 1-800-OK-CANON (1-800-652-2666)

CAN ICES-3 (B) / NMB-3 (B)



When connecting to and using a household power outlet, use only AC Adapter Kit ACK-E6 (rated input: 100-240 V AC 50/60 Hz, rated output: 8.0 V DC). Using anything else can cause fire, overheating, or electrical shock.



USA and Canada only:

The Lithium ion/polymer battery that powers the product is recyclable. Please call 1-800-8-BATTERY for information on how to recycle this battery.

For CA, USA only

Included lithium battery contains Perchlorate Material – special handling may apply. See www.dtsc.ca.gov/hazardouswaste/perchlorate/ for details.

CAUTION

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO LOCAL REGULATION.

MEMO		

MEMO			

MEMO			

MEMO		

MEMO		

MEMO		

MEMO			

MEMO		

MEMO		

MEMO		

MEMO		

МЕМО		

MEMO			

15

Viewing the CD-ROM Instruction Manuals / Downloading Images to Your Computer

This chapter explains how to view the Camera Instruction Manual CD-ROM on your computer, download images from the camera to your computer, gives an overview of the software in the EOS DIGITAL Solution Disk (CD-ROM), and explains how to install the software on your computer. It also explains how to view the Software Instruction Manuals.



Camera Instruction Manual



EOS DIGITAL Solution Disk (Software/Software Instruction Manuals)

Viewing the Camera Instruction Manual CD-ROM



The Camera Instruction Manual CD-ROM contains the following electronic manuals (PDF files):

- Camera Instruction Manual
 Explains all the camera functions and procedures, including basic content.
- Quick Reference Guide
 Simple and portable guide covering basic function settings, shooting instructions, and playback instructions.

Viewing the Camera Instruction Manual CD-ROM

To view the instruction manuals (PDF files), <u>Adobe Reader 6.0 or higher must be installed on your computer.</u> Adobe Reader can be downloaded free from the Internet. After installing Adobe Reader, follow the procedure below.

1 Insert the "CAMERA INSTRUCTION MANUAL" CD-ROM into your computer.



- Double-click the CD-ROM icon.
 - With Windows, double-click on the CD-ROM icon in [(My) Computer]. With Macintosh, double-click on the CD-ROM icon on the desktop.
 - The icon displayed will differ depending on your computer's operating system.



Double-click the START file.

- The screen shown in step 4 will appear.
 - The icon displayed will differ depending on your computer's operating system.
- Click your language.



5 Click the instruction manual you want to read.



► The instruction manual will be displayed.



- You can save the PDF file to your computer.
- To learn how to use Adobe Reader, refer to Adobe Reader's Help section.


Downloading Images to a Computer


You can use EOS software to download the images in the camera to your computer. There are two ways to do this.

Downloading by Connecting the Camera to the Computer



Install the software (p.521).





Use the provided interface cable to connect the camera to your computer.

- Use the interface cable provided with the camera.
- When connecting the cable to the camera, use the cable protector (p.36). Connect the cable to the digital terminal with the plug's <ss<->> icon facing the back of the camera.
- Connect the cord's plug to the computer's USB terminal.

Use EOS Utility to transfer the images.

 For details, refer to the EOS Utility Instruction Manual (p.522).



Use the provided interface cable or one from Canon (p.454). When connecting the interface cable, use the provided cable protector (p.36).

Downloading Images with a Card Reader

You can use a card reader to download images to your computer.



Install the software (p.521).



Insert the card into the card reader.

- Use Digital Photo Professional to download the images.
 - For details, refer to the Digital Photo Professional Instruction Manual (p.522).



When downloading images from the camera to your computer with a card reader without using EOS software, copy the DCIM folder on the card to your computer.

Software Overview



EOS DIGITAL Solution Disk

Various software for EOS DIGITAL cameras are contained on the EOS DIGITAL Solution Disk.

EOS Utility

With the camera connected to a computer, EOS Utility enables you to transfer still photos and movies shot with the camera to the computer. You can also use this software to set various camera settings and shoot remotely from the computer connected to the camera.

Digital Photo Professional

This software is recommended for users who shoot RAW images. You can view, edit, and print RAW and JPEG images.

* Some functions differ between the version to be installed on a 64-bit computer and that to be installed on a 32-bit computer.

Picture Style Editor

You can edit Picture Styles, and create and save original Picture Style files. This software is aimed at advanced users who are experienced in processing images.

Installing the Software



- Do not connect the camera to your computer before you install the software. The software will not be installed correctly.
 - If there is a previous version of the software already installed on your computer, follow the procedure below to install the latest version. (The previous version will be overwritten.)
- Insert the EOS DIGITAL Solution Disk into your computer.
 - For Macintosh, double-click to open the CD-ROM icon displayed on the desktop, then double-click on [setup].
- Click [Easy Installation] and follow the on-screen instructions to install.
- Click [Restart] and remove the CD-ROM after the computer restarts.
 - When the computer has restarted, the installation is complete.

Software Instruction Manual



Software Instruction Manuals are contained on the EOS DIGITAL Solution Disk. You can copy and view the software instruction manual (PDF files) as follows:

- Insert the EOS DIGITAL Solution Disk into your computer.
- Close the install screen.
 - When the EOS DIGITAL Solution Disk install screen appears, close the install screen
- 3 Open the CD-ROM.
- 4 Open the [Manual] folder.
- 5 Copy the [English] folder to your computer.
 - Instruction Manual PDFs with the names below are copied.

	WITIGOWS	Maciniosn
EOS Utility	EUx.xW_E_xx	EUx.xM_E_xx
Digital Photo Professional	DPPx.xW_E_xx	DPPx.xM_E_xx
Picture Style Editor	PSEx.xW_E_xx	PSEx.xM_E_xx

Mindowo

- 6 Double-click the copied PDF file.
 - Adobe Reader (most recent version recommended) must be installed on your computer.
 - Adobe Reader can be downloaded free from the Internet.

Index

Numerics
1:1 (aspect ratio) 154, 262 1.3x (crop) 154, 262 1.6x (crop) 154, 262 10- or 2-sec. self-timer 144 1280x720 (movie) 297 16:9 (aspect ratio) 154, 262 1920x1080 (movie) 297 4:3 (aspect ratio) 154, 262 61-point automatic selection AF 91, 97 640x480 (movie) 297
Α
(Scene Intelligent Auto) 80 AC Adapter Kit 450 Acceleration/ 115 Access lamp 45, 46 Accessories 3 Adjust all by same amount 134 Adjust by lens 136 Adobe RGB 193 AE lock 217 AEB (Auto Exposure Bracketing) 215, 403
AF

AF point registration		418
AF point selection		
Area AF frame		
Beeper		
Color information		
Cross-type focusing		
Customization		118
Direct AF point selection		
Dual cross-type focusing		99
f/8 AF limit		
Facial information		129
Manual focusing (MF) 1	141,	275
Out of focus54,	55,	474
Recomposing		
Spot AF point		
Subjects difficult for AF 1	140,	273
AI FOCUS (AI Focus AF)		88
AI SERVO (AI Servo AF)		88
Acceleration/		
deceleration tracking		115
AF Operation indicator	89,	132
AF point auto switching		116
AF points light up in red	89,	132
AF sensor		
Tracking sensitivity		114
ALL-I (For editing/I-only)		
Ambience priority (AWB)		175
Ambient light sensor	28,	361
Anti-flicker shooting		191
Aperture-priority AE2	208,	282
Area AF frame	91	, 97
Aspect ratio1	154,	262
Attenuator		
Auto (A)		165
Auto Lighting Optimizer	79,	182
Auto playback		348
Auto power off	47	, 69
Auto reset		
Auto rotate vertical images		

Auto switch card147 Autofocus → AF Automatic selection (AF)91, 97	Center-weighted average metering213 CF card → Cards
Av (Aperture-priority AE)208, 282	Charger 34, 40
В	Chromatic aberration correction 189
B (Bulb)	Cleaning (image sensor) 373 Clearing the camera settings 70 AI Servo AF characteristics 117 Camera function settings 70 Custom Controls (buttons & dials) 413 Custom Function settings 401 Custom Quick Control settings 428 Flash Custom Function settings 253 My menu 435 Clipped highlights 325 CLn 377 Color saturation 170
Bulb exposures	Color space 193 Color temperature 174, 178 Color tone 170
С	Continuous AF
(G) (Custom shooting) 437 Cable 3, 351, 380, 393, 454, 518 Protector 36 Camera 54 Clearing the camera settings 70 Holding the camera 54 Settings display 443 Cards 5, 25, 43, 67 Card reminder 44 Formatting 67 Low-level formatting 68 Troubleshooting 46, 68 Write protection 43	Continuous file numbering 199 Continuous shooting 142 Contrast 170, 182 Copyright information 201 Creative photo 164, 221, 226 ★ (Creative Zone) icon 8 Crop (when shooting) 154, 262 Cropping (for printing) 387 Cropping (images) 371 Cropping information 411 Cross-type focusing 99 Custom Controls 413 Custom functions 400, 402 Custom Quick Control 427 Custom shooting mode 437
Case109	Custom WB

D	Exposure maintained for
D+ 187 Date/time 49 Daylight saving time 50 DC Coupler 450 Default settings tables 70, 71, 72, 73	new aperture
Depth-of-field preview209 Detailed information (shooting)323	Eyepiece cover35, 236
Dials Main Dial	Faithful (三王)
E	Flash (Speedlite)243
Electronic level 75, 76 Erasing images 358 Err 29, 487 Error codes 487 Evaluative metering 212	Custom Functions
exFAT	Flash exposure
Exposure compensation with Auto ISO	compensation 244, 251 Flash mode 249 Flash sync contacts 26 Flash sync speed 245, 248
indicator30, 32, 258, 289	Flash sync. speed in Av mode248

Manual flash249	Household power	450
Shutter synchronization (1st/2nd curtain)251	1	
Focus indicator80	ICC profile	193
Focus lock83	Icon	8
Focus mode switch6, 52, 141, 275	Illumination (AF point)	132
Focusing → AF, Manual Focusing	Illumination (LCD panel)	59
(MF)	Image dust prevention	373
Focusing point	Image-recording quality 149	9, 297
(AF point)90, 93, 95, 99	Image review time	
Folder creation/selection194, 195	Images	
For editing (ALL-I)298	AF point display	325
Formatting (card initialization)67	Auto playback	348
Frame rate297	Auto reset	200
Free run303	Auto rotation	362
Full Auto mode80	Continuous numbering	199
Full High-Definition	Copying	354
(Full HD) (movie)279, 297	Downloading images	
Full-frame (3:2)154, 262	(to a computer)	518
Functions settable by	Erase	
shooting mode456	Highlight alert	
· ·	Histogram	
G	Image file numbering	
Grid74, 265, 315, 321	Index display	327
Н	Jump display	220
HD (movie)297	(image browsing) Magnification	
HDMI36, 342, 351	Manual reset	
HDMI CEC352	Manual rotation	
HDR221	Playback	
Help78	Protection	
High ISO speed noise reduction183	Rating	337
High-Definition (HD) movies297	Shooting information	322
Highlight alert325	Size151, 298	
Highlight tone priority187	Slide show	348
High-speed continuous shooting 142	Transfer	
Histogram	Two-image display	
(Brightness/RGB)258, 289, 326	Viewing on a TV set 342	,
Hot shoe26, 244	Index display	
	INFO button 60 258 289 320	442

Initial AF Point128	Exposure simulation
Interval timer239	Face+Tracking269
IPB (Standard)298	FlexiZone - Single
ISO speed158, 283, 287	Grid display
Automatic setting (Auto)160	Information display
Automatic setting range162	Manual focusing (MF)
ISO expansion161	Metering timer
Manual setting range161	Possible shots257
Minimum shutter speed163	Quick Control
Setting increments402	Silent shooting
iTR AF129	LOCK59, 410
J	Long exposure noise reduction 185
	Long exposures218
JPEG149, 151	Low-speed continuous shooting 142
Jump display328	M
L	M (Manual exposure) 210, 286
Landscape (31)165	Magnification 274, 275, 330
Language51	Initial position
Large	Main Dial56
(image-recording quality) 151, 369	Malfunction 471
LCD monitor24	Manual exposure210, 286
Brightness adjustment361	Manual focusing (MF) 141, 275
Electronic level75, 76	Manual reset200
Image playback319	Manual selection
Menu display64, 460	(AF point)
Shooting function settings60, 444	Maximum burst 151, 153
LCD panel29	Medium
Illumination59	(image-recording quality) 151, 369
Lens25, 52	Memory cards → Cards
Chromatic aberration	Menu64
correction189	My Menu
Focus mode	Setting procedure
switch6, 52, 141, 275	Settings
Group for usable AF points100	MENU icon8
Lock release53	Metering mode
Peripheral illumination	Metering mode
correction188	M-Fn
Live View shooting84, 255	Microadjustment
Crop/aspect ratio262	morodajustinont107

Microphone	280, 301	Time-lapse 306
Mirror lockup	234	Viewing on a TV set 342, 351
Mode Dial	33, 56	Wind filter 301
Monochrome ()	166	M-RAW
Monochrome images	384	(Medium RAW) 149, 151, 152
Movies	279	Multi function 92, 126, 415, 417
AE lock	284	Multi function lock 59, 410
AF method	295, 315	Multi Shot Noise Reduction 183
Aperture-priority AE	282	Multi-controller58
Attenuator		Multiple exposures 226
Autoexposure shooting	280	My Menu 432
Compression method	298	NI NI
Count up	303	N
Drop frame	305	Neutral (33N)165
Editing out first and last		Noise reduction
scenes	346	High ISO speed 183
Enjoying movies	342	Long exposures 185
File size	298, 299	Nomenclature26
Frame rate	297	Non-Canon flash units245
Free run	303	Normal
Grid	315	(image-recording quality) 149, 151
Information display	289	NTSC 297, 351, 467
Manual exposure shooting	ıg286	0
Metering timer	316	U
Microphone		ONE SHOT (One-Shot AF)87
Movie shooting button		One-Shot AF 87
Playback		One-touch image
Quick Control		quality setting 153, 424
Rec run		P
Recording size		•
Recording time		P (Program AE)204, 280
Recording/playback cour		PAL297, 351, 467
Servo AF		Partial metering 212
Shutter-priority AE		PC terminal 245
Silent control		Peripheral illumination correction . 188
Silent shooting		Personal white balance 177
Sound recording		Photobook set-up 397
Start time setting		PictBridge379
Stills		Picture Style 164, 168, 172
Time code	303	

Pixels	149, 151, 157	Recharging	40
Playback	319	Record function	146
Portrait (P)	165	Record separately (CF and SD).	147
Possible recording time	9	Record to multiple	147
(movie)	291, 298	Recording level	300
Possible shots	48, 151, 257	Reduced display	32
Power	47	Release shutter without card	44
Auto power off	47, 69	Remote control shooting	237
Battery information .	446	Remote switch	23
Battery level	48, 446	Resizing	369
Household power	450	Rotation (image)333	, 362
Possible shots	48, 151, 257	S	
Recharge performar	ıce446		
Recharging	40	Safety precautions	
Pressing completely		Safety shift	
Pressing halfway	55	Scene icons260	,
Printing		Scene Intelligent Auto	
Cropping		SD (VGA/movie)	
Direct printing	379	SD, SDHC, SDXC cards → Card	
Page layout	383	Second-curtain synchronization.	25′
Paper settings		Self-timer144	, 238
Photobook set-up		Sensitivity → ISO speed	
Print order (DPOF) .		Sensor cleaning	373
Printing effects		Sepia (Monochrome)	17
Tilt correction		Servo AF 83, 88	, 313
Program AE		Sharpness	170
Program shift		Shooting area	154
Protecting images	334	Shooting function settings 60	, 444
Q		Shooting information display	322
_		Shooting modes	33
Q (0.151, 0.551, 0.51) 0.4	000 000 040	Av (Aperture-priority AE)	208
(Quick Control)61		B (Bulb)	218
Quick Control Dial	57	(Custom shooting)	437
R		M (Manual exposure)	
Rating mark	337	P (Program AE)	
RAW		Tv (Shutter-priority AE)	
RAW image processing		(Scene Intelligent Auto)	
RAW+JPEG	•	Shooting orientation registration.	
Rec run		Shutter button	55
INCC IUII			

Shutter synchronization251 Shutter-priority AE206, 281	Tv (Shutter-priority AE) 206, 281 Two-image display 332
Silent shooting	U
Silent continuous shooting	Ultra DMA (UDMA)
Single-point Spot AF90, 95	V
Slide show 348 Small (image-recording quality) 151, 369 Software 520 Speaker 28, 344 Specifications 488 Spot AF point 31, 95 Spot metering 213 S-RAW (Small RAW) 149, 151, 152 sRGB 193	VGA (movie)
Standard (IPB)	W
Standard (□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□	Warning icon 409 White balance (WB) 174 Auto 175 Bracketing 180 Color temperature setting 178
Т	Correction
Temperature warning 277, 317 Threshold (Sharpness) 170 Time code 303 Time zone 49	Custom 176 Personal 177 White priority (AWB) 175 Wind filter 301
Time-lapse movie306	Z
Tone priority187 Toning effect (Monochrome)171 Touch pad58, 302	Zone AF 91, 96

MEMO	

Canon

The descriptions in this Instruction Manual are current as of March 2015. For information on the compatibility with any products introduced after this date, contact any Canon Service Center. For the latest version Instruction Manual, refer to the Canon Web site.