
CODE NO.	ITEM
1-20398-28	Canon FTb w/lens FD 50mm
	f/1.8 S.C.
1-20398-29	Canon FTb w/lens FD 50mm
	f/1.8 S.C. in case
1-20398-26	Canon FTb w/lens FD 50mm
	f/1.4 S.S.C.
1-20398-27	Canon FTb w/lens FD 50mm
	f/1.4 S.S.C. in case
1-20398-24	Canon FTb w/lens FD 55mm
	f/1.2 S.S.C.
1-20398-25	Canon FTb w/lens FD 55mm

1-20398-21

f/1.2 S.S.C. in case



1-20399-28	Canon FTb black w/lens FD
	50mm f/1.8 S.C.
1-20399-29	Canon FTb black w/lens FD
	50mm f/1.8 S.C. in case
1-20399-26	Canon FTb black w/lens FD
	50mm f/1.4 S.S.C.
1-20399-27	Canon FTb black w/lens FD
	50mm f/1.4 S.C. in case
1-20399-24	Canon FTb black w/lens FD
	55mm f/1.2 S.S.C.
1-20399-25	Canon FTb black w/lens FD
	55mm f/1.2 S.S.C. in case
1-20399-21	Canon ETh black body only

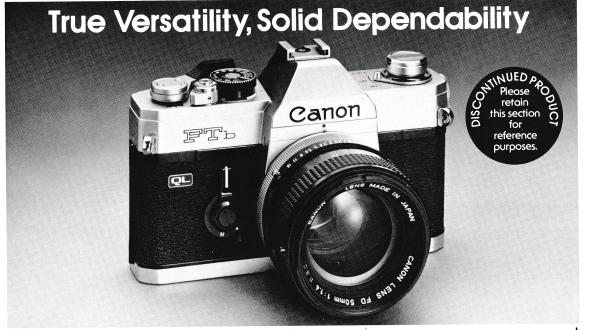

SPECIFICATIONS

- ■Type: 35mm single-lens reflex camera with focal plane shutter
- ■Picture Size: 24x36mm
- ■Standard Lenses: Canon FD 55mm f/1.2 S.S.C.; FD 50mm f/1.4 S.S.C.; FD 50mm f/1.8 S.C.
 ■Interchangeable Lenses: FD series for full aperture metering, FL
- series and R series for stopped down metering

 •Viewfinder: eye-level pentaprism; Angle Finders A2 and B,
- Magnifier S, Dioptric Adjustment lenses (-1.2 standard, +1.5, 0, -2.5 and -4 available) for eyesight correction can be attached.

 Focusing Screen: central microprism in matte-fresnel field with
- Focusing Screen: central microprism in matte-fresnel field with fine ground glass collar; beam-splitting condenser for meter operation
- ■Field-of-View: 94% vertical, 94% horizontal of picture area; 0.85x magnification with standard 50mm lens at infinity
- ■Finder Information: meter needle and aperture needle, shutter speed indicator, red signal appears when shutter speed is below coupling range of meter, stopped-down metering index mark and battery check mark; under and overexposure warning mark
- ■Mirror: shockless instant-return type; mirror can be fixed in upward position. Aperture is manually operated when mirror is in up position.
- ■Lens Mount: Canon breech-lock, FD, FL and R series lenses mountable
- ■Lens Functioning: FD lenses: full aperture metering coupled with automatic diaphragm; FL lenses: stopped-down metering, coupled with automatic diaphragm; R lenses: stopped-down metering with manually-operated diaphragm
- ■Shutter: focal-plane shutter with speeds from 1 to 1/1,000 sec. and B; X synchronization at 1/60 sec.; Shutter button can be locked.
- Self-Timer: built-in, activated with shutter button. Approximately 10 sec. time lag. Self-timer lever is also used as stopped-down metering lever and depth-of-field checking lever.
- ■Film Speed Range: ASA 25-2,000

- ■Exposure Meter: built-in, using CdS photocell. Coupled to ASA setting, shutter speed and aperture. Match-needle type full aperture metering mechanism. Central Area Metering System measures center 12% of picture area.
- ■Power Source: one 1.3V mercury battery (Mallory PX625 or Eveready EPX625); battery checker built-in
- ■Exposure Meter Coupling Range: with ASA 100 film, EV2.5 (f/1.2, 1/4 sec.) to EV18 (f/16, 1/1,000 sec.)
- ■Ultra-Low Illumination Metering: Metering possible for ASA 100 film between EV10 (f/22, 1/2 sec.) and EV-3.5 (f/1.2, 15 sec.) with use of optional FTb Booster accessory
- Flash Synchronization: FP and X synchronization, automatic time-lag adjusting type; synch. terminal on front of body with cover to prevent electric shock; two exclusive direct contacts on flash shoe
- ■Synchronizing Range: FP class: 1/1,000-1/125 sec.; Speedlite: 1/60 sec. or under; M, MF class: 1/30 sec. or under
- ■Canon Auto Tuning (CAT) System: aperture control by recharging power level signal and distance signal; proper aperture obtained by match-needle system through connection of Canon Speedlite 133D, Auto Ring A₂ or B₂; CAT used with these lenses: FD 50mm f/1.4 S.S.C., FD 50mm f/1.8 S.C., FD 35mm f/2 S.S.C. and FD 35mm f/3.5 S.C.
- ■Film Loading: QL mechanism is designed for quick loading of any standard 35mm film in cassettes.
- ■Winding Lever: single- stroke operation, 174°; ratchet winding possible
- •Film Rewinding: performed by rewind crank and button.
- ■Frame Counter: self-resetting type, activated by opening back cover
- ■Size: 144x93x43mm (5¹¹¹/₁₅′′x3¹¹¹/₁₅′′x1¹¹¹/₁₅′′) body only 144x93x90mm (5¹¹/₁₅′′x3¹¹/₁₅′′x3³/₁₅′′) body with FD 50mm f/1.4 lens
- ■Weight: 750g (1 lb. 10½ oz.) body only; 1055g (2 lbs. 5 oz.) with FD 50mm f/1.4 lens.

ACCESSORIES

VIEWFINDERS AND ACCESSORIES

CODE NO.	DESCRIPTION	
5-40701-22	Magnifier S	
5-41041-00	Magnifier Adaptor S	
5-40712-00	Angle Finder A-2	
5-40711-00	Angle Finder B	
5-59212-00	Eye Cup 4S	

DIOPTRIC ADJUSTMENT LENSES

5-05072-00	Dioptric Adjustment Lens S (+3)
5-05073-00	Dioptric Adjustment Lens S (+2)
5-05051-00	Dioptric Adjustment Lens S (+1.5)
5-05075-00	Dioptric Adjustment Lens S (+1)
5-05076-00	Dioptric Adjustment Lens S (+0.5)
5-05041-00	Dioptric Adjustment Lens S (0)
5-05078-00	Dioptric Adjustment Lens S (-0.5)
5-05079-00	Dioptric Adjustment Lens S (-2)
5-05081-00	Dioptric Adjustment Lens S (-3)
5-05082-00	Dioptric Adjustment Lens S (-4)

BOOSTER

5-60081-00 Booster in Case for Canon FTb

FLASH ACCESSORIES

5-00271-31	Speedlite 133D w/Flash Auto Ring A2 (for 50mm f1.8, 35mm f3.5, 35mm f2.0)
5-00271-32	Speedlite 133D w/Flash Auto Ring B2 (for 50mm f1.4, 35mm f3.5, 35mm f2.0)
5-02124-00	Flash Auto Ring A2
5-02125-00	Flash Auto Ring B2

GADGET BAGS

4-80024-00	Gadget Bag 4	
4-80025-00	Gadget Bag G-1	

MISCELLANEOUS ACCESSORIES

5-03111-00	Camera Holder F	
5-63061-00	Release 30	
5-63062-00	Release 50	

CASES

4-60862-01	Case L for FTb (for 55mm f1.2 lens)
4-60861-01	Case S for FTb (for 50mm f1.4, 50mm f1.8 lens)

MACROPHOTO & CLOSE-UP ACCESSORIES

4-20601-20	Copy Stand 4
4-25901-03	Handy Stand F55 set
4-26201-20	Photo Micro Unit F
4-25117-00	Macro Hood
4-25501-00	Microphoto Hood

CODE NO.	DESCRIPTION
4-25301-01	Extention Tube ABC Set
4-25301-00	Extension Tube A
4-25302-00	Extension Tube B
4-25303-00	Extension Tube C
4-25304-00	Extension Tube 25
4-25305-00	Extension Tube 50
4-25311-00	Extension Tube 75
4-25312-00	Extension Tube 100
4-25313-00	Extension Tube 150
4-25314-00	Extension Tube 200
4-25315-00	Extension Tube FL15
4-25321-00	Extension Tube FL25
4-25316-01	Extension Tube M Set
4-25316-00	Extension Tube M5
4-25317-00	Extension Tube M10
4-25322-00	Extension Tube M20
4-25403-00	55 Macrophoto Coupler
4-25404-00	58 Macrophoto Coupler
4-25405-00	48 Macrophoto Coupler
4-25701-00	FL48 Macrophoto Coupler
4-25711-00	FL58 Macrophoto Coupler
4-25721-00	FL55 Macrophoto Coupler
5-42011-00	Lens Mount Converter A
5-42021-00	Lens Mount Converter B
5-42031-00	Lens Mount Converter E
5-42071-00	Lens Mount Converter P
5-43231-01	58 Close-Up 450
5-43241-01	58 Close-Up 240
5-43251-01	48 Close-Up 450
5-43331-01	48 Close-Up 240
5-43571-00	55 Close-Up 450
5-43561-00	55 Close-Up 240
5-59042-20	Bellows FL
5-59043-00	Bellows M
5-59181-00	Slide Duplicator 48
5-59181-01	Slide Duplicator 55
43-6370	Attachment Ring 48 for Slide Duplicator
43-6371	Attachment Ring 55 for Slide Duplicator
43-6372	Attachment Ring 58 for Slide duplicator

BODY COVER

4-52021-00	Camera Cover R-F	
STRAP		
5-61141-00	Neck Strap 7 with pad	