

## FLASH UNIT BRACKET

Enables Canon Flash Unit Model Y to be used with synchronized cameras other than the Canon.

**BRACKET R**.....For Reflex Cameras

¥1,500 (\$5.28)

**BRACKET S**.....For other types of synchronized cameras

¥1,400 (\$3.89)

Both are available with Sync Cord "A", with ASA type terminal or "B", with Rollei type terminal.




## SHIELD SET AND SHIELD HOLDER

¥2,500 (\$8.06)

The set of shields consists of

- a. Clear.....for protective use
- b. Dimmer...for decreasing light volume
- c. Blue .....for color photography
- d. Diffuser...for casting soft light

(¥300 each)



Canon Camera Co., Inc.

312, Shimomaruko-cho, Ohta-ku, Tokyo, Japan Tel: 73-2191, 6111.

Ginza Service Station

Osaka Service Station

5-3 Ginza, Tokyo, Japan Tel: 57-3767

2 Umeda, Osaka, Japan Tel: 45-7331



# Canon flash units



# CANON FLASH UNIT Model Y

With 5" reflector and Capacitor Cell  
or Penlight Battery Cartridge



This Flash Unit is designed for all Canon Cameras with built-in flash synchronizer. A special mounting device allows the Flash Unit to be directly mounted on the camera so that the battery circuit is automatically connected to the internal synchronization circuit of the camera. This assures perfect contact at all times.

Only midget bulbs should be employed. Power sources of both "BC" type and "B" type are available.

The highly efficient reflector which has an adjustable range of uniform beam spread from 40° to 70°, permits maximum performance of any type of flash bulb with any Canon lens.

The built-in Micro Sync unit not only assures perfect synchronization but also allows the use of other types of bulb, such as peak bulbs, which are not actually designed for use with a focal plane shutter camera.

Model YK  
¥6,900 (\$19.17)  
without Tax  
¥5,570 (\$15.47)

Model YL  
¥6,200 (\$17.22)  
without Tax  
¥4,870 (\$13.53)

## CAPACITOR CELL

Contains a 200 MFD capacitor and 22 1/2 volt battery. This is a more effective power source than a D-size battery.

¥1,150 (\$3.19)



## PENLIGHT BATTERY CARTRIDGE

Takes 4 penlight batteries giving 6 volts. For use with one or two flash Unit.

¥450 (\$1.25)



## ADDITIONAL CAPACITOR (500 mfd)

Should be used in combination with the Capacitor Cell or with other types of power source then the Micro Sync is to be operated or when multiple flash photography is required.

¥800 (\$2.22)



## BATTERY EXTENSION CASE

For use with Main Flash Unit Model Y.  
Permits use of ADDITIONAL

CAPACITORS or D-size batteries.

type A.....For loading two ADDITIONAL  
or three D-size batteries.

type B.....For loading an ADDITIONAL  
CAPACITOR

type A ¥650 (\$1.81)

type B ¥550 (\$1.53)



## FLASH TESTER

Simplifies the test of internal syn-  
chronization circuit, extension  
circuit and flash bulb.

¥1,300 (\$3.61)



## MULTI-EXTENSION SOCKET

For connecting extension cords.

¥330 (¥92)



## CORD CONNECTOR

For connecting extension cords.

¥300 (¥82)



## EXTENSION CORDS

A1 .....15 feet


¥500 (\$1.38)

B1 .....1 foot

¥250 (¥69)

C1 .....3 feet

¥300 (¥83)

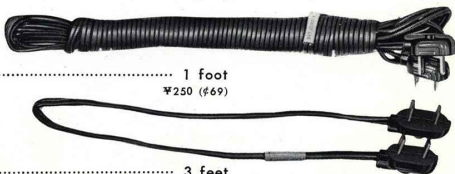


## CANON SIDE LIGHTING UNIT

Consists with 5" Reflector, Clamp, Swivel  
head with clamp screw and tripod socket,  
and 15-foot extension cord.

With Case... ¥5,500 (\$15.28)

Without Tax ¥4,570 (\$12.69)

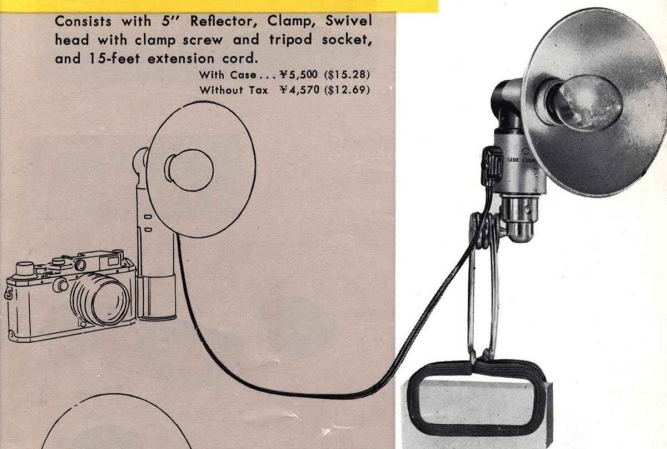

## SELF EXTENSION ADAPTOR

Enables the Flash Unit to be used off the  
camera or for connecting speed-light  
unit to the camera.

¥1,000 (\$2.78)

